

COSMO 971

COSMO SERIES

Cleanest combustion
High efficiency
Strong convection
Timeless design

DuplicAir[®] for simpel and easy
air control
Cast iron door
Self-closing door
Cast iron wood compartment door
Cast iron bottom
Cast iron top
Molded vermiculite
Self-cleaning window
Cold handle
5 year warranty

Can be purchased:

Customized floorplate out of 6 mm glass
Fresh air inlet ø 100 mm.



Find all models here
JYDEPEJSEN.COM


TECHNICAL DATA COSMO 971

Min./max. output	3 - 8 kW
Mean CO-emission	704 mg/Nm ³
Recommended chimney draft	12 pa
Weight	144 kg
Smoke outlet	Ø 150 mm
Diameter of fresh air intake	Ø 100 mm
Combustion chamber	415 x 365 x 325 mm
Efficiency	79%
Flue gas mass flow	5,5 G/S
Flue gas temperature	352 °C
Dust emission	10 mg/Nm ³
Type classification	BE
Defra / Area Smoke Control	✓
§15A.....	✓

CE approved
Defra approved

A

*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

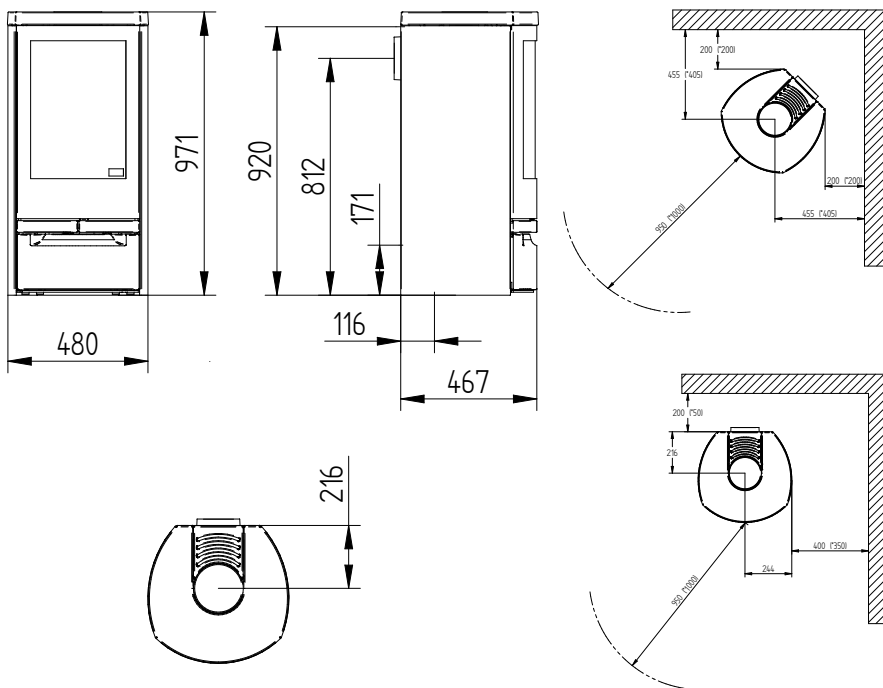

COSMO 971

SOAPSTONE

COSMO SERIES

Cleanest combustion
High efficiency
Strong convection
Timeless design

DuplicAir[®] for simpel and easy
air control
Cast iron door
Self-closing door
Cast iron wood compartment door
Cast iron bottom
Molded vermiculite
Self-cleaning window
Cold handle
5 year warranty

Can be purchased:

Customized floorplate out of 6 mm glass
Fresh air inlet ø 100 mm.



Find all models here
JYDEPEJSEN.COM


TECHNICAL DATA COSMO 971 SOAPSTONE

Min./max. output	3 - 8 kW
Mean CO-emission	704 mg/Nm ³
Recommended chimney draft	12 pa
Weight	247 kg
Smoke outlet	Ø 150 mm
Diameter of fresh air intake	Ø 100 mm
Combustion chamber	415 x 365 x 325 mm
Efficiency	79%
Flue gas mass flow	5,5 G/S
Flue gas temperature	352 °C
Dust emission	10 mg/Nm ³
Type classification	BE
Defra / Area Smoke Control	✓
§15A.....	✓

CE approved
Defra approved

A

*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

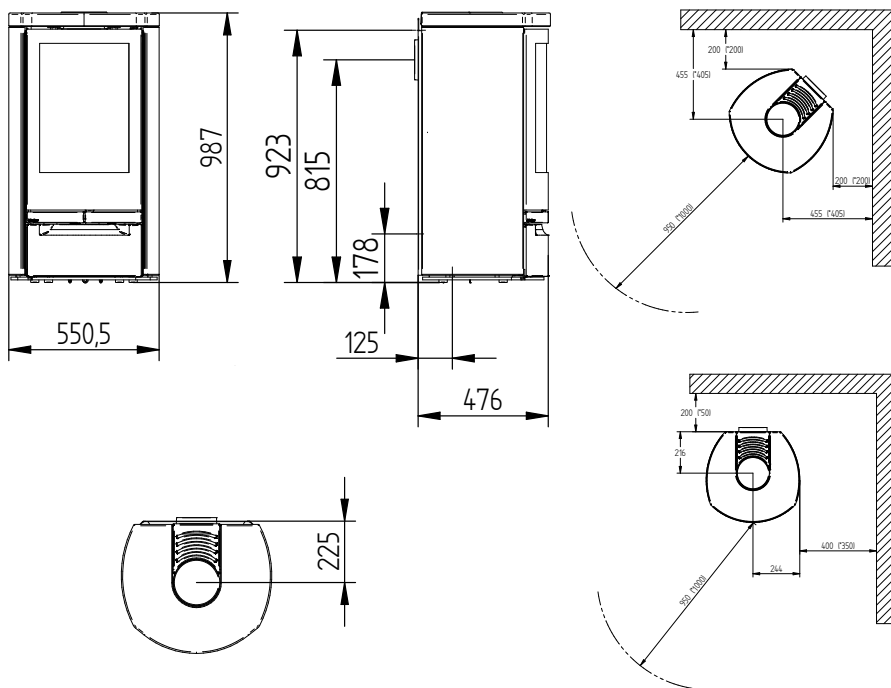

COSMO 971

SOAPSTONE SPECIAL

COSMO SERIES

Cleanest combustion
High efficiency
Strong convection
Timeless design

DuplicAir® for simpel and easy
air control
Cast iron door
Self-closing door
Cast iron wood compartment door
Cast iron bottom
Molded vermiculite
Self-cleaning window
Cold handle
5 year warranty

Can be purchased:

Customized floorplate out of 6 mm glass
Fresh air inlet ø 100 mm.



Find all models here
JYDEPEJSEN.COM




TECHNICAL DATA COSMO SOAPSTONE SPECIAL

Min./max. output	3 - 8 kW
Mean CO-emission	704 mg/Nm ³
Recommended chimney draft	12 pa
Weight	321 kg
Smoke outlet	Ø 150 mm
Diameter of fresh air intake	Ø 100 mm
Combustion chamber	415 x 365 x 325 mm
Efficiency	79%
Flue gas mass flow	5,5 G/S
Flue gas temperature	352 °C
Dust emission	10 mg/Nm ³
Type classification	BE
Defra / Area Smoke Control	✓
§15A.....	✓

CE approved
Defra approved

A

*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

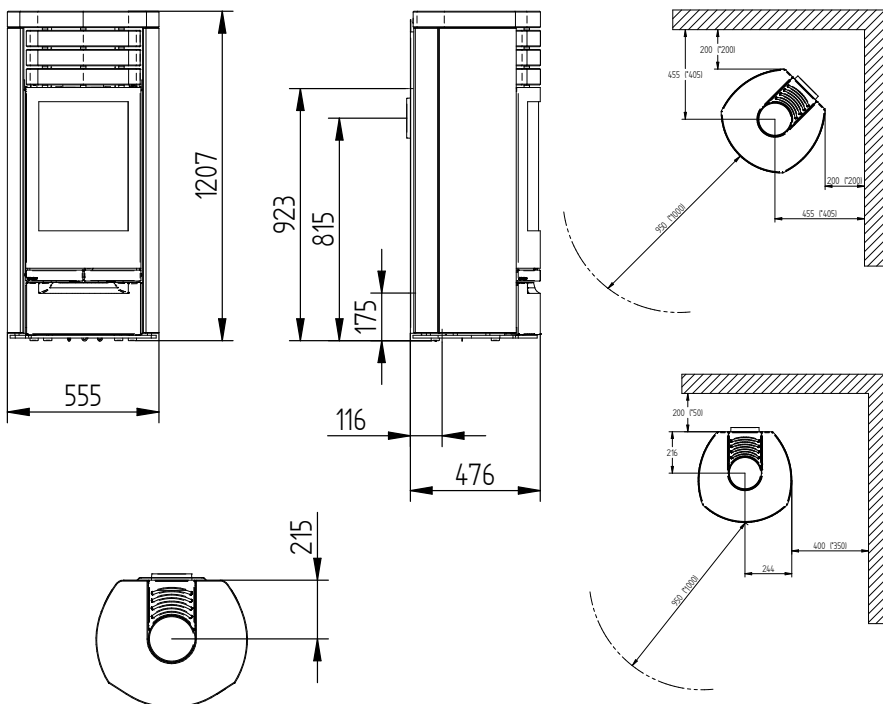

COSMO 1147

COSMO SERIES

Cleanest combustion
High efficiency
Strong convection
Timeless design

DuplicAir® for simpel and easy
air control
Cast iron door
Self-closing door
Cast iron wood compartment door
Cast iron bottom
Cast iron top
Molded vermiculite
Self-cleaning window
Cold handle
5 year warranty

Can be purchased:

Customized floorplate out of 6 mm glass
Fresh air inlet ø 100 mm.



Find all models here
JYDEPEJSEN.COM




TECHNICAL DATA COSMO 1147

Min./max. output	3 - 8 kW
Mean CO-emission	704 mg/Nm ³
Recommended chimney draft	12 pa
Weight	156 kg
Smoke outlet	Ø 150 mm
Diameter of fresh air intake	Ø 100 mm
Combustion chamber	415 x 365 x 325 mm
Efficiency	79%
Flue gas mass flow	5,5 G/S
Flue gas temperature	352 °C
Dust emission	10 mg/Nm ³
Type classification	BE
Defra / Area Smoke Control	✓
§15A.....	✓

CE approved
Defra approved

A

*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

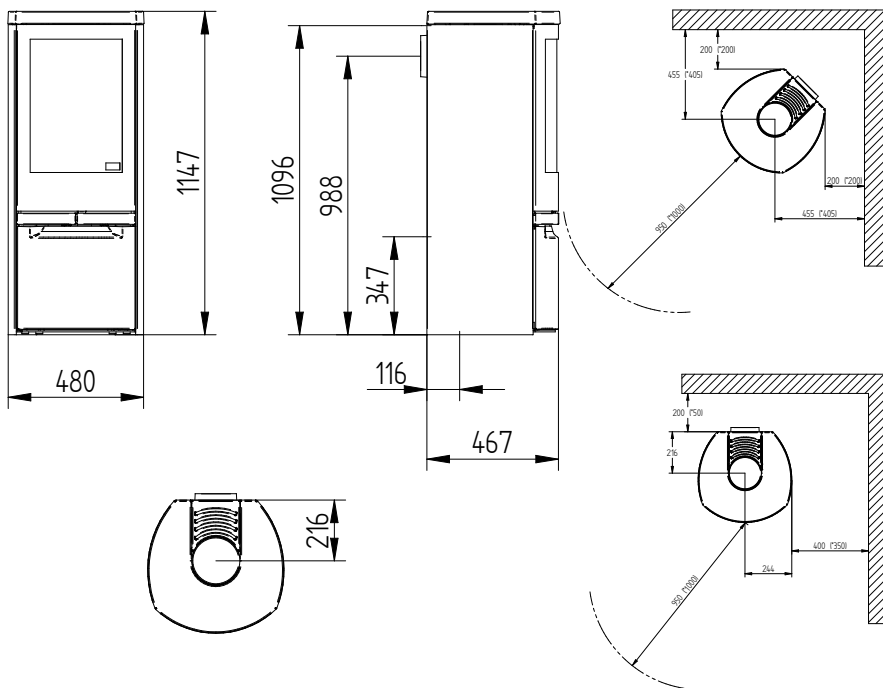

COSMO 1147

SOAPSTONE

COSMO SERIES

Cleanest combustion
High efficiency
Strong convection
Timeless design

DuplicAir® for simpel and easy
air control
Cast iron door
Self-closing door
Cast iron wood compartment door
Cast iron bottom
Molded vermiculite
Self-cleaning window
Cold handle
5 year warranty

Can be purchased:

Customized floorplate out of 6 mm glass
Fresh air inlet ø 100 mm.



Find all models here
JYDEPEJSEN.COM




TECHNICAL DATA COSMO 1147 SOAPSTONE

Min./max. output	3 - 8 kW
Mean CO-emission	704 mg/Nm ³
Recommended chimney draft	12 pa
Weight	276 kg
Smoke outlet	Ø 150 mm
Diameter of fresh air intake	Ø 100 mm
Combustion chamber	415 x 365 x 325 mm
Efficiency	79%
Flue gas mass flow	5,5 G/S
Flue gas temperature	352 °C
Dust emission	10 mg/Nm ³
Type classification	BE
Defra / Area Smoke Control	✓
§15A.....	✓

CE approved
Defra approved

A

*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

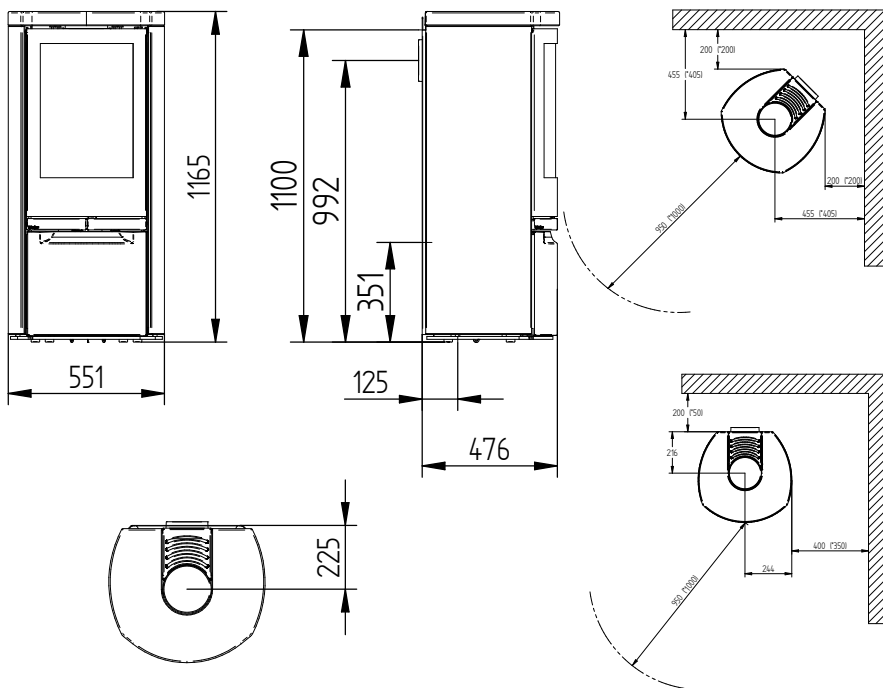

COSMO 1147

SOAPSTONE SPECIAL

COSMO SERIES

Cleanest combustion
High efficiency
Strong convection
Timeless design

DuplicAir® for simpel and easy
air control
Cast iron door
Self-closing door
Cast iron wood compartment door
Cast iron bottom
Molded vermiculite
Self-cleaning window
Cold handle
5 year warranty

Can be purchased:

Customized floorplate out of 6 mm glass
Fresh air inlet ø 100 mm.



Find all models here
JYDEPEJSEN.COM




TECHNICAL DATA COSMO 1147 SOAPSTONE SPECIAL

Min./max. output	3 - 8 kW
Mean CO-emission	704 mg/Nm ³
Recommended chimney draft	12 pa
Weight	342 kg
Smoke outlet	Ø 150 mm
Diameter of fresh air intake	Ø 100 mm
Combustion chamber	415 x 365 x 325 mm
Efficiency	79%
Flue gas mass flow	5,5 G/S
Flue gas temperature	352 °C
Dust emission	10 mg/Nm ³
Type classification	BE
Defra / Area Smoke Control	✓
§15A.....	✓

CE approved
Defra approved

A

*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

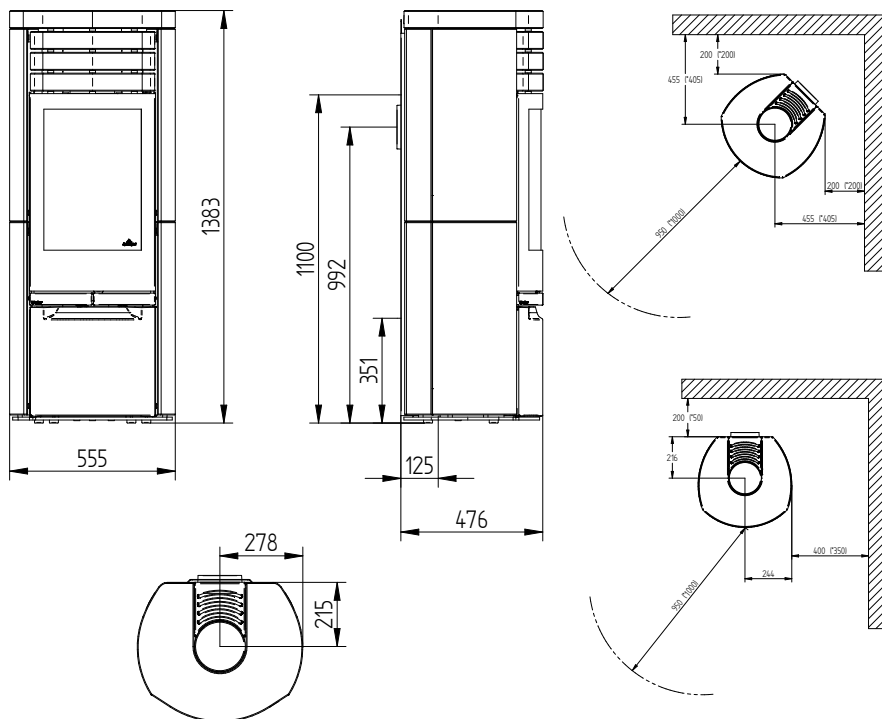

COSMO 1500

COSMO SERIES

Cleanest combustion
High efficiency
Strong convection
Timeless design

DuplicAir® for simpel and easy
air control
Cast iron door
Self-closing door
Cast iron wood compartment door
Cast iron bottom
Cast iron top
Molded vermiculite
Self-cleaning window
Cold handle
5 year warranty

Can be purchased:

Customized floorplate out of 6 mm glass
Fresh air inlet ø 100 mm.
Accumulation stone, 45 kg.



Find all models here
JYDEPEJSEN.COM




TECHNICAL DATA COSMO 1500

Min./max. output	3 - 8 kW
Mean CO-emission	704 mg/Nm ³
Recommended chimney draft	12 pa
Weight	165 kg
Smoke outlet	Ø 150 mm
Accumulation stone	45 kg - Optional
Diameter of fresh air intake	Ø 100 mm
Combustion chamber	415 x 365 x 325 mm
Efficiency	79%
Flue gas mass flow	5,5 G/S
Flue gas temperature	352 °C
Dust emission	10 mg/Nm ³
Type classification	BE
Defra / Area Smoke Control	✓
§15A.....	✓

CE approved
Defra approved

A

*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

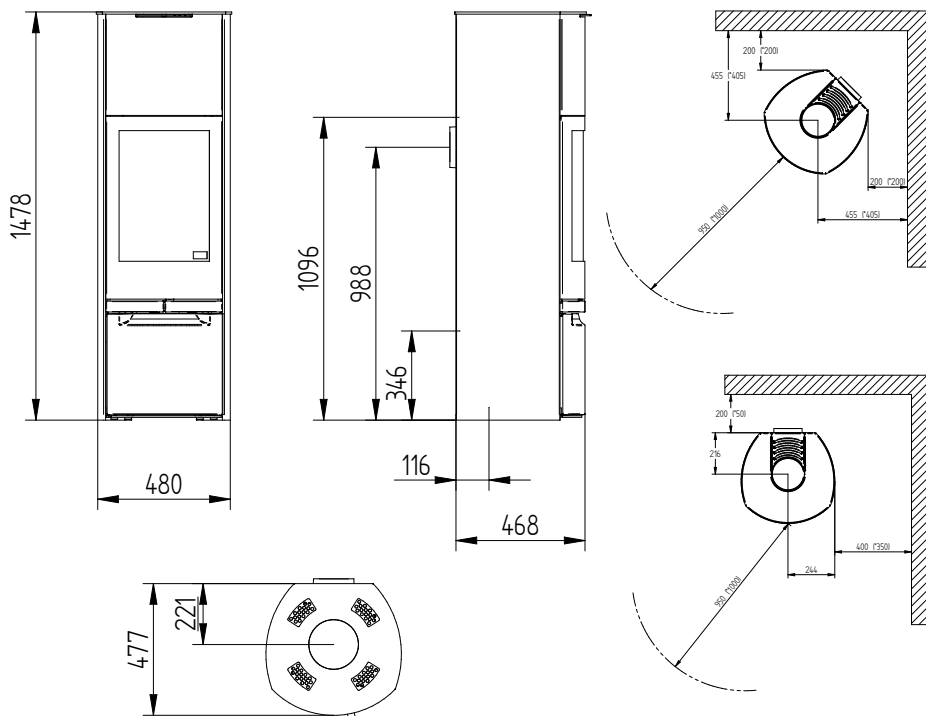

COSMO 1500

SOAPSTONE

COSMO SERIES

Cleanest combustion
High efficiency
Strong convection
Timeless design

DuplicAir[®] for simpel and easy
air control
Cast iron door
Self-closing door
Cast iron wood compartment door
Cast iron bottom
Molded vermiculite
Self-cleaning window
Cold handle
5 year warranty

Can be purchased:

Customized floorplate out of 6 mm glass
Fresh air inlet ø 100 mm.
Accumulation stone, 45 kg.



Find all models here
JYDEPEJSEN.COM




TECHNICAL DATA COSMO 1500 SOAPSTONE

Min./max. output	3 - 8 kW
Mean CO-emission	704 mg/Nm ³
Recommended chimney draft	12 pa
Weight	320 kg
Smoke outlet	Ø 150 mm
Accumulation stone	45 kg - Optional
Diameter of fresh air intake	Ø 100 mm
Combustion chamber	415 x 365 x 325 mm
Efficiency	79%
Flue gas mass flow	5,5 G/S
Flue gas temperature	352 °C
Dust emission	10 mg/Nm ³
Type classification	BE
Defra / Area Smoke Control	✓
§15A.....	✓

CE approved
Defra approved

A

*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

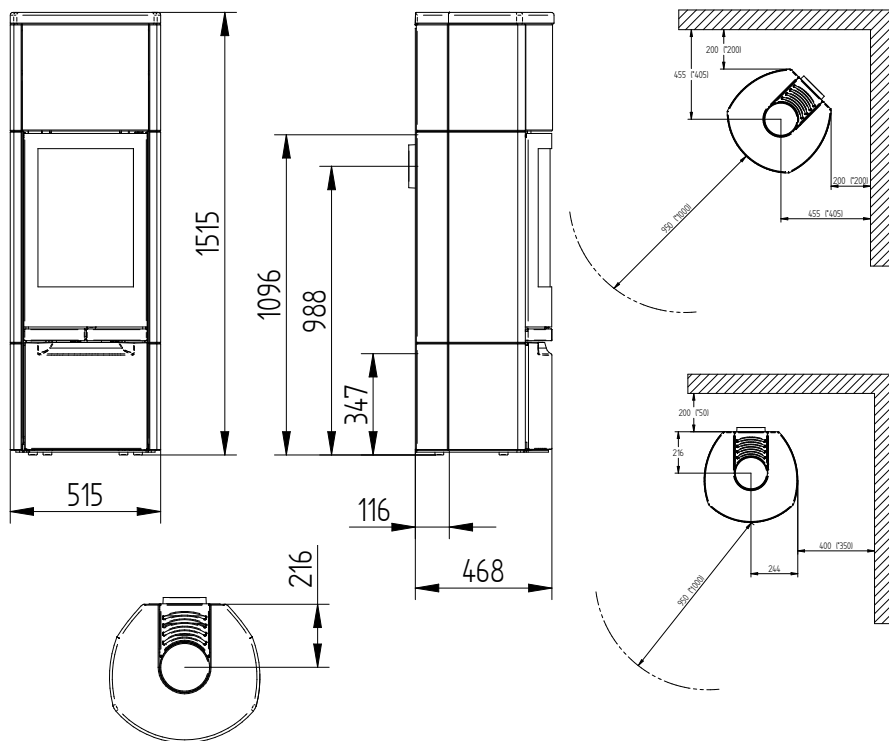

COSMO CLASSIC

COSMO SERIES

Cleanest combustion
High efficiency
Strong convection
Timeless design

DuplicAir[®] for simpel and easy
air control
Cast iron door
Self-closing door
Cast iron bottom
Cast iron top
Molded vermiculite
Self-cleaning window
Cold handle
5 year warranty

Can be purchased:
Fresh air inlet ø 100 mm.



Find all models here
JYDEPEJSEN.COM

TECHNICAL DATA COSMO CLASSIC

Min./max. output	3 - 8 kW
Mean CO-emission	704 mg/Nm ³
Recommended chimney draft	12 pa
Weight	377 kg
Smoke outlet	Ø 150 mm
Accumulation stone	45 kg - Optional
Diameter of fresh air intake	Ø 100 mm
Combustion chamber	415 x 365 x 325 mm
Efficiency	79%
Flue gas mass flow	5,5 G/S
Flue gas temperature	352 °C
Dust emission	10 mg/Nm ³
Type classification	BE
Defra / Area Smoke Control	✓
§15A.....	✓

CE approved
Defra approved

A

*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

