

COUNTRY 575

COUNTRY SERIES

Good craftsmanship
Cleanest combustion
High efficiency
Strong convection

DuplicAir[®] for simpel and easy air control
Self-closing door
Cast iron bottom
Hidden ash pan
Molded vermiculite
Self-cleaning window
5 year warranty

Can be purchased:
Fresh air inlet



Find all models here
JYDEPEJSEN.COM


TECHNICAL DATA COUNTRY 575

Min./max. output	3 - 5 kW
Mean CO-emission	1492 mg/Nm ³
Recommended chimney draft	12 pa
Weight	94 kg
Smoke outlet	Ø 150 mm
Diameter of fresh air intake	Ø 100 mm
Combustion chamber	250 x 392 x 282 mm
Efficiency	81 %
Flue gas mass flow	4,5 G/S
Flue gas temperature	275 °C
Dust emission	29 mg/Nm ³
Type classification	BE
Defra / Area Smoke Control	✓
§15A.....	✓

CE approved
Defra approved

A

*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

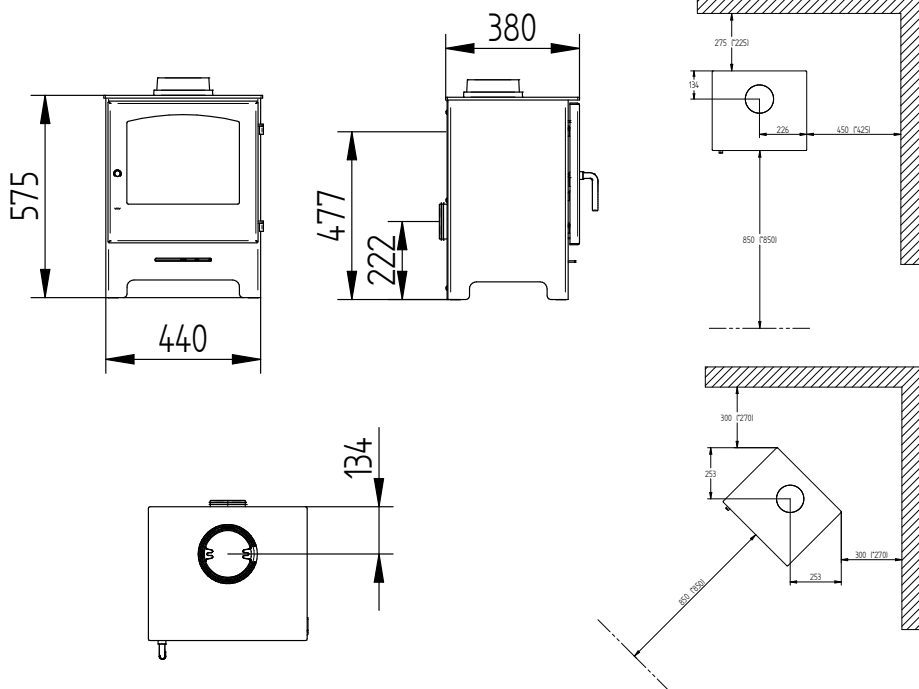

COUNTRY 765

COUNTRY SERIES

Good craftsmanship
Cleanest combustion
High efficiency
Strong convection

DuplicAir[®] for simpel and easy air control
Self-closing door
Cast iron bottom
Hidden ash pan
Molded vermiculite
Self-cleaning window
5 year warranty

Can be purchased:
Fresh air inlet



Find all models here
JYDEPEJSEN.COM

TECHNICAL DATA COUNTRY 765

Min./max. output	3 - 5 kW
Mean CO-emission	1492 mg/Nm ³
Recommended chimney draft	12 pa
Weight	100 kg
Smoke outlet	Ø 150 mm
Diameter of fresh air intake	Ø 100 mm
Combustion chamber	250 x 392 x 282 mm
Efficiency	81 %
Flue gas mass flow	4,5 G/S
Flue gas temperature	275 °C
Dust emission	29 mg/Nm ³
Type classification	BE
Defra / Area Smoke Control	✓
§15A.....	✓

CE approved
Defra approved

A

*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

