

COZY CLASSIC

COZY SERIES

Cleanest combustion
High efficiency
Strong convection
Timeless design

DuplicAir[®] for simpel and easy
air control
Cast iron door
Cast iron front
Self-closing door with magnets
Start-up function
Cast iron bottom
Cast iron top
Molded vermiculite
Self-cleaning window
Cold handle
5 year warranty

Can be purchased:

Customized floorplate out of 6 mm glass
Fresh air inlet ø 100 mm.



Find all models here
JYDEPEJSEN.COM




TECHNICAL DATA COZY CLASSIC

Min./max. output	3 - 8 kW
Mean CO-emission	704 mg/Nm ³
Recommended chimney draft	12 pa
Weight	142 kg
Smoke outlet	Ø 150 mm
Diameter of fresh air intake	Ø 100 mm - Optional
Combustion chamber	415 x 365 x 325 mm
Efficiency	79%
Flue gas mass flow	5,5 G/S
Flue gas temperature	352 °C
Particulate emission	10 mg/Nm ³
Type classification	BE
Defra / Area Smoke Control	✓
§15A.....	✓

CE approved
Defra approved

A

*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

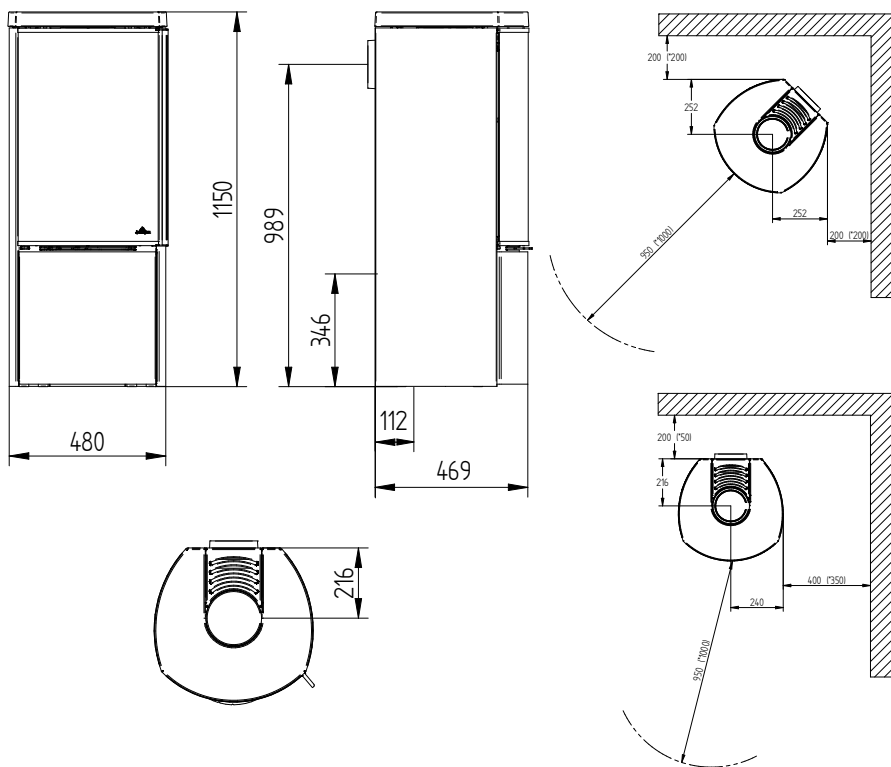

COZY CLASSIC

W/SIDE GLASS

COZY SERIES

Cleanest combustion
High efficiency
Strong convection
Timeless design

DuplicAir[®] for simpel and easy
air control
Cast iron door
Cast iron front
Self-closing door with magnets
Start-up function
Cast iron bottom
Cast iron top
Molded vermiculite
Self-cleaning window
Cold handle
5 year warranty

Can be purchased:

Customized floorplate out of 6 mm glass
Fresh air inlet ø 100 mm.



Find all models here
JYDEPEJSEN.COM




TECHNICAL DATA COZY W/SIDE GLASS

Min./max. output	3 - 8 kW
Mean CO-emission	704 mg/Nm ³
Recommended chimney draft	12 pa
Weight	140 kg
Smoke outlet	Ø 150 mm
Diameter of fresh air intake	Ø 100 mm - Optional
Combustion chamber	415 x 365 x 325 mm
Efficiency	79%
Flue gas mass flow	5,5 G/S
Flue gas temperature	352 °C
Particulate emission	10 mg/Nm ³
Type classification	BE
Defra / Area Smoke Control	✓
§15A.....	✓

CE approved
Defra approved

A

*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

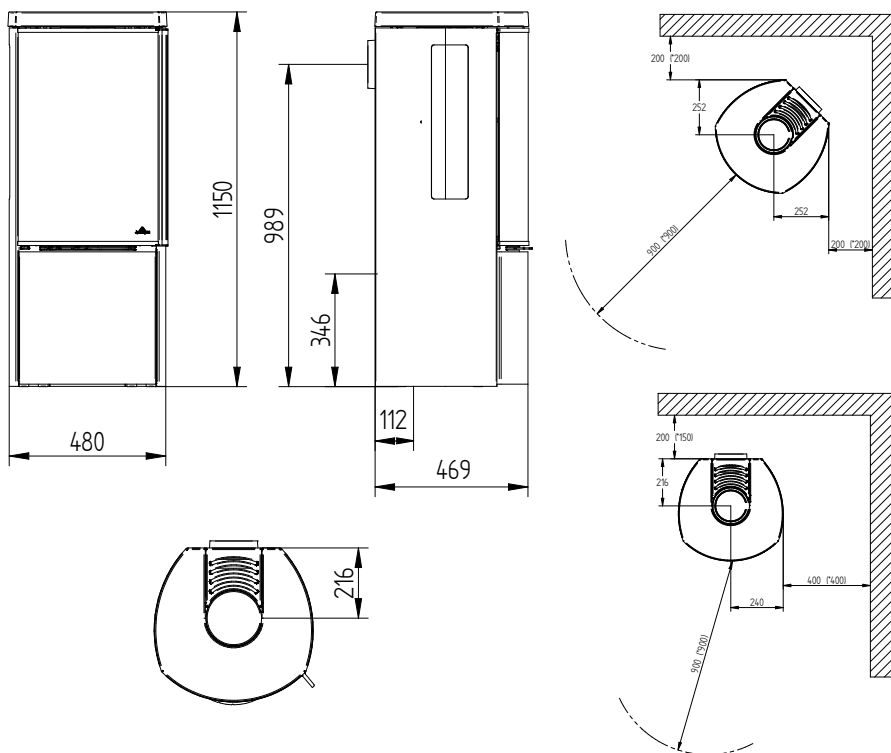

COZY CLASSIC

SOAPSTONE

COZY SERIES

Cleanest combustion
High efficiency
Strong convection
Timeless design

DuplicAir® for simpel and easy
air control
Cast iron door
Cast iron front
Self-closing door with magnets
Start-up function
Cast iron bottom
Cast iron top
Molded vermiculite
Self-cleaning window
Cold handle
5 year warranty

Can be purchased:

Customized floorplate out of 6 mm glass
Fresh air inlet ø 100 mm.



Find all models here
JYDEPEJSEN.COM




TECHNICAL DATA COZY CLASSIC SOAPSTONE

Min./max. output	3 - 8 kW
Mean CO-emission	704 mg/Nm ³
Recommended chimney draft	12 pa
Weight	313 kg
Smoke outlet	Ø 150 mm
Diameter of fresh air intake	Ø 100 mm - Optional
Combustion chamber	415 x 365 x 325 mm
Efficiency	79%
Flue gas mass flow	5,5 G/S
Flue gas temperature	352 °C
Particulate emission	10 mg/Nm ³
Type classification	BE
Defra / Area Smoke Control	✓
§15A.....	✓

CE approved
Defra approved

A

*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

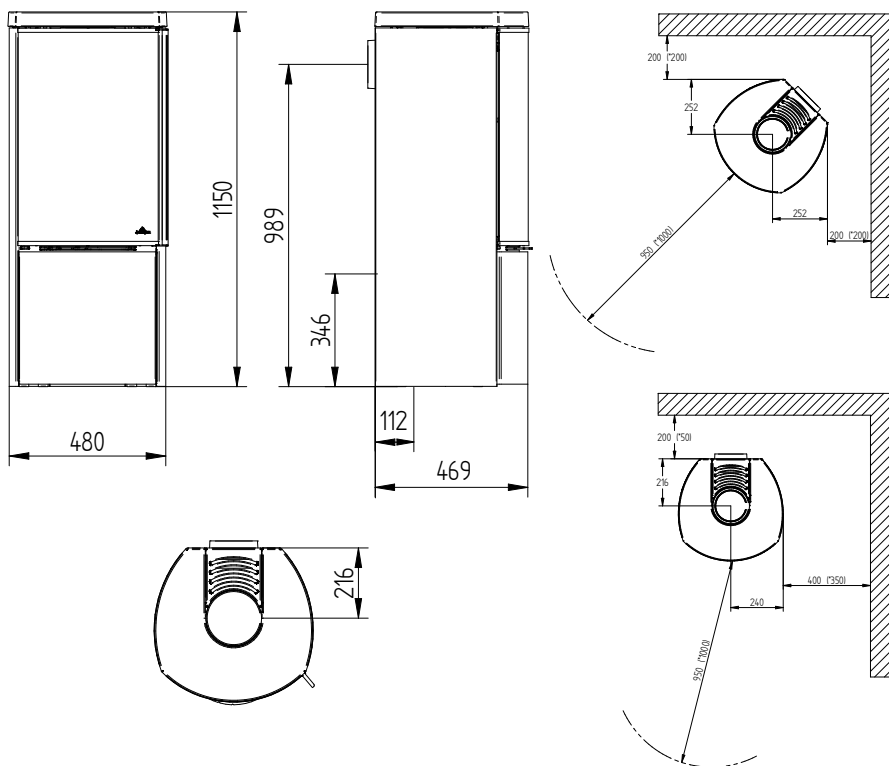

COZY CLASSIC

SOAPSTONE W/SIDE GLASS

COZY SERIES

Cleanest combustion
High efficiency
Strong convection
Timeless design

DuplicAir[®] for simpel and easy
air control
Cast iron door
Cast iron front
Self-closing door with magnets
Start-up function
Cast iron bottom
Cast iron top
Molded vermiculite
Self-cleaning window
Cold handle
5 year warranty

Can be purchased:

Customized floorplate out of 6 mm glass
Fresh air inlet ø 100 mm.



Find all models here
JYDEPEJSEN.COM




TECHNICAL DATA COZY CLASSIC SOAPSTONE W/SIDE GLASS

Min./max. output	3 - 8 kW
Mean CO-emission	704 mg/Nm ³
Recommended chimney draft	12 pa
Weight	282 kg
Smoke outlet	Ø 150 mm
Diameter of fresh air intake	Ø 100 mm - Optional
Combustion chamber	415 x 365 x 325 mm
Efficiency	79%
Flue gas mass flow	5,5 G/S
Flue gas temperature	352 °C
Particulate emission	10 mg/Nm ³
Type classification	BE
Defra / Area Smoke Control	✓
§15A.....	✓

CE approved
Defra approved

A⁺

*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

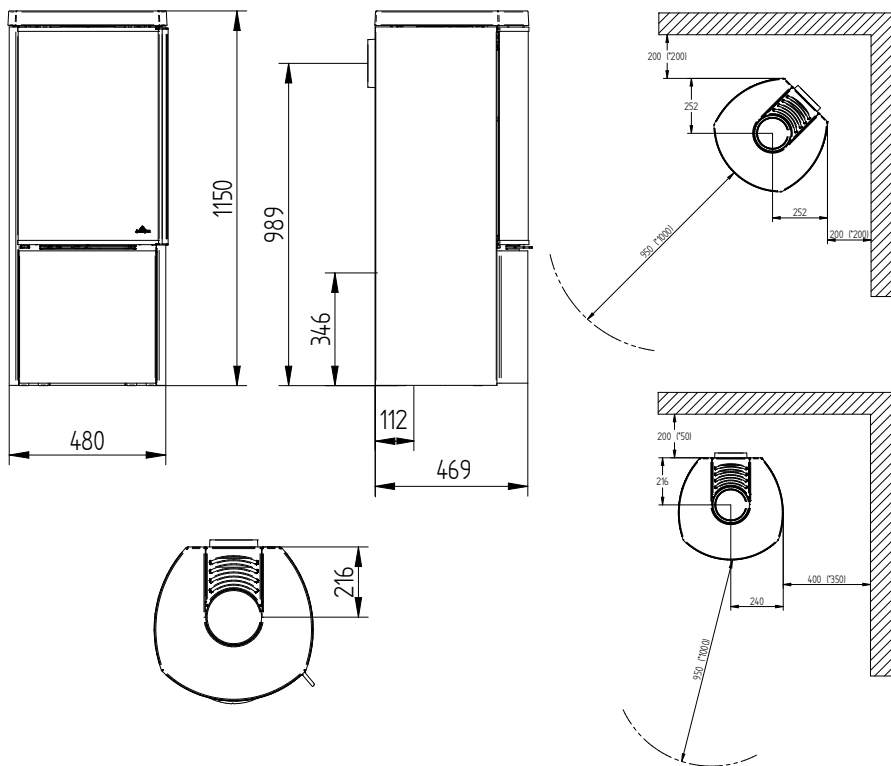

COZY CLASSIC

HIGH

COZY SERIES

Cleanest combustion
High efficiency
Strong convection
Timeless design

DuplicAir[®] for simpel and easy
air control
Cast iron door
Cast iron front
Self-closing door with magnets
Start-up function
Cast iron bottom
Molded vermiculite
Self-cleaning window
Cold handle
5 year warranty

Can be purchased:

Customized floorplate out of 6 mm glass
Fresh air inlet ø 100 mm.
Accumulation stone, 45 kg.



Find all models here
JYDEPEJSEN.COM




TECHNICAL DATA COZY CLASSIC HIGH

Min./max. output	3 - 8 kW
Mean CO-emission	704 mg/Nm ³
Recommended chimney draft	12 pa
Weight	150 kg
Smoke outlet	Ø 150 mm
Diameter of fresh air intake	Ø 100 mm - Optional
Combustion chamber	415 x 365 x 325 mm
Efficiency	79%
Flue gas mass flow	5,5 G/S
Flue gas temperature	352 °C
Particulate emission	10 mg/Nm ³
Type classification	BE
Defra / Area Smoke Control	✓
§15A.....	✓

CE approved
Defra approved

A

*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

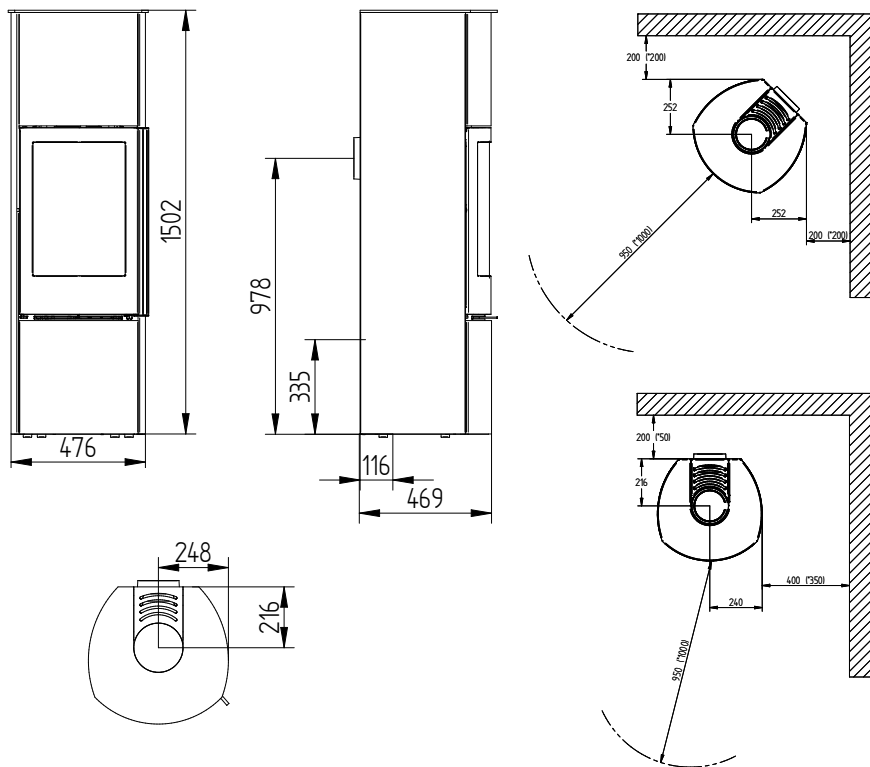

COZY CLASSIC

HIGH W/SIDE GLASS

COZY SERIES

Cleanest combustion
High efficiency
Strong convection
Timeless design

DuplicAir[®] for simpel and easy
air control
Cast iron door
Cast iron front
Self-closing door with magnets
Start-up function
Cast iron bottom
Molded vermiculite
Self-cleaning window
Cold handle
5 year warranty

Can be purchased:

Customized floorplate out of 6 mm glass
Fresh air inlet ø 100 mm.
Accumulation stone, 45 kg.



Find all models here
JYDEPEJSEN.COM






TECHNICAL DATA COZY CLASSIC HIGH W/SIDE GLASS

Min./max. output	3 - 8 kW
Mean CO-emission	704 mg/Nm ³
Recommended chimney draft	12 pa
Weight	148 kg
Smoke outlet	Ø 150 mm
Diameter of fresh air intake	Ø 100 mm - Optional
Combustion chamber	415 x 365 x 325 mm
Efficiency	79%
Flue gas mass flow	5,5 G/S
Flue gas temperature	352 °C
Particulate emission	10 mg/Nm ³
Type classification	BE
Defra / Area Smoke Control	✓
§15A.....	✓

CE approved
Defra approved

A

*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

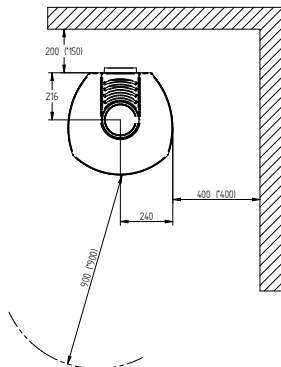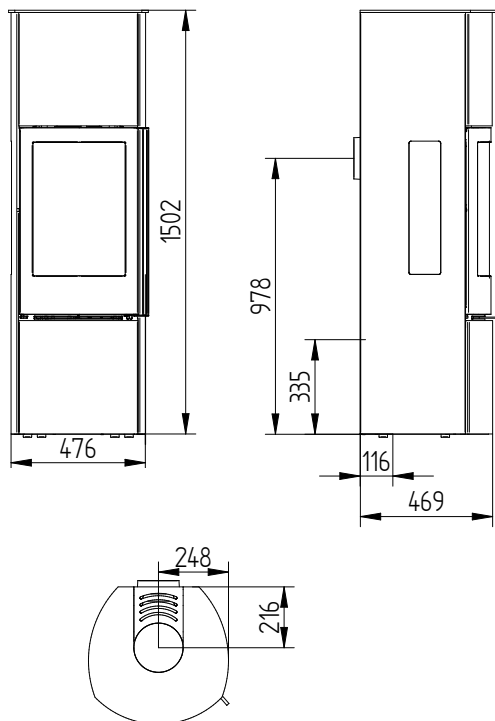

COZY CLASSIC

LOW

COZY SERIES

Cleanest combustion
High efficiency
Strong convection
Timeless design

DuplicAir[®] for simpel and easy
air control
Cast iron door
Cast iron front
Self-closing door with magnets
Start-up function
Cast iron bottom
Cast iron top
Molded vermiculite
Self-cleaning window
Cold handle
5 year warranty

Can be purchased:

Customized floorplate out of 6 mm glass
Fresh air inlet ø 100 mm.



Find all models here
JYDEPEJSEN.COM




TECHNICAL DATA COZY CLASSIC LOW

Min./max. output	3 - 8 kW
Mean CO-emission	704 mg/Nm ³
Recommended chimney draft	12 pa
Weight	131 kg
Smoke outlet	Ø 150 mm
Diameter of fresh air intake	Ø 100 mm - Optional
Combustion chamber	415 x 365 x 325 mm
Efficiency	79%
Flue gas mass flow	5,5 G/S
Flue gas temperature	352 °C
Particulate emission	10 mg/Nm ³
Type classification	BE
Defra / Area Smoke Control	✓
§15A.....	✓

CE approved
Defra approved

A

*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

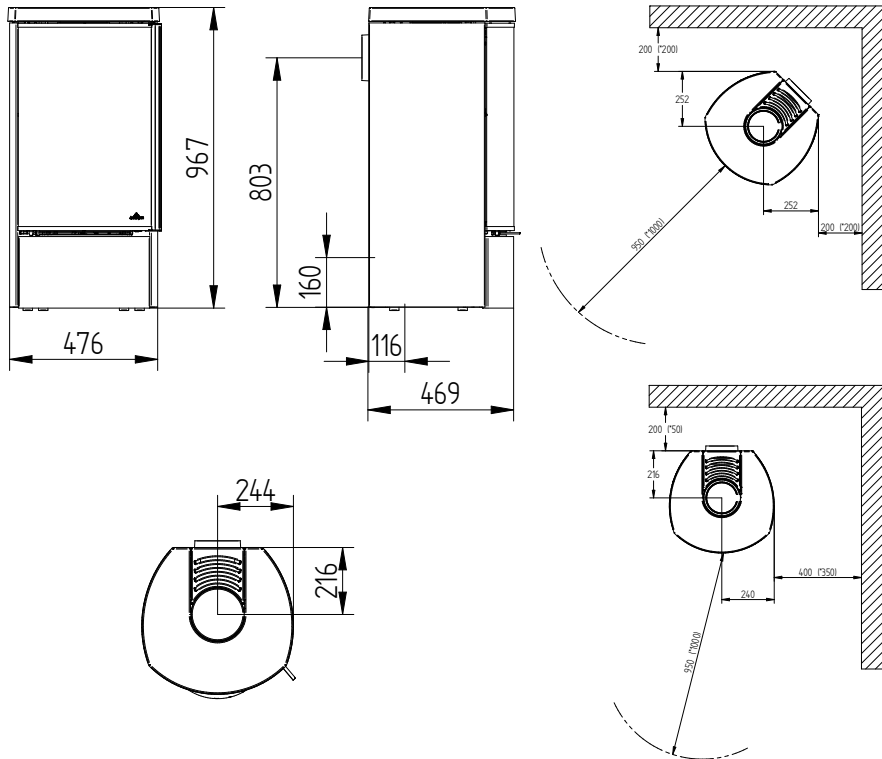

COZY CLASSIC

LOW W/SIDE GLASS

COZY SERIES

Cleanest combustion
High efficiency
Strong convection
Timeless design

DuplicAir[®] for simpel and easy
air control
Cast iron door
Cast iron front
Self-closing door with magnets
Start-up function
Cast iron bottom
Cast iron top
Molded vermiculite
Self-cleaning window
Cold handle
5 year warranty

Can be purchased:

Customized floorplate out of 6 mm glass
Fresh air inlet ø 100 mm.



Find all models here
JYDEPEJSEN.COM






TECHNICAL DATA COZY LOW W/SIDE GLASS

Min./max. output	3 - 8 kW
Mean CO-emission	704 mg/Nm ³
Recommended chimney draft	12 pa
Weight	129 kg
Smoke outlet	Ø 150 mm
Diameter of fresh air intake	Ø 100 mm - Optional
Combustion chamber	415 x 365 x 325 mm
Efficiency	79%
Flue gas mass flow	5,5 G/S
Flue gas temperature	352 °C
Particulate emission	10 mg/Nm ³
Type classification	BE
Defra / Area Smoke Control	✓
§15A.....	✓

CE approved
Defra approved

A

*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

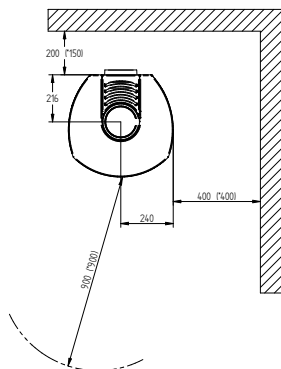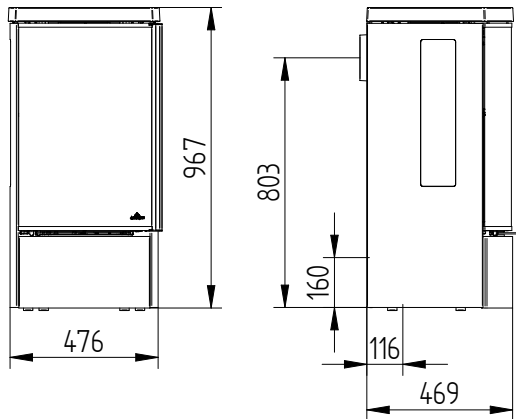

COZY CLASSIC

BASE

COZY SERIES

Cleanest combustion
High efficiency
Strong convection
Timeless design

DuplicAir® for simpel and easy
air control
Cast iron door
Cast iron front
Self-closing door with magnets
Start-up function
Cast iron bottom
Cast iron top
Molded vermiculite
Self-cleaning window
Cold handle
5 year warranty

Can be purchased:

Customized floorplate out of 6 mm glass
Fresh air inlet ø 100 mm.



Find all models here
JYDEPEJSEN.COM




TECHNICAL DATA COZY CLASSIC BASE

Min./max. output	3 - 8 kW
Mean CO-emission	704 mg/Nm ³
Recommended chimney draft	12 pa
Weight	140 kg
Smoke outlet	Ø 150 mm
Diameter of fresh air intake	Ø 100 mm - Optional
Combustion chamber	415 x 365 x 325 mm
Efficiency	79%
Flue gas mass flow	5,5 G/S
Flue gas temperature	352 °C
Particulate emission	10 mg/Nm ³
Type classification	BE
Defra / Area Smoke Control	✓
§15A.....	✓

CE approved
Defra approved

A

*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

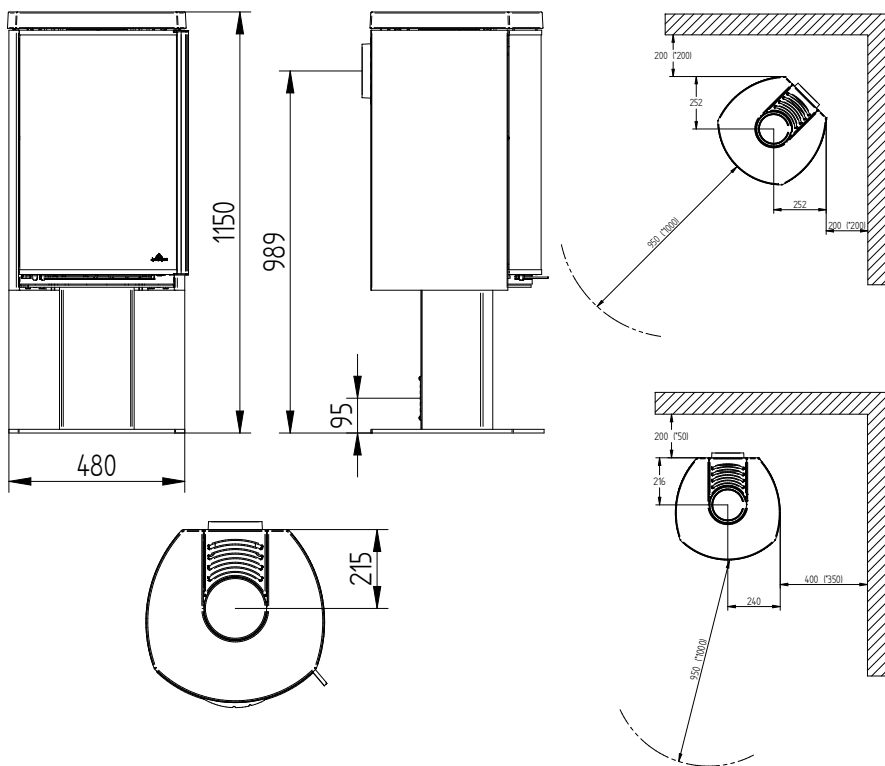

COZY CLASSIC

BASE W/SIDE GLASS

COZY SERIES

Cleanest combustion
High efficiency
Strong convection
Timeless design

DuplicAir® for simpel and easy
air control
Cast iron door
Cast iron front
Self-closing door with magnets
Start-up function
Cast iron bottom
Cast iron top
Molded vermiculite
Self-cleaning window
Cold handle
5 year warranty

Can be purchased:

Customized floorplate out of 6 mm glass
Fresh air inlet ø 100 mm.



Find all models here
JYDEPEJSEN.COM




TECHNICAL DATA COZY CLASSIC BASE W/SIDE GLASS

Min./max. output	3 - 8 kW
Mean CO-emission	704 mg/Nm ³
Recommended chimney draft	12 pa
Weight	140 kg
Smoke outlet	Ø 150 mm
Diameter of fresh air intake	Ø 100 mm - Optional
Combustion chamber	415 x 365 x 325 mm
Efficiency	79%
Flue gas mass flow	5,5 G/S
Flue gas temperature	352 °C
Particulate emission	10 mg/Nm ³
Type classification	BE
Defra / Area Smoke Control	✓
§15A.....	✓

CE approved
Defra approved

A

*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

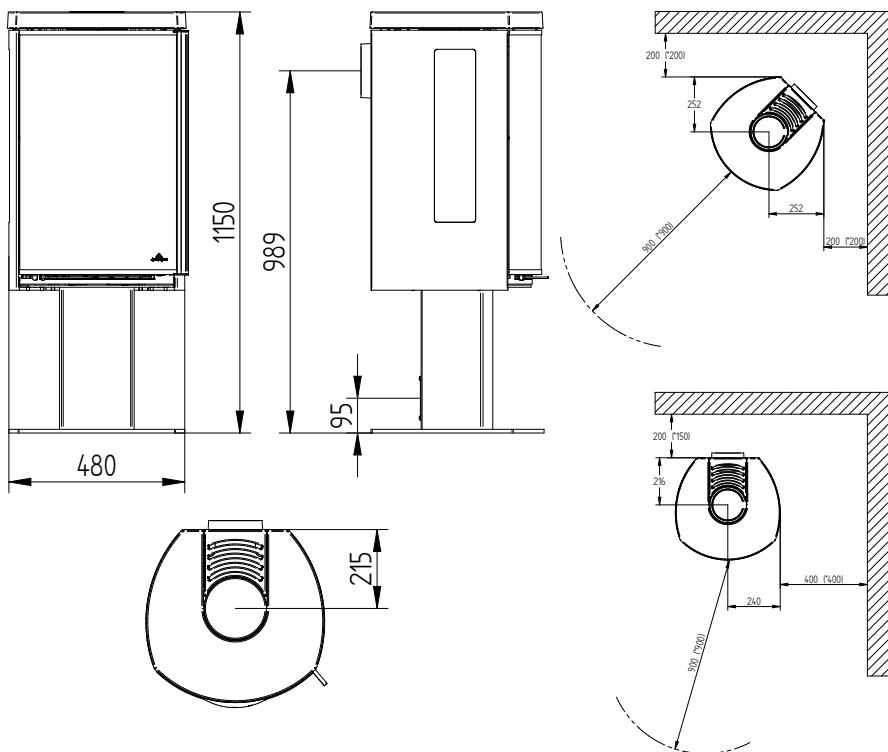

COZY CLASSIC

WALL

COZY SERIES

Cleanest combustion
High efficiency
Strong convection
Timeless design

DuplicAir[®] for simpel and easy
air control
Cast iron door
Cast iron front
Self-closing door with magnets
Start-up function
Cast iron bottom
Cast iron top
Molded vermiculite
Self-cleaning window
Cold handle
5 year warranty

Can be purchased:
Fresh air inlet ø 100 mm.



Find all models here
JYDEPEJSEN.COM


TECHNICAL DATA COZY CLASSIC WALL

Min./max. output	3 - 8 kW
Mean CO-emission	704 mg/Nm ³
Recommended chimney draft	12 pa
Weight	108 kg
Smoke outlet	Ø 150 mm
Diameter of fresh air intake	Ø 100 mm - Optional
Combustion chamber	415 x 365 x 325 mm
Efficiency	79%
Flue gas mass flow	5,5 G/S
Flue gas temperature	352 °C
Particulate emission	10 mg/Nm ³
Type classification	BE
Defra / Area Smoke Control	✓
§15A.....	✓

CE approved
Defra approved

A

*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

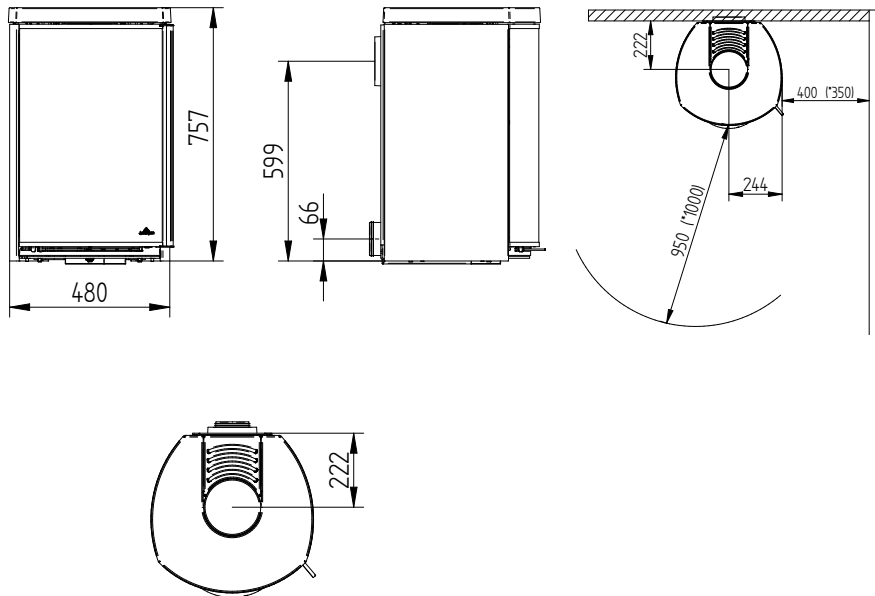

COZY CLASSIC

WALL W/SIDE GLASS

COZY SERIES

Cleanest combustion
High efficiency
Strong convection
Timeless design

DuplicAir® for simpel and easy
air control
Cast iron door
Cast iron front
Self-closing door with magnets
Start-up function
Cast iron bottom
Cast iron top
Molded vermiculite
Self-cleaning window
Cold handle
5 year warranty

Can be purchased:

Fresh air inlet ø 100 mm.



Find all models here
JYDEPEJSEN.COM


TECHNICAL DATA COZY CLASSIC WALL W/SIDE GLASS

Min./max. output	3 - 8 kW
Mean CO-emission	704 mg/Nm ³
Recommended chimney draft	12 pa
Weight	108 kg
Smoke outlet	Ø 150 mm
Diameter of fresh air intake	Ø 100 mm - Optional
Combustion chamber	415 x 365 x 325 mm
Efficiency	79%
Flue gas mass flow	5,5 G/S
Flue gas temperature	352 °C
Particulate emission	10 mg/Nm ³
Type classification	BE
Defra / Area Smoke Control	✓
§15A.....	✓

CE approved
Defra approved

A

*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

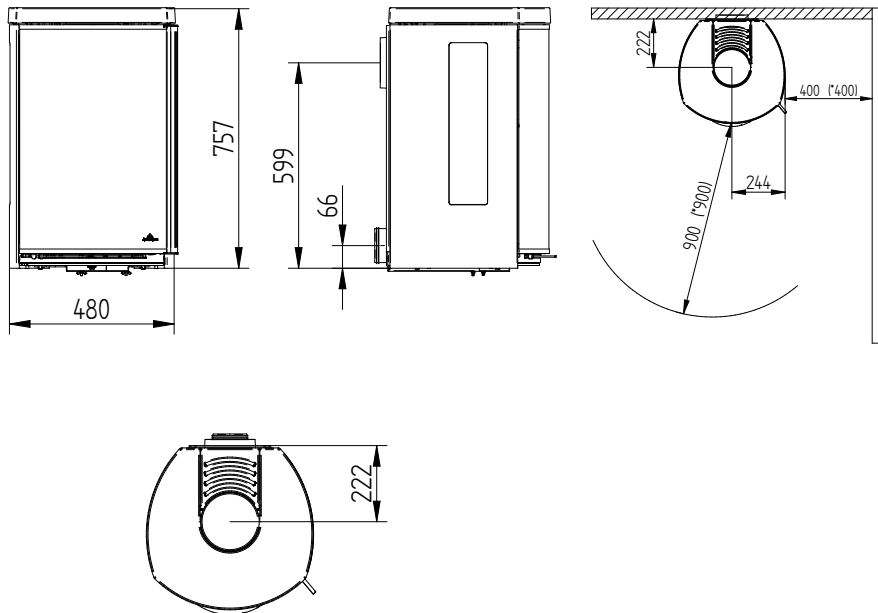

COZY CLASSIC

DARK SANDSTONE

COZY SERIES

Cleanest combustion
High efficiency
Strong convection
Timeless design

DuplicAir® for simpel and easy
air control
Cast iron door
Cast iron front
Self-closing door with magnets
Start-up function
Cast iron bottom
Cast iron top
Molded vermiculite
Self-cleaning window
Cold handle
5 year warranty

Can be purchased:

Customized floorplate out of 6 mm glass
Fresh air inlet ø 100 mm.



Find all models here
JYDEPEJSEN.COM




TECHNICAL DATA COZY CLASSIC DARK SANDSTONE

Min./max. output	3 - 8 kW
Mean CO-emission	704 mg/Nm ³
Recommended chimney draft	12 pa
Weight	313 kg
Smoke outlet	Ø 150 mm
Diameter of fresh air intake	Ø 100 mm - Optional
Combustion chamber	415 x 365 x 325 mm
Efficiency	79%
Flue gas mass flow	5,5 G/S
Flue gas temperature	352 °C
Particulate emission	10 mg/Nm ³
Type classification	BE
Defra / Area Smoke Control	✓
§15A.....	✓

CE approved
Defra approved

A

*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

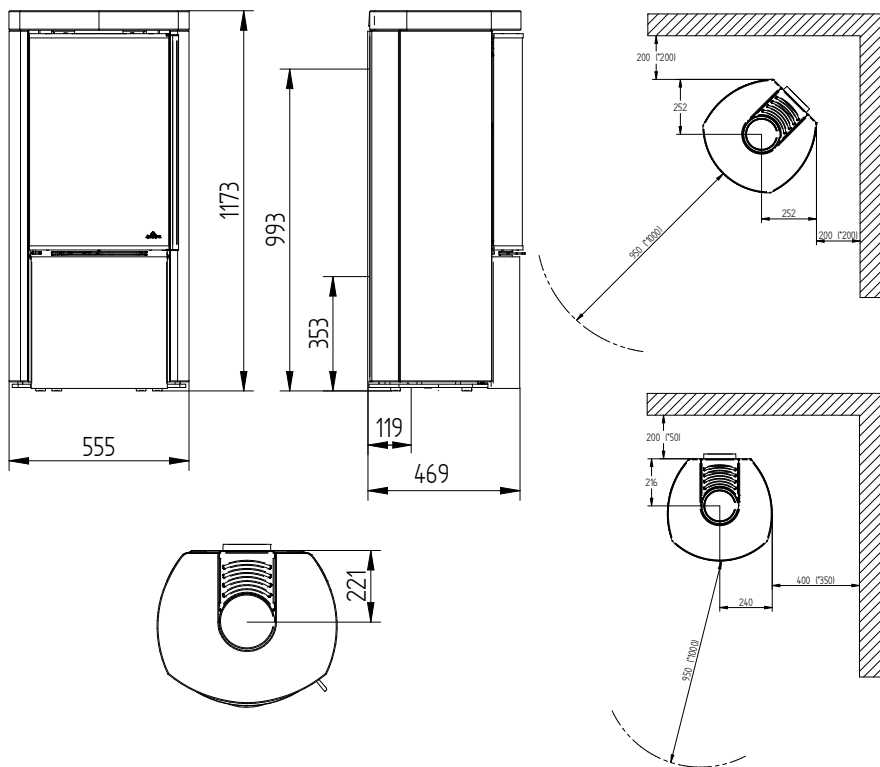

COZY CLASSIC

DARK SANDSTONE W/SIDE GLASS

COZY SERIES

Cleanest combustion
High efficiency
Strong convection
Timeless design

DuplicAir[®] for simpel and easy
air control
Cast iron door
Cast iron front
Self-closing door with magnets
Start-up function
Cast iron bottom
Cast iron top
Molded vermiculite
Self-cleaning window
Cold handle
5 year warranty

Can be purchased:

Customized floorplate out of 6 mm glass
Fresh air inlet ø 100 mm.



Find all models here
JYDEPEJSEN.COM




TECHNICAL DATA COZY CLASSIC DARK SANDSTONE W/SIDE GLASS

Min./max. output	3 - 8 kW
Mean CO-emission	704 mg/Nm ³
Recommended chimney draft	12 pa
Weight	282 kg
Smoke outlet	Ø 150 mm
Diameter of fresh air intake	Ø 100 mm - Optional
Combustion chamber	415 x 365 x 325 mm
Efficiency	79%
Flue gas mass flow	5,5 G/S
Flue gas temperature	352 °C
Particulate emission	10 mg/Nm ³
Type classification	BE
Defra / Area Smoke Control	✓
§15A.....	✓

CE approved
Defra approved

A

*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

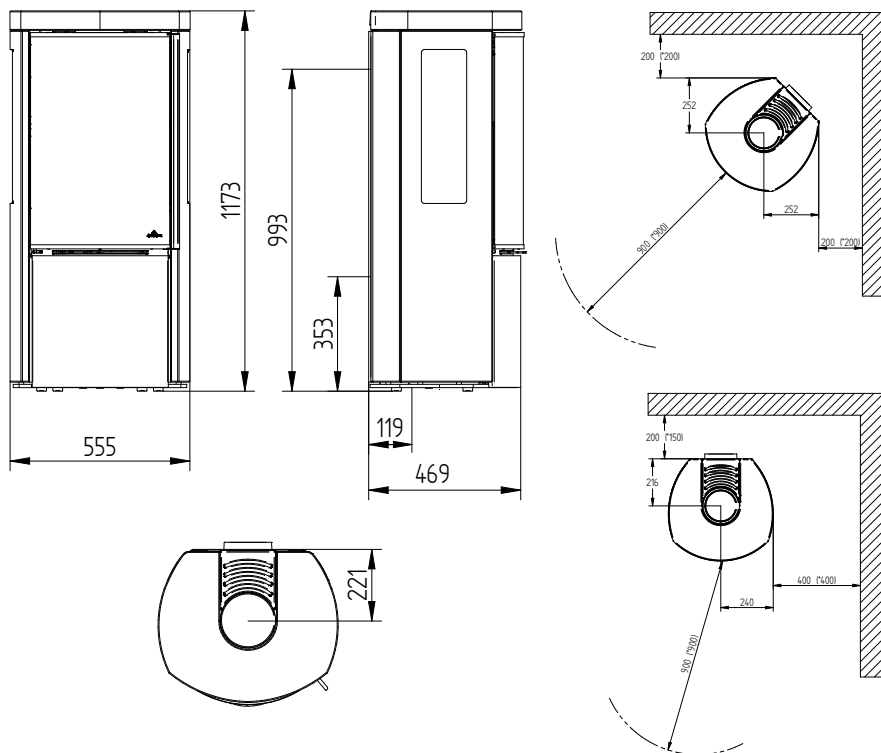

COZY CLASSIC

MOCA CREAM SANDSTONE

COZY SERIES

Cleanest combustion
High efficiency
Strong convection
Timeless design

DuplicAir[®] for simpel and easy
air control
Cast iron door
Cast iron front
Self-closing door with magnets
Start-up function
Cast iron bottom
Cast iron top
Molded vermiculite
Self-cleaning window
Cold handle
5 year warranty

Can be purchased:

Customized floorplate out of 6 mm glass
Fresh air inlet ø 100 mm.



Find all models here
JYDEPEJSEN.COM




TECHNICAL DATA COZY CLASSIC MOCA CREAM SANDSTONE

Min./max. output	3 - 8 kW
Mean CO-emission	704 mg/Nm ³
Recommended chimney draft	12 pa
Weight	313 kg
Smoke outlet	Ø 150 mm
Diameter of fresh air intake	Ø 100 mm - Optional
Combustion chamber	415 x 365 x 325 mm
Efficiency	79%
Flue gas mass flow	5,5 G/S
Flue gas temperature	352 °C
Particulate emission	10 mg/Nm ³
Type classification	BE
Defra / Area Smoke Control	✓
§15A.....	✓

CE approved
Defra approved

A

*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

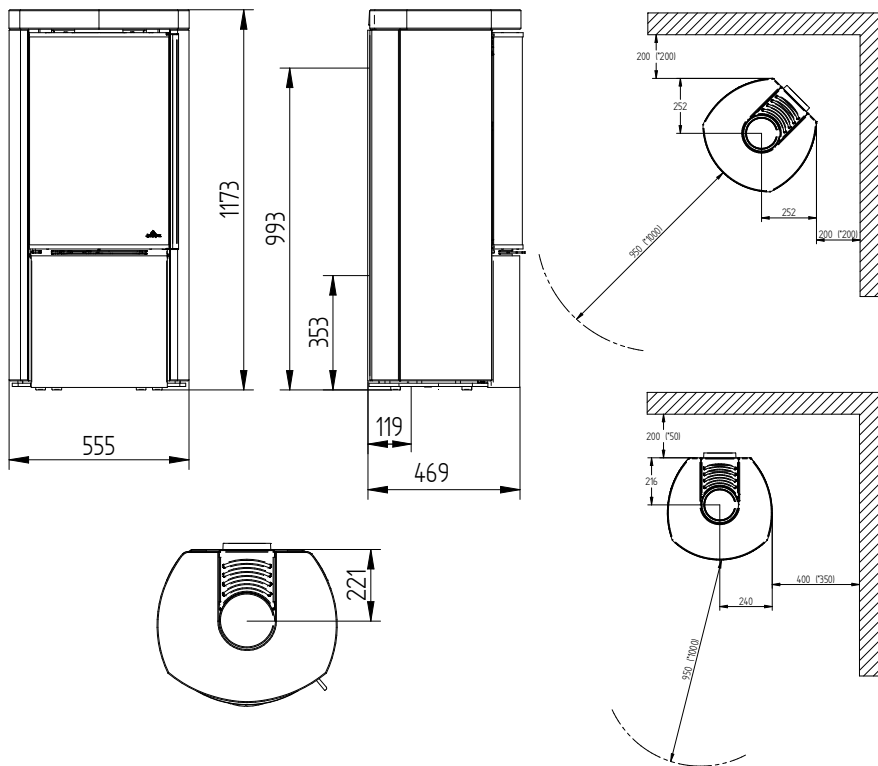

COZY CLASSIC

MOCA CREAM SANDSTONE W/SIDE GLASS

COZY SERIES

Cleanest combustion
High efficiency
Strong convection
Timeless design

DuplicAir® for simpel and easy
air control
Cast iron door
Cast iron front
Self-closing door with magnets
Start-up function
Cast iron bottom
Cast iron top
Molded vermiculite
Self-cleaning window
Cold handle
5 year warranty

Can be purchased:

Customized floorplate out of 6 mm glass
Fresh air inlet ø 100 mm.



Find all models here
JYDEPEJSEN.COM




TECHNICAL DATA COZY CLASSIC MOCA CREAM SANDSTONE W/SIDE GLASS

Min./max. output	3 - 8 kW
Mean CO-emission	704 mg/Nm ³
Recommended chimney draft	12 pa
Weight	282 kg
Smoke outlet	Ø 150 mm
Diameter of fresh air intake	Ø 100 mm - Optional
Combustion chamber	415 x 365 x 325 mm
Efficiency	79%
Flue gas mass flow	5,5 G/S
Flue gas temperature	352 °C
Particulate emission	10 mg/Nm ³
Type classification	BE
Defra / Area Smoke Control	✓
§15A.....	✓

CE approved
Defra approved

A

*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

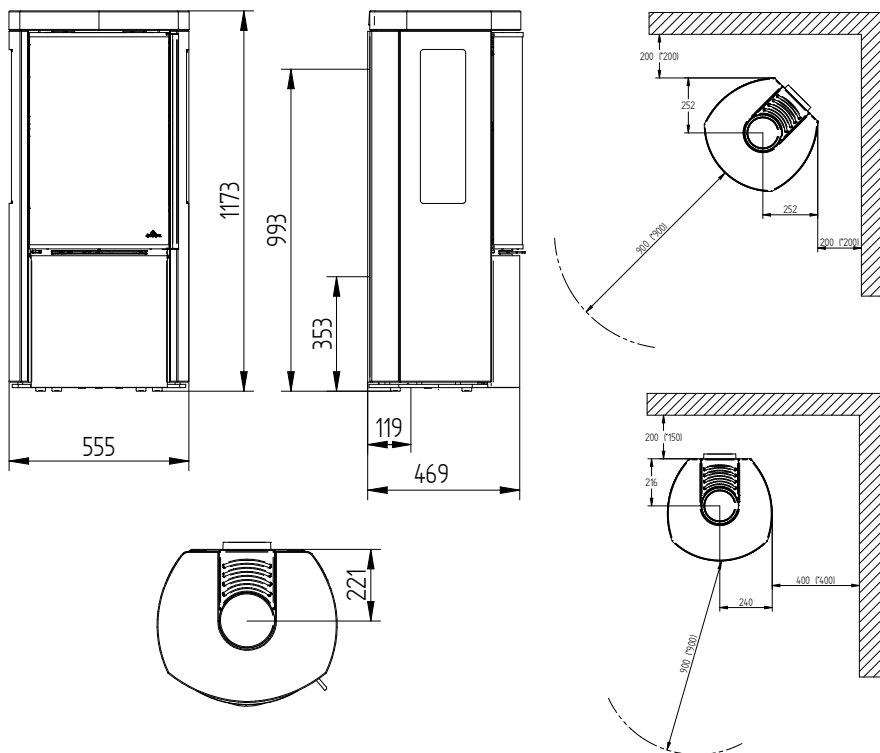

COZY MODERN

COZY SERIES

Cleanest combustion

High efficiency

Strong convection

Timeless design

DuplicAir® for simpel and easy

air control

Cast iron door

Cast iron front

Self-closing door with magnets

Start-up function

Cast iron bottom

Cast iron top

Molded vermiculite

Self-cleaning window

Cold handle

5 year warranty

Can be purchased:

Customized floorplate out of 6 mm glass

Fresh air inlet ø 100 mm.



Find all models here
JYDEPEJSEN.COM




TECHNICAL DATA COZY MODERN

Min./max. output	3 - 8 kW
Mean CO-emission	704 mg/Nm ³
Recommended chimney draft	12 pa
Weight	142 kg
Smoke outlet	Ø 150 mm
Diameter of fresh air intake	Ø 100 mm - Optional
Combustion chamber	415 x 365 x 325 mm
Efficiency	79%
Flue gas mass flow	5,5 G/S
Flue gas temperature	352 °C
Particulate emission	10 mg/Nm ³
Type classification	BE
Defra / Area Smoke Control	✓
§15A.....	✓

CE approved
Defra approved

A

*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

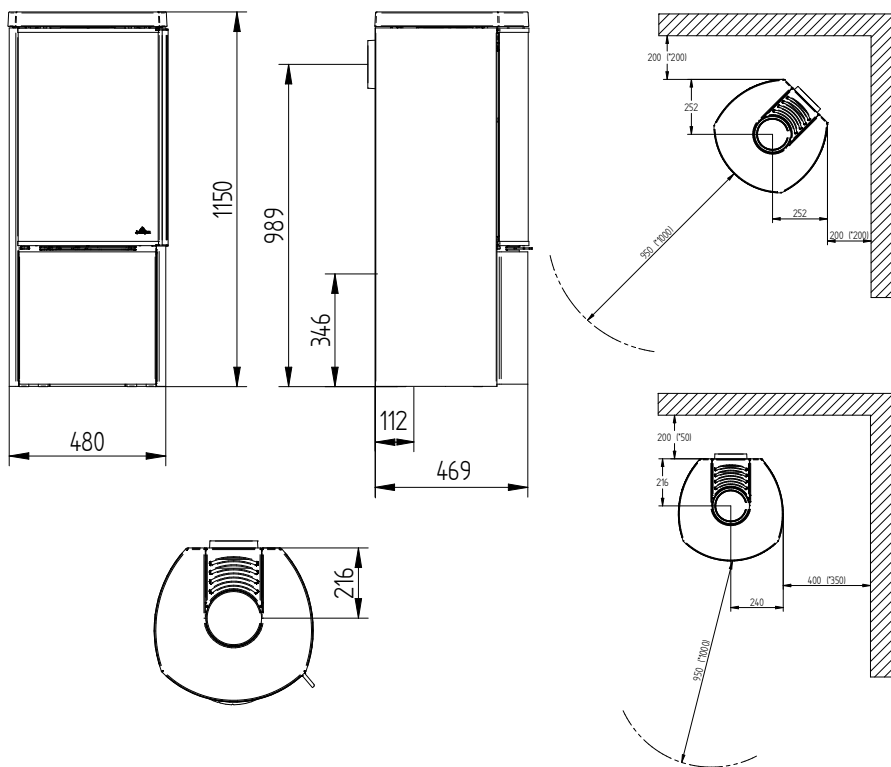

COZY MODERN

W/SIDE GLASS

COZY SERIES

Cleanest combustion
High efficiency
Strong convection
Timeless design

DuplicAir[®] for simpel and easy
air control
Cast iron door
Cast iron front
Self-closing door with magnets
Start-up function
Cast iron bottom
Cast iron top
Molded vermiculite
Self-cleaning window
Cold handle
5 year warranty

Can be purchased:

Customized floorplate out of 6 mm glass
Fresh air inlet ø 100 mm.



Find all models here
JYDEPEJSEN.COM




TECHNICAL DATA COZY MODERN W/SIDE GLASS

Min./max. output	3 - 8 kW
Mean CO-emission	704 mg/Nm ³
Recommended chimney draft	12 pa
Weight	140 kg
Smoke outlet	Ø 150 mm
Diameter of fresh air intake	Ø 100 mm - Optional
Combustion chamber	415 x 365 x 325 mm
Efficiency	79%
Flue gas mass flow	5,5 G/S
Flue gas temperature	352 °C
Particulate emission	10 mg/Nm ³
Type classification	BE
Defra / Area Smoke Control	✓
§15A.....	✓

CE approved
Defra approved

A

*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

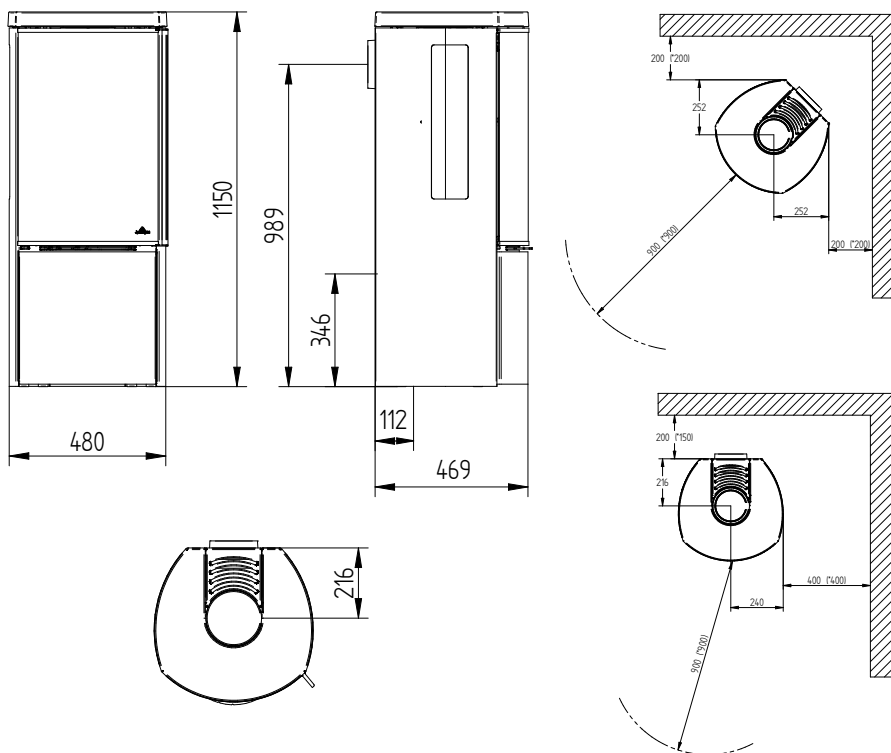

COZY MODERN

SOAPSTONE

COZY SERIES

Cleanest combustion
High efficiency
Strong convection
Timeless design

DuplicAir® for simpel and easy
air control
Cast iron door
Cast iron front
Self-closing door with magnets
Start-up function
Cast iron bottom
Cast iron top
Molded vermiculite
Self-cleaning window
Cold handle
5 year warranty

Can be purchased:

Customized floorplate out of 6 mm glass
Fresh air inlet ø 100 mm.



Find all models here
JYDEPEJSEN.COM




TECHNICAL DATA COZY MODERN SOAPSTONE

Min./max. output	3 - 8 kW
Mean CO-emission	704 mg/Nm ³
Recommended chimney draft	12 pa
Weight	313 kg
Smoke outlet	Ø 150 mm
Diameter of fresh air intake	Ø 100 mm - Optional
Combustion chamber	415 x 365 x 325 mm
Efficiency	79%
Flue gas mass flow	5,5 G/S
Flue gas temperature	352 °C
Particulate emission	10 mg/Nm ³
Type classification	BE
Defra / Area Smoke Control	✓
§15A.....	✓

CE approved
Defra approved

A

*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

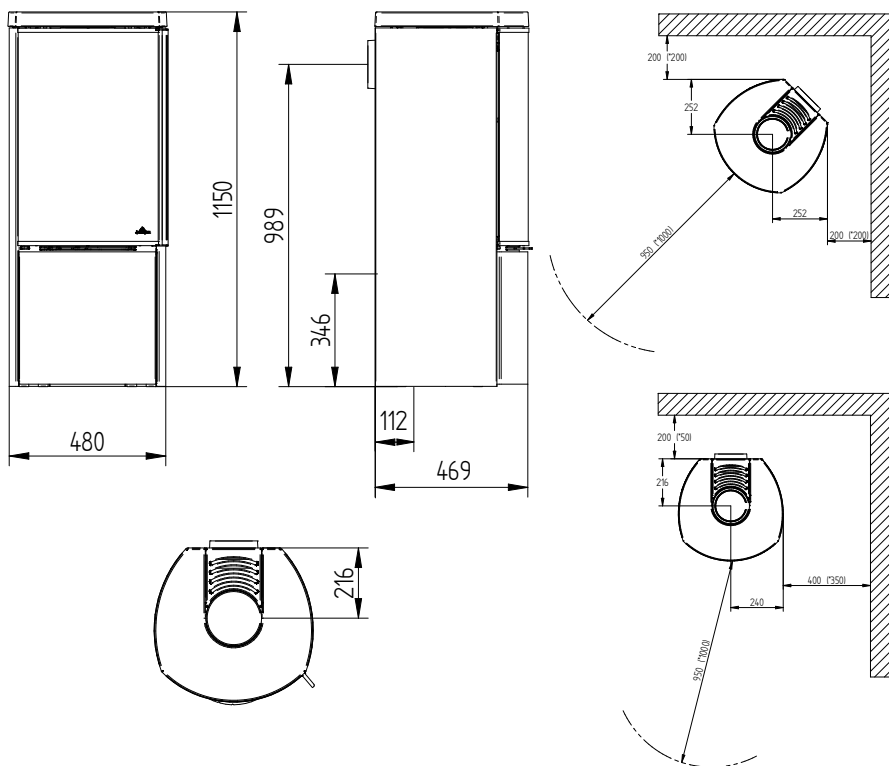

COZY MODERN

SOAPSTONE W/SIDE GLASS

COZY SERIES

Cleanest combustion
High efficiency
Strong convection
Timeless design

DuplicAir[®] for simpel and easy
air control
Cast iron door
Cast iron front
Self-closing door with magnets
Start-up function
Cast iron bottom
Cast iron top
Molded vermiculite
Self-cleaning window
Cold handle
5 year warranty

Can be purchased:

Customized floorplate out of 6 mm glass
Fresh air inlet ø 100 mm.



Find all models here
JYDEPEJSEN.COM






TECHNICAL DATA COZY MODERN SOAPSTONE W/SIDE GLASS

Min./max. output	3 - 8 kW
Mean CO-emission	704 mg/Nm ³
Recommended chimney draft	12 pa
Weight	313 kg
Smoke outlet	Ø 150 mm
Diameter of fresh air intake	Ø 100 mm - Optional
Combustion chamber	415 x 365 x 325 mm
Efficiency	79%
Flue gas mass flow	5,5 G/S
Flue gas temperature	352 °C
Particulate emission	10 mg/Nm ³
Type classification	BE
Defra / Area Smoke Control	✓
§15A.....	✓

CE approved
Defra approved

A

*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

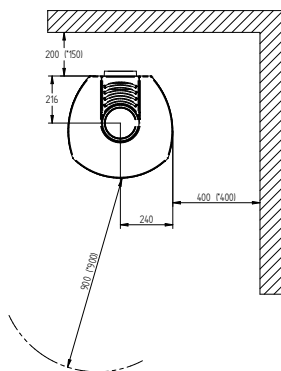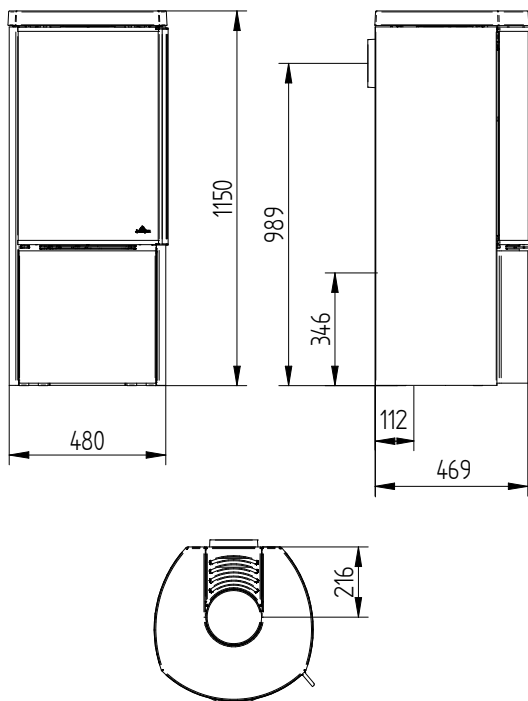

COZY MODERN

HIGH

COZY SERIES

Cleanest combustion
High efficiency
Strong convection
Timeless design

DuplicAir® for simpel and easy
air control
Cast iron door
Glass front
Self-closing door with magnets
Start-up function
Cast iron bottom
Molded vermiculite
Self-cleaning window
Cold handle
5 year warranty

Can be purchased:

Customized floorplate out of 6 mm glass
Fresh air inlet ø 100 mm.
Accumulation stone 45 kg.



Find all models here
JYDEPEJSEN.COM




TECHNICAL DATA COZY MODERN HIGH

Min./max. output	3 - 8 kW
Mean CO-emission	704 mg/Nm ³
Recommended chimney draft	12 pa
Weight	150 kg
Smoke outlet	Ø 150 mm
Diameter of fresh air intake	Ø 100 mm - Optional
Combustion chamber	415 x 365 x 325 mm
Efficiency	79%
Flue gas mass flow	5,5 G/S
Flue gas temperature	352 °C
Particulate emission	10 mg/Nm ³
Type classification	BE
Defra / Area Smoke Control	✓
§15A.....	✓

CE approved
Defra approved

A

*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

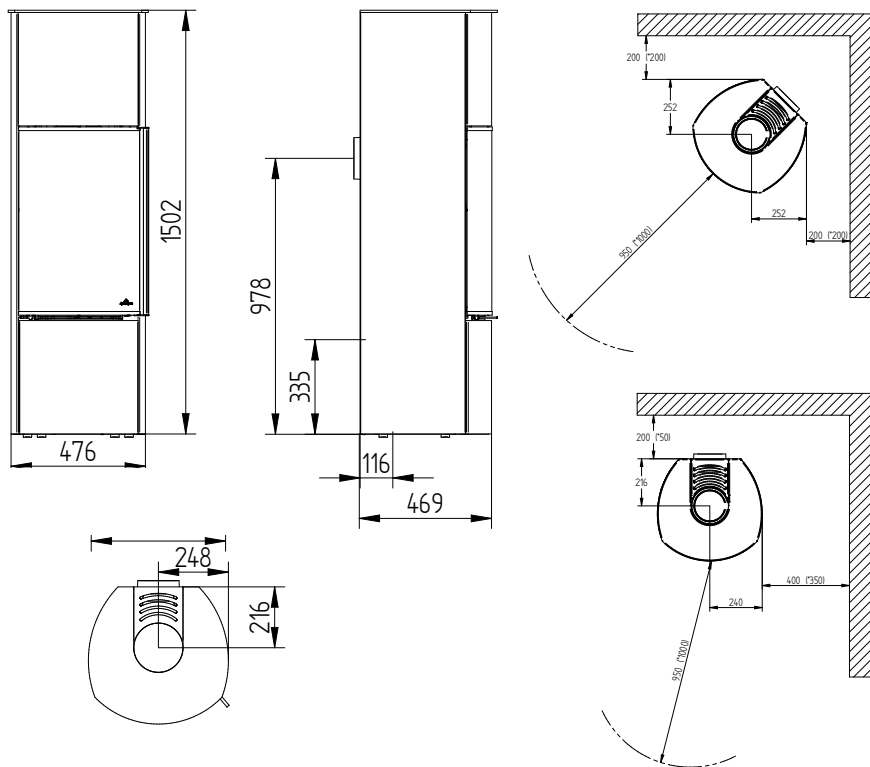

COZY MODERN

HIGH W/SIDE GLASS

COZY SERIES

Cleanest combustion
High efficiency
Strong convection
Timeless design

DuplicAir® for simpel and easy
air control
Cast iron door
Glass front
Self-closing door with magnets
Start-up function
Cast iron bottom
Molded vermiculite
Self-cleaning window
Cold handle
5 year warranty

Can be purchased:

Customized floorplate out of 6 mm glass
Fresh air inlet ø 100 mm.
Accumulation stone 45 kg.



Find all models here
JYDEPEJSEN.COM




TECHNICAL DATA COZY MODERN HIGH W/SIDE GLASS

Min./max. output	3 - 8 kW
Mean CO-emission	704 mg/Nm ³
Recommended chimney draft	12 pa
Weight	148 kg
Smoke outlet	Ø 150 mm
Diameter of fresh air intake	Ø 100 mm - Optional
Combustion chamber	415 x 365 x 325 mm
Efficiency	79%
Flue gas mass flow	5,5 G/S
Flue gas temperature	352 °C
Particulate emission	10 mg/Nm ³
Type classification	BE
Defra / Area Smoke Control	✓
§15A.....	✓

CE approved
Defra approved

A

*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

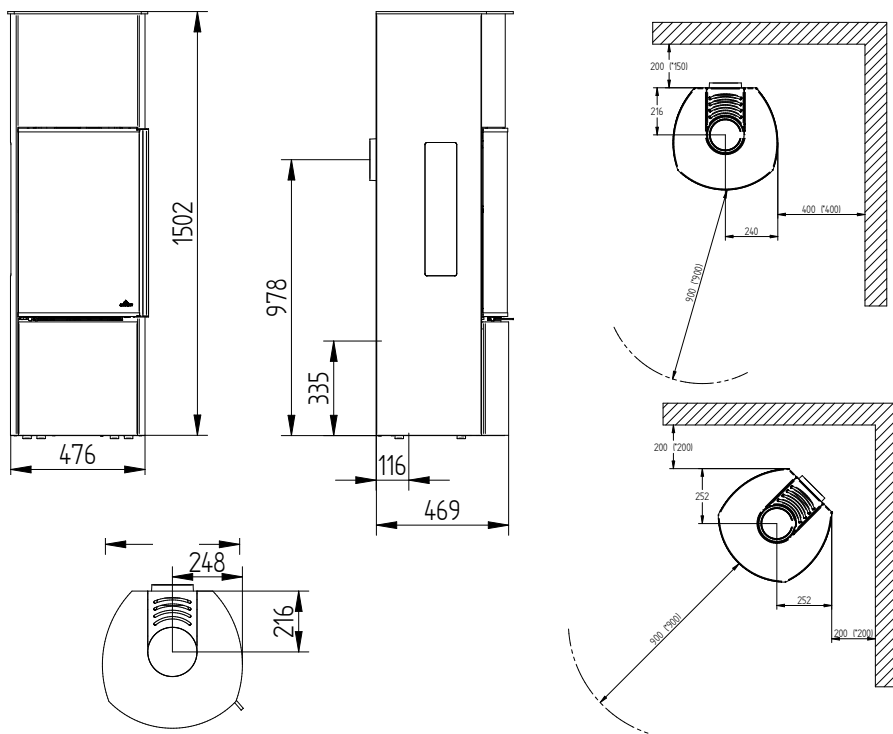

COZY MODERN

LOW

COZY SERIES

Cleanest combustion
High efficiency
Strong convection
Timeless design

DuplicAir® for simpel and easy
air control
Cast iron door
Cast iron front
Self-closing door with magnets
Start-up function
Cast iron bottom
Cast iron top
Molded vermiculite
Self-cleaning window
Cold handle
5 year warranty

Can be purchased:

Customized floorplate out of 6 mm glass
Fresh air inlet ø 100 mm.



Find all models here
JYDEPEJSEN.COM




TECHNICAL DATA COZY MODERN LOW

Min./max. output	3 - 8 kW
Mean CO-emission	704 mg/Nm ³
Recommended chimney draft	12 pa
Weight	131kg
Smoke outlet	Ø 150 mm
Diameter of fresh air intake	Ø 100 mm - Optional
Combustion chamber	415 x 365 x 325 mm
Efficiency	79%
Flue gas mass flow	5,5 G/S
Flue gas temperature	352 °C
Particulate emission	10 mg/Nm ³
Type classification	BE
Defra / Area Smoke Control	✓
§15A.....	✓

CE approved
Defra approved

A

*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

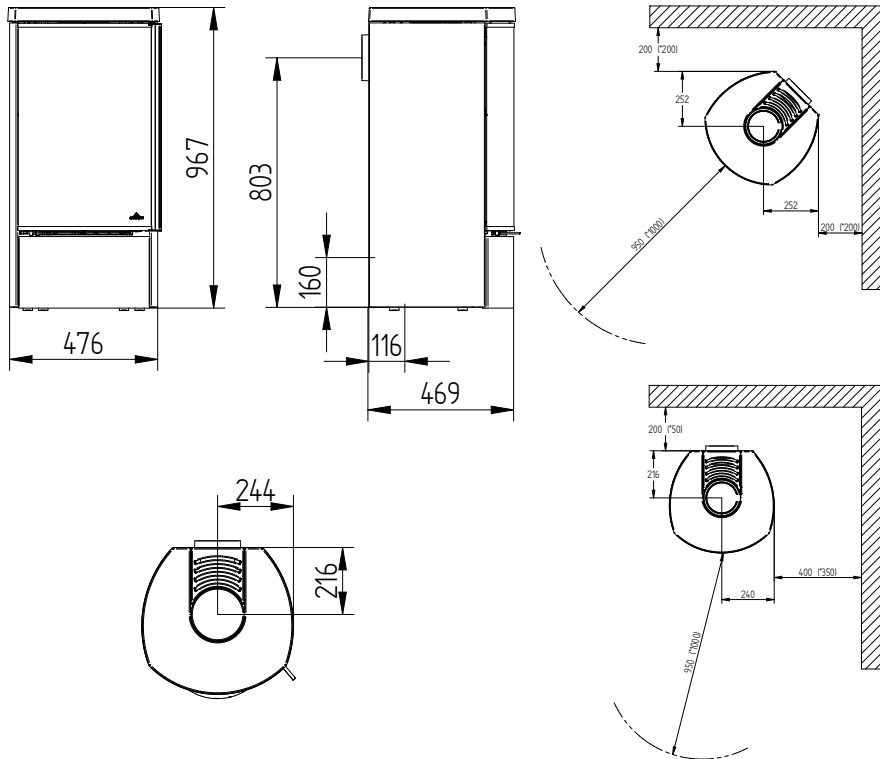

COZY MODERN

LOW W/SIDE GLASS

COZY SERIES

Cleanest combustion
High efficiency
Strong convection
Timeless design

DuplicAir[®] for simpel and easy
air control
Cast iron door
Cast iron front
Self-closing door with magnets
Start-up function
Cast iron bottom
Cast iron top
Molded vermiculite
Self-cleaning window
Cold handle
5 year warranty

Can be purchased:

Customized floorplate out of 6 mm glass
Fresh air inlet ø 100 mm.



Find all models here
JYDEPEJSEN.COM




TECHNICAL DATA COZY MODERN LOW W/SIDE GLASS

Min./max. output	3 - 8 kW
Mean CO-emission	704 mg/Nm ³
Recommended chimney draft	12 pa
Weight	129 kg
Smoke outlet	Ø 150 mm
Diameter of fresh air intake	Ø 100 mm - Optional
Combustion chamber	415 x 365 x 325 mm
Efficiency	79%
Flue gas mass flow	5,5 G/S
Flue gas temperature	352 °C
Particulate emission	10 mg/Nm ³
Type classification	BE
Defra / Area Smoke Control	✓
§15A.....	✓

CE approved
Defra approved

A

*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

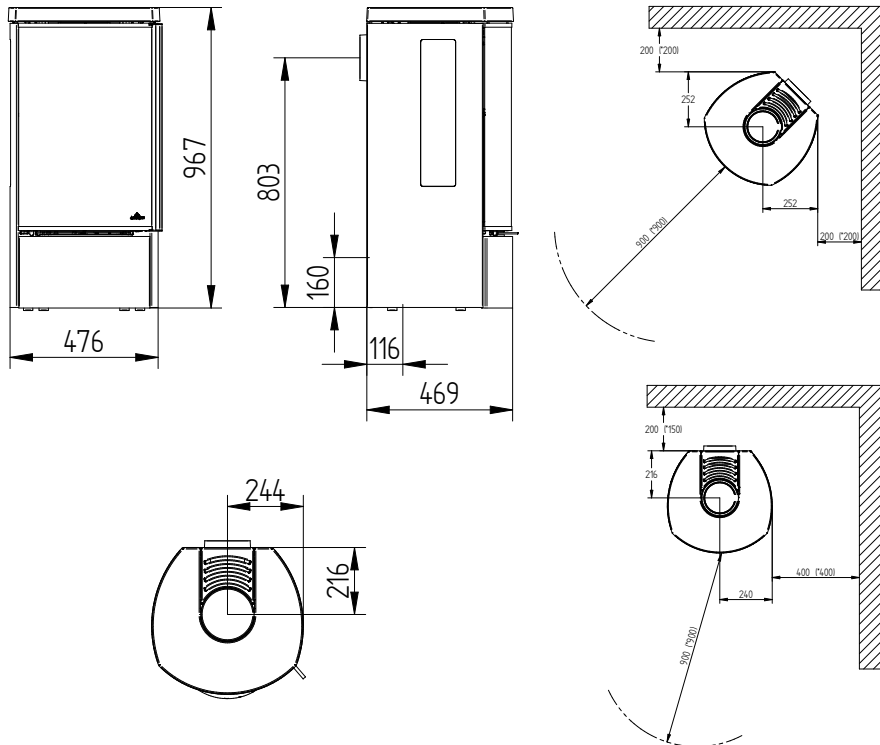

COZY MODERN

BASE

COZY SERIES

Cleanest combustion
High efficiency
Strong convection
Timeless design

DuplicAir® for simpel and easy
air control
Cast iron door
Cast iron front
Self-closing door with magnets
Start-up function
Cast iron bottom
Cast iron top
Molded vermiculite
Self-cleaning window
Cold handle
5 year warranty

Can be purchased:

Customized floorplate out of 6 mm glass
Fresh air inlet ø 100 mm.



Find all models here
JYDEPEJSEN.COM




TECHNICAL DATA COZY MODERN BASE

Min./max. output	3 - 8 kW
Mean CO-emission	704 mg/Nm ³
Recommended chimney draft	12 pa
Weight	140 kg
Smoke outlet	Ø 150 mm
Diameter of fresh air intake	Ø 100 mm - Optional
Combustion chamber	415 x 365 x 325 mm
Efficiency	79%
Flue gas mass flow	5,5 G/S
Flue gas temperature	352 °C
Particulate emission	10 mg/Nm ³
Type classification	BE
Defra / Area Smoke Control	✓
§15A.....	✓

CE approved
Defra approved

A

*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

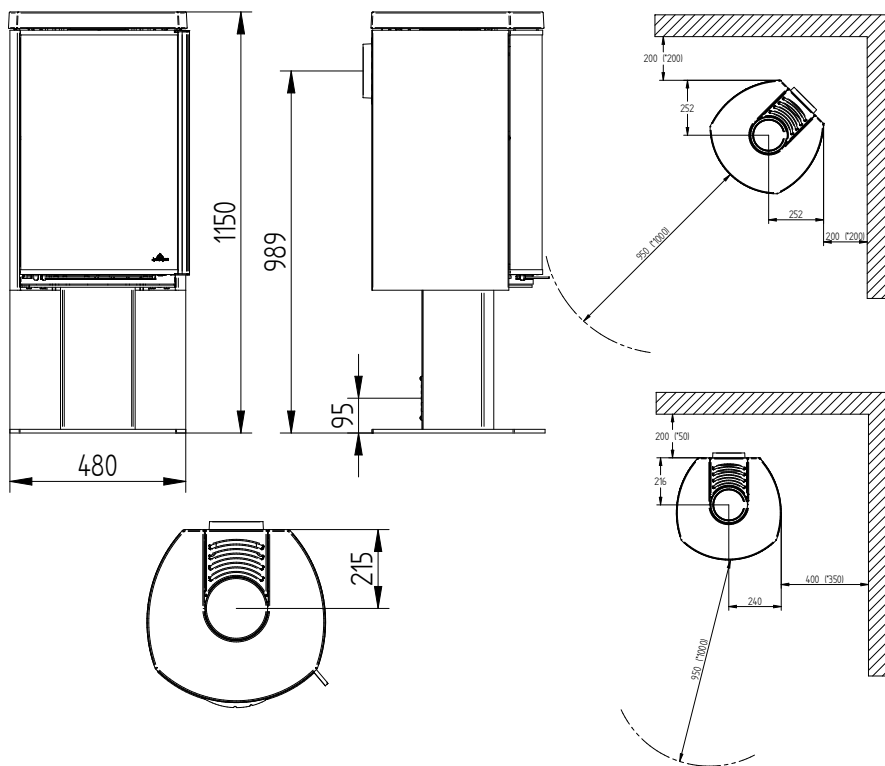

COZY MODERN

BASE W/SIDE GLASS

COZY SERIES

Cleanest combustion
High efficiency
Strong convection
Timeless design

DuplicAir® for simpel and easy
air control
Cast iron door
Cast iron front
Self-closing door with magnets
Start-up function
Cast iron bottom
Cast iron top
Molded vermiculite
Self-cleaning window
Cold handle
5 year warranty

Can be purchased:

Customized floorplate out of 6 mm glass
Fresh air inlet ø 100 mm.



Find all models here
JYDEPEJSEN.COM




TECHNICAL DATA COZY MODERN BASE W/SIDE GLASS

Min./max. output	3 - 8 kW
Mean CO-emission	704 mg/Nm ³
Recommended chimney draft	12 pa
Weight	140 kg
Smoke outlet	Ø 150 mm
Diameter of fresh air intake	Ø 100 mm - Optional
Combustion chamber	415 x 365 x 325 mm
Efficiency	79%
Flue gas mass flow	5,5 G/S
Flue gas temperature	352 °C
Particulate emission	10 mg/Nm ³
Type classification	BE
Defra / Area Smoke Control	✓
§15A.....	✓

CE approved
Defra approved

A

*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

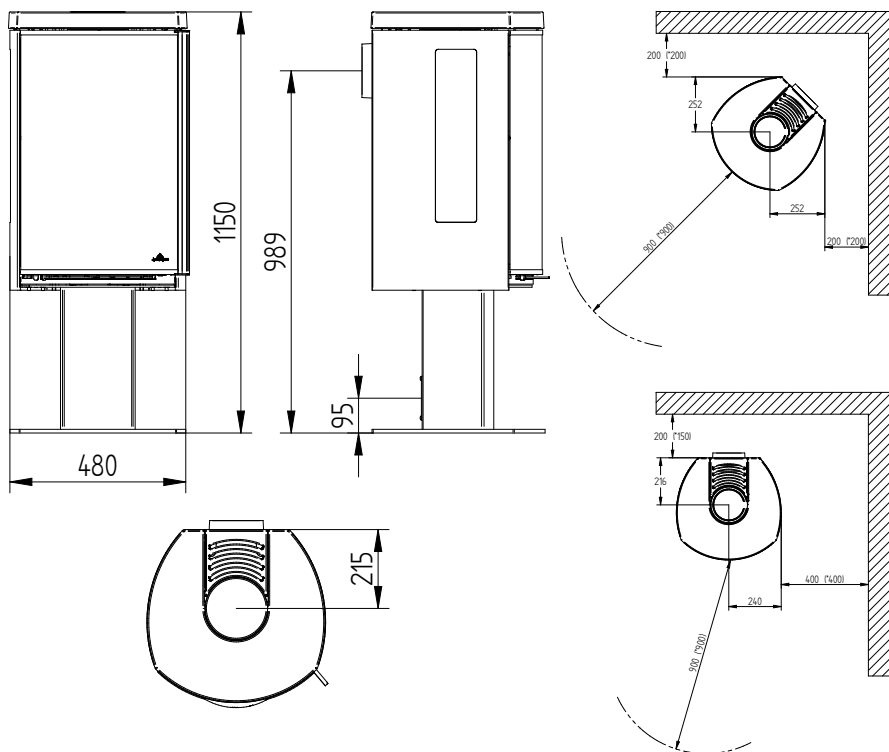

COZY MODERN

WALL

COZY SERIES

Cleanest combustion
High efficiency
Strong convection
Timeless design

DuplicAir[®] for simpel and easy
air control
Cast iron door
Cast iron front
Self-closing door with magnets
Start-up function
Cast iron bottom
Cast iron top
Molded vermiculite
Self-cleaning window
Cold handle
5 year warranty

Can be purchased:
Fresh air inlet ø 100 mm.



Find all models here
JYDEPEJSEN.COM


TECHNICAL DATA COZY MODERN WALL

Min./max. output	3 - 8 kW
Mean CO-emission	704 mg/Nm ³
Recommended chimney draft	12 pa
Weight	108 kg
Smoke outlet	Ø 150 mm
Diameter of fresh air intake	Ø 100 mm - Optional
Combustion chamber	415 x 365 x 325 mm
Efficiency	79%
Flue gas mass flow	5,5 G/S
Flue gas temperature	352 °C
Particulate emission	10 mg/Nm ³
Type classification	BE
Defra / Area Smoke Control	✓
§15A.....	✓

CE approved
Defra approved

A

*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

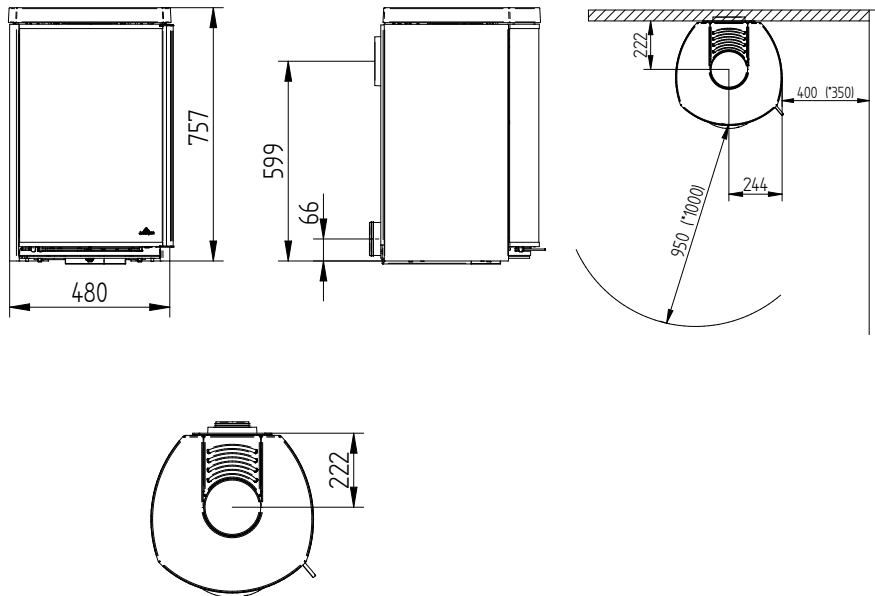

COZY MODERN

WALL W/SIDE GLASS

COZY SERIES

Cleanest combustion
High efficiency
Strong convection
Timeless design

DuplicAir[®] for simpel and easy
air control
Cast iron door
Cast iron front
Self-closing door with magnets
Start-up function
Cast iron bottom
Cast iron top
Molded vermiculite
Self-cleaning window
Cold handle
5 year warranty

Can be purchased:

Fresh air inlet ø 100 mm.



Find all models here
JYDEPEJSEN.COM


TECHNICAL DATA COZY MODERN WALL W/SIDE GLASS

Min./max. output	3 - 8 kW
Mean CO-emission	704 mg/Nm ³
Recommended chimney draft	12 pa
Weight	108 kg
Smoke outlet	Ø 150 mm
Diameter of fresh air intake	Ø 100 mm - Optional
Combustion chamber	415 x 365 x 325 mm
Efficiency	79%
Flue gas mass flow	5,5 G/S
Flue gas temperature	352 °C
Particulate emission	10 mg/Nm ³
Type classification	BE
Defra / Area Smoke Control	✓
§15A.....	✓

CE approved
Defra approved

A

*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

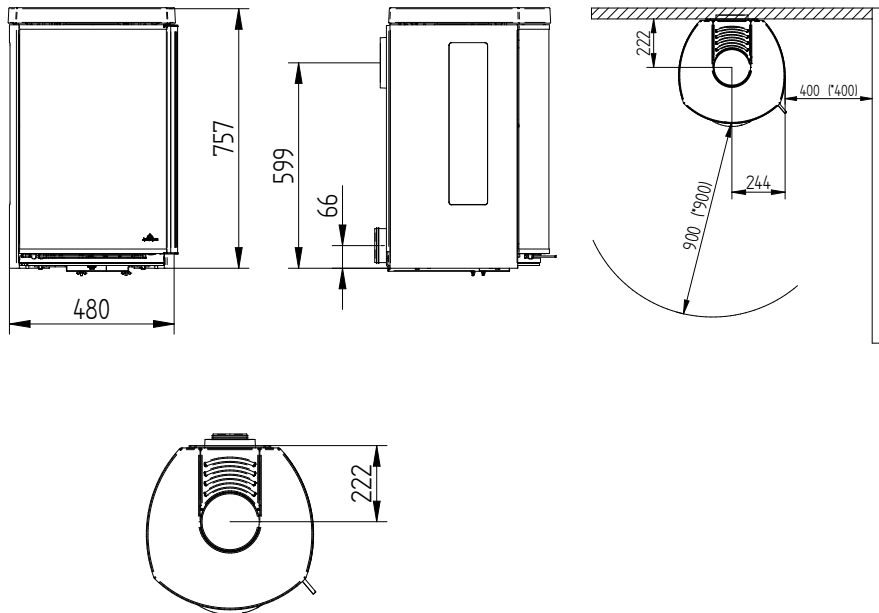

COZY MODERN

DARK SANDSTONE

COZY SERIES

Cleanest combustion
High efficiency
Strong convection
Timeless design

DuplicAir[®] for simpel and easy
air control
Cast iron door
Cast iron front
Self-closing door with magnets
Start-up function
Cast iron bottom
Cast iron top
Molded vermiculite
Self-cleaning window
Cold handle
5 year warranty

Can be purchased:

Customized floorplate out of 6 mm glass
Fresh air inlet ø 100 mm.



Find all models here
JYDEPEJSEN.COM




TECHNICAL DATA COZY MODERN DARK SANDSTONE

Min./max. output	3 - 8 kW
Mean CO-emission	704 mg/Nm ³
Recommended chimney draft	12 pa
Weight	313 kg
Smoke outlet	Ø 150 mm
Diameter of fresh air intake	Ø 100 mm - Optional
Combustion chamber	415 x 365 x 325 mm
Efficiency	79%
Flue gas mass flow	5,5 G/S
Flue gas temperature	352 °C
Particulate emission	10 mg/Nm ³
Type classification	BE
Defra / Area Smoke Control	✓
§15A.....	✓

CE approved
Defra approved

A

*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

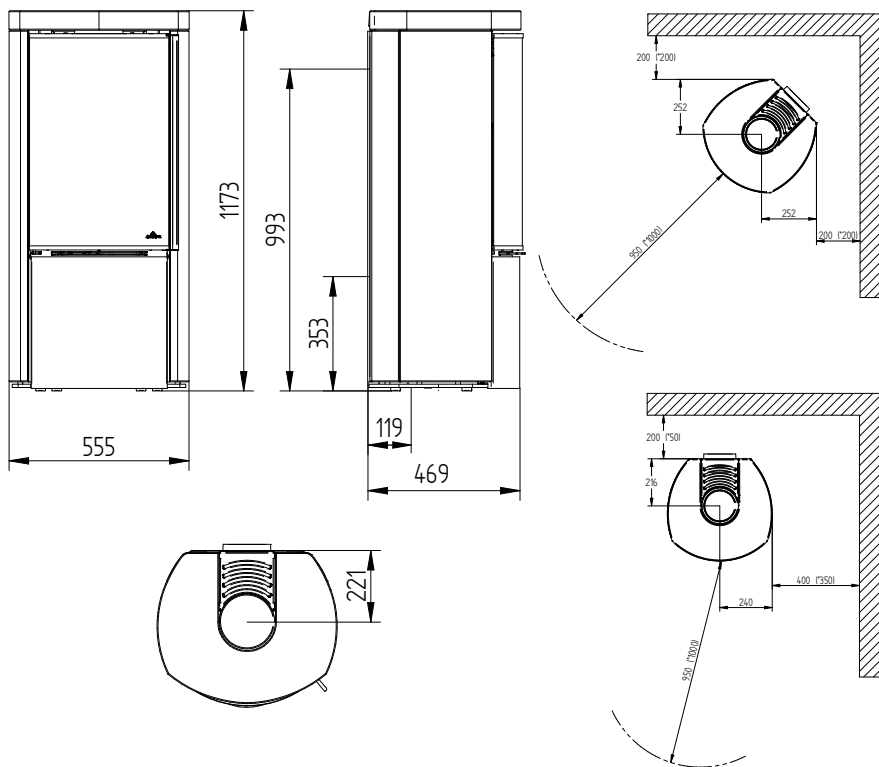

COZY MODERN

DARK SANDSTONE W/SIDE GLASS

COZY SERIES

Cleanest combustion
High efficiency
Strong convection
Timeless design

DuplicAir[®] for simpel and easy
air control
Cast iron door
Cast iron front
Self-closing door with magnets
Start-up function
Cast iron bottom
Cast iron top
Molded vermiculite
Self-cleaning window
Cold handle
5 year warranty

Can be purchased:

Customized floorplate out of 6 mm glass
Fresh air inlet ø 100 mm.



Find all models here
JYDEPEJSEN.COM




TECHNICAL DATA COZY MODERN DARK SANDSTONE W/SIDE GLASS

Min./max. output	3 - 8 kW
Mean CO-emission	704 mg/Nm ³
Recommended chimney draft	12 pa
Weight	282 kg
Smoke outlet	Ø 150 mm
Diameter of fresh air intake	Ø 100 mm - Optional
Combustion chamber	415 x 365 x 325 mm
Efficiency	79%
Flue gas mass flow	5,5 G/S
Flue gas temperature	352 °C
Particulate emission	10 mg/Nm ³
Type classification	BE
Defra / Area Smoke Control	✓
§15A.....	✓

CE approved
Defra approved

A

*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

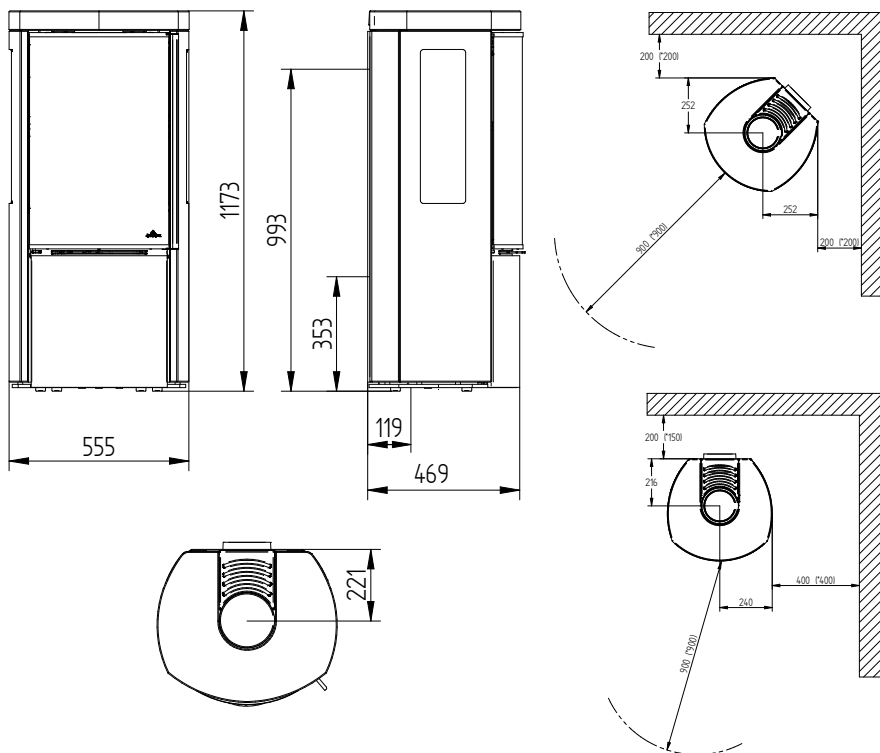

COZY MODERN

MOCA CREAM SANDSTONE

COZY SERIES

Cleanest combustion
High efficiency
Strong convection
Timeless design

DuplicAir[®] for simpel and easy
air control
Cast iron door
Cast iron front
Self-closing door with magnets
Start-up function
Cast iron bottom
Cast iron top
Molded vermiculite
Self-cleaning window
Cold handle
5 year warranty

Can be purchased:

Customized floorplate out of 6 mm glass
Fresh air inlet ø 100 mm.



Find all models here
JYDEPEJSEN.COM




TECHNICAL DATA COZY MODERN MOCA CREAM SANDSTONE

Min./max. output	3 - 8 kW
Mean CO-emission	704 mg/Nm ³
Recommended chimney draft	12 pa
Weight	313 kg
Smoke outlet	Ø 150 mm
Diameter of fresh air intake	Ø 100 mm - Optional
Combustion chamber	415 x 365 x 325 mm
Efficiency	79%
Flue gas mass flow	5,5 G/S
Flue gas temperature	352 °C
Particulate emission	10 mg/Nm ³
Type classification	BE
Defra / Area Smoke Control	✓
§15A.....	✓

CE approved
Defra approved

A

*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

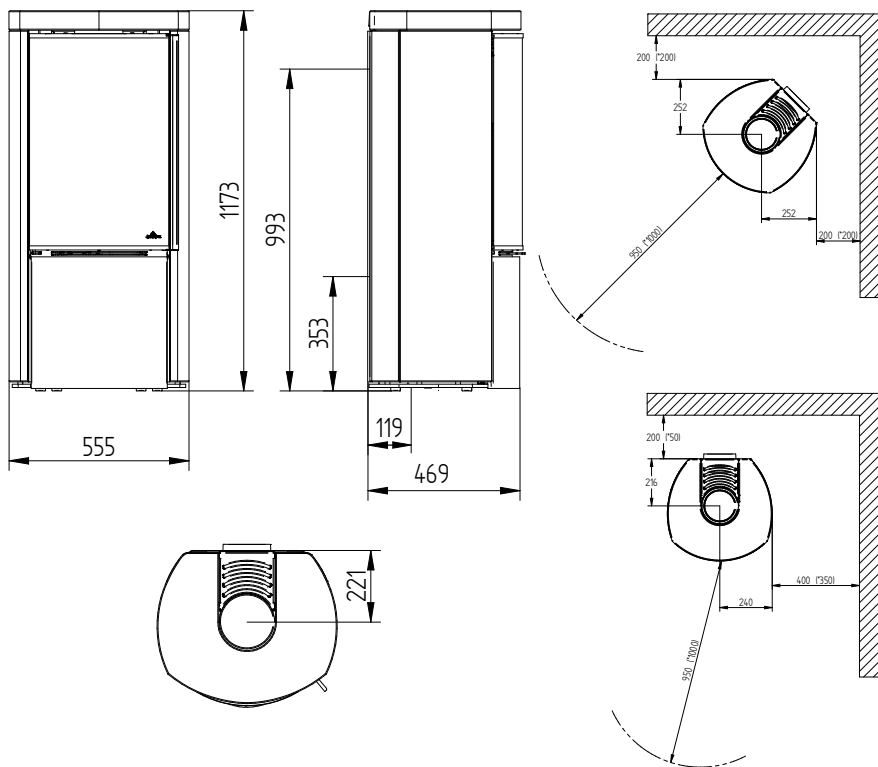

COZY MODERN

MOCA CREAM SANDSTONE W/SIDE GLASS

COZY SERIES

Cleanest combustion
High efficiency
Strong convection
Timeless design

DuplicAir[®] for simpel and easy
air control
Cast iron door
Cast iron front
Self-closing door with magnets
Start-up function
Cast iron bottom
Cast iron top
Molded vermiculite
Self-cleaning window
Cold handle
5 year warranty

Can be purchased:

Customized floorplate out of 6 mm glass
Fresh air inlet ø 100 mm.



Find all models here
JYDEPEJSEN.COM



TECHNICAL DATA COZY MODERN MOCA CREAM SANDSTONE W/SIDE GLASS

Min./max. output	3 - 8 kW
Mean CO-emission	704 mg/Nm ³
Recommended chimney draft	12 pa
Weight	282 kg
Smoke outlet	Ø 150 mm
Diameter of fresh air intake	Ø 100 mm - Optional
Combustion chamber	415 x 365 x 325 mm
Efficiency	79%
Flue gas mass flow	5,5 G/S
Flue gas temperature	352 °C
Particulate emission	10 mg/Nm ³
Type classification	BE
Defra / Area Smoke Control	✓
§15A.....	✓

CE approved
Defra approved

A

*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

