

CUBIC 109

CUBIC SERIES

DESIGNED BY
ANDERS NØRGAARD

Cleanest combustion
High efficiency
Strong convection
Timeless design

DuplicAir[®] for simpel and easy air control
Self-closing door
Wood compartment door
Cast iron bottom
Molded vermiculite
Self-cleaning window
5 year warranty

Can be purchased:
Fresh air inlet ø 100 mm.



Find all models here
JYDEPEJSEN.COM


TECHNICAL DATA CUBIC 109

Min./max. output	3 - 8 kW
Mean CO-emission	704 mg/Nm ³
Recommended chimney draft	12 pa
Weight	134 kg
Smoke outlet	Ø 150 mm
Diameter of fresh air intake	Ø 100 mm - Optional
Combustion chamber	415 x 365 x 325 mm
Efficiency	79%
Flue gas mass flow	5,5 G/S
Flue gas temperature	352 °C
Particulate emission	10 mg/Nm ³
Type classification	BE
Defra / Area Smoke Control	✓
§15A.....	✓

CE approved
Defra approved

A

*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

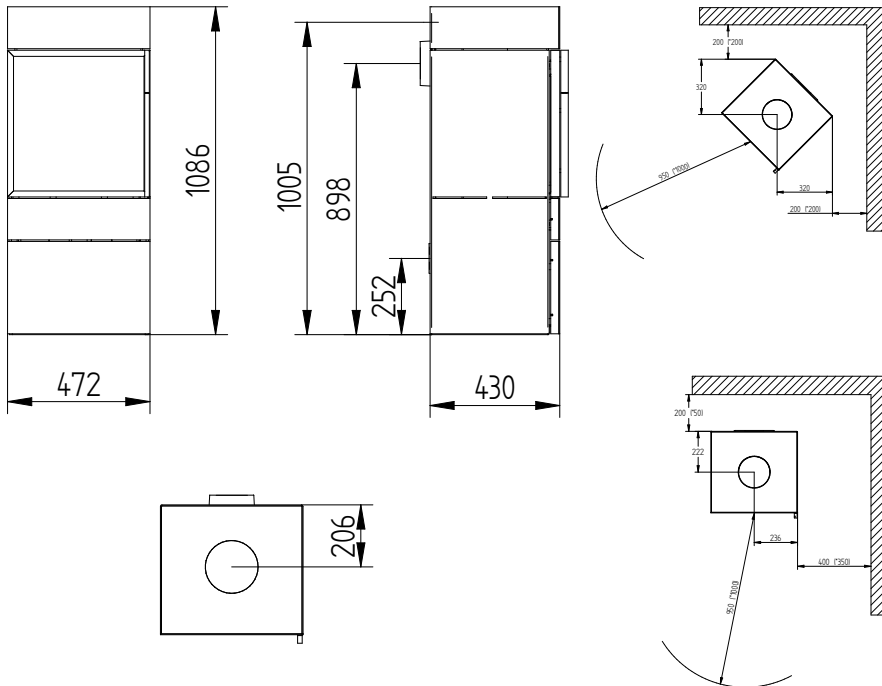

CUBIC 166

CUBIC SERIES

DESIGNED BY
ANDERS NØRGAARD

Cleanest combustion
High efficiency
Strong convection
Timeless design

DuplicAir® for simpel and easy air control
Self-closing door
Wood compartment door
Cast iron bottom
Molded vermiculite
Self-cleaning window
5 year warranty

Can be purchased:
Fresh air inlet ø 100 mm.



Find all models here
JYDEPEJSEN.COM





TECHNICAL DATA CUBIC 166

Min./max. output	3 - 8 kW
Mean CO-emission	704 mg/Nm ³
Recommended chimney draft	12 pa
Weight	179 kg
Smoke outlet	Ø 150 mm
Diameter of fresh air intake	Ø 100 mm - Optional
Combustion chamber	415 x 365 x 325 mm
Efficiency	79%
Flue gas mass flow	5,5 G/S
Flue gas temperature	352 °C
Particulate emission	10 mg/Nm ³
Type classification	BE
Defra / Area Smoke Control	✓
§15A.....	✓

CE approved
Defra approved

A

*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

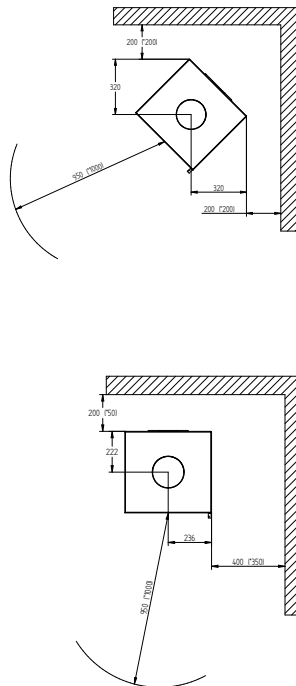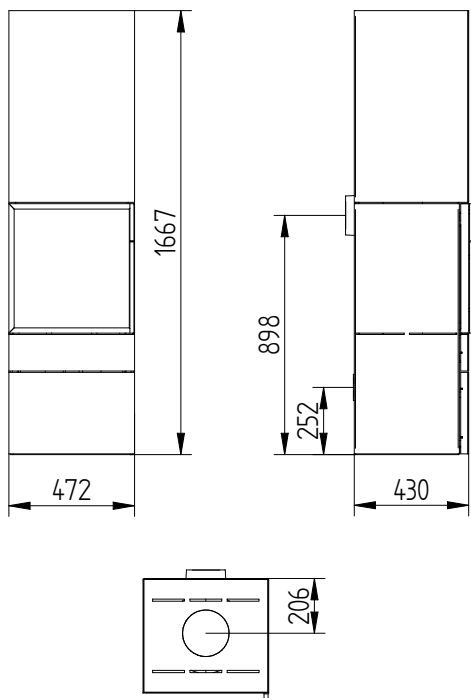

CUBIC 215

CUBIC SERIES

DESIGNED BY
ANDERS NØRGAARD

Cleanest combustion
High efficiency
Strong convection
Timeless design

DuplicAir® for simpel and easy air control
Self-closing door
Wood compartment door
Cast iron bottom
Molded vermiculite
Self-cleaning window
5 year warranty

Can be purchased:
Fresh air inlet ø 100 mm.



Find all models here
JYDEPEJSEN.COM




TECHNICAL DATA CUBIC 215

Min./max. output	3 - 8 kW
Mean CO-emission	704 mg/Nm ³
Recommended chimney draft	12 pa
Weight	199 kg
Smoke outlet	Ø 150 mm
Diameter of fresh air intake	Ø 100 mm - Optional
Combustion chamber	415 x 365 x 325 mm
Efficiency	79%
Flue gas mass flow	5,5 G/S
Flue gas temperature	352 °C
Particulate emission	10 mg/Nm ³
Type classification	BE
Defra / Area Smoke Control	✓
§15A.....	✓

CE approved
Defra approved
DIBT approved

A

*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

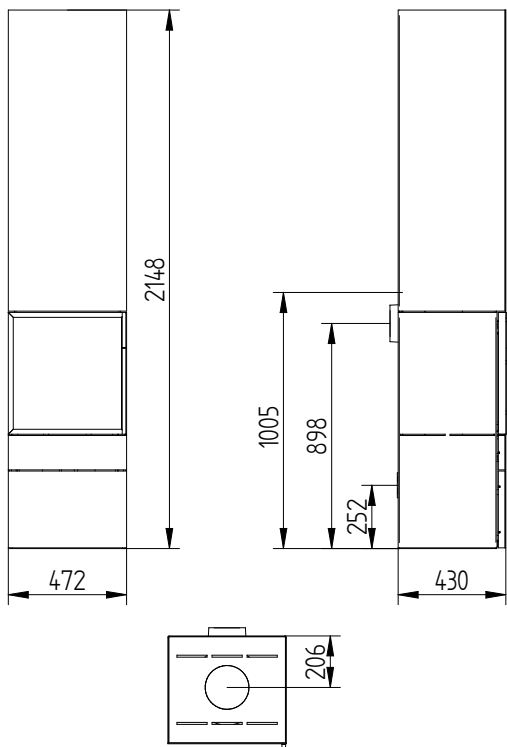

CUBIC WALL

CUBIC SERIES

DESIGNED BY
ANDERS NØRGAARD

Cleanest combustion
High efficiency
Strong convection
Timeless design

DuplicAir[®] for simpel and easy air control
Self-closing door
Wood compartment door
Cast iron bottom
Molded vermiculite
Self-cleaning window
5 year warranty

Can be purchased:
Fresh air inlet ø 100 mm.



Find all models here
JYDEPEJSEN.COM

TECHNICAL DATA CUBIC WALL

Min./max. output	3 - 8 kW
Mean CO-emission	704 mg/Nm ³
Recommended chimney draft	12 pa
Weight	113 kg
Smoke outlet	Ø 150 mm
Diameter of fresh air intake	Ø 100 mm - Optional
Combustion chamber	415 x 365 x 325 mm
Efficiency	79%
Flue gas mass flow	5,5 G/S
Flue gas temperature	352 °C
Particulate emission	10 mg/Nm ³
Type classification	BE
Defra / Area Smoke Control	✓
§15A.....	✓

CE approved
Defra approved
DIBt approved

A

*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

