

JYDEPEJS H530

CLASSIC

JYDEPEJS H530 SERIEN

Build in the heat
High efficiency
Strong convection
Timeless design

DuplicAir® for simpel and easy
air control
Suitable for installation in an open
fireplace
Individually customizable frame,
with or without return edge
With or without complete glass front
Right- or left-hinged door
Cool-touch handle
Space for large firewood logs
Molded vermiculite
Self-cleaning window
Start-up function
Cold handle
5 year warranty

Can be purchased

Special frame with/without return edge
Fresh air intake Ø 100 mm




Find all models here
JYDEPEJSEN.COM

TECHNICAL DATA JYDEPEJS H530 CLASSIC

Min./max. output	4 - 9 kW
Mean CO-emission	1072 mg/Nm ³
Recommended chimney draft	12 pa
Weight	91 kg
Smoke outlet	Ø 150 mm
Diameter of fresh air intake	Ø 100 mm
Combustion chamber	350 x 600 x 300 mm
Efficiency	75%
Flue gas mass flow	7,8 G/S
Flue gas temperature	415 °C
Dust emission	37 mg/Nm ³
Type classification	BE
Min. installation dimensions	B 714 x H 544

CE approved

A

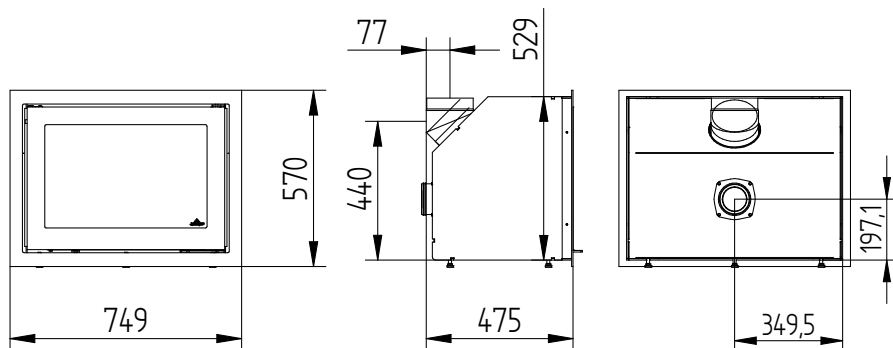

JYDEPEJS H530

MODERN

JYDEPEJS H530 SERIEN

Build in the heat
High efficiency
Strong convection
Timeless design

DuplicAir® for simpel and easy
air control
Suitable for installation in an open
fireplace
Individually customizable frame,
with or without return edge
With or without complete glass front
Right- or left-hinged door
Cool-touch handle
Space for large firewood logs
Molded vermiculite
Self-cleaning window
Start-up function
Cold handle
5 year warranty

Can be purchased

Special frame with/without return edge
Fresh air intake Ø 100 mm



Find all models here
JYDEPEJSEN.COM

TECHNICAL DATA JYDEPEJS H530 MODERN

Min./max. output	4 - 9 kW
Mean CO-emission	1072 mg/Nm ³
Recommended chimney draft	12 pa
Weight	91 kg
Smoke outlet	Ø 150 mm
Diameter of fresh air intake	Ø 100 mm
Combustion chamber	350 x 600 x 300 mm
Efficiency	75%
Flue gas mass flow	7,8 G/S
Flue gas temperature	415 °C
Dust emission	37 mg/Nm ³
Type classification	BE
Min. installation dimensions	B 714 x H 544

CE approved

A

