

# OMEGA BASIC

## OMEGA SERIES

---

Clean combustion  
High efficiency  
Strong convection  
Timeless design

DuplicAir® for simpel and easy  
air control  
Complete glass door with black frame  
180° flame visibility  
Self-closing door with magnets  
All round  
Start-up function  
Wood compartment door  
Fresh air inlet included  
Cast iron bottom  
Molded vermiculite  
Self-cleaning window  
Cold handle  
5 year warranty

### Can be purchased

Soft Close System (with pump)  
Rotating base  
Customized floorplate out of 6 mm glass



---

Find all models here  
**JYDEPEJSEN.COM**



## TECHNICAL DATA OMEGA BASIC

|                                    |                         |
|------------------------------------|-------------------------|
| Min./max. output .....             | 3 - 8 kW                |
| Mean CO-emission .....             | 1216 mg/Nm <sup>3</sup> |
| Recommended chimney draft .....    | 12 pa                   |
| Weight .....                       | 144 kg                  |
| Smoke outlet .....                 | Ø 150 mm                |
| Diameter of fresh air intake ..... | Ø 100 mm                |
| Combustion chamber .....           | 412 x 368 x 407 mm      |
| Efficiency .....                   | 79%                     |
| Flue gas mass flow .....           | 6,5 G/S                 |
| Flue gas temperature .....         | 366 °C                  |
| Dust emission .....                | 15 mg/Nm <sup>3</sup>   |
| Type classification .....          | CA                      |
| Defra / Area Smoke Control .....   | ✓                       |
| §15A.....                          | ✓                       |

CE approved  
Defra approved

**A**

\*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

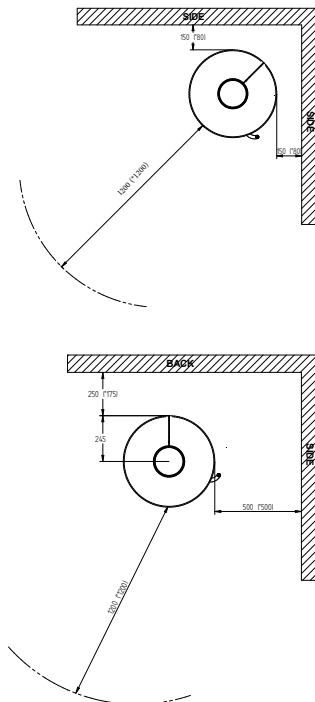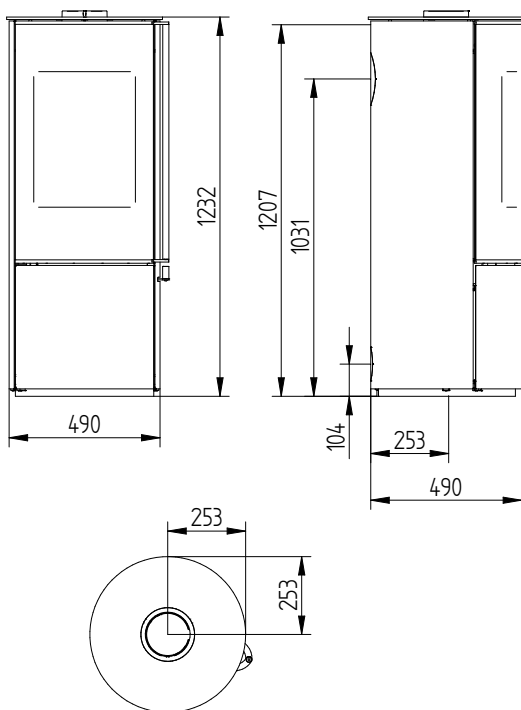

# OMEGA HIGH

## OMEGA SERIES

---

Clean combustion  
High efficiency  
Strong convection  
Timeless Design

DuplicAir® for simpel and easy  
air control  
Complete glass door with black frame  
180° flame visibility  
Self-closing door with magnets  
All round  
Start-up function  
Wood compartment door  
Fresh air inlet included  
Cast iron bottom  
Molded vermiculite  
Self-cleaning window  
Cold handle  
5 year warranty

### Can be purchased

Soft Close System (with pump)  
Rotating base  
Customized floorplate out of 6 mm glass



---

Find all models here  
**JYDEPEJSEN.COM**




## TECHNICAL DATA OMEGA HIGH

|                                    |                         |
|------------------------------------|-------------------------|
| Min./max. output .....             | 3 - 8 kW                |
| Mean CO-emission .....             | 1216 mg/Nm <sup>3</sup> |
| Recommended chimney draft .....    | 12 pa                   |
| Weight .....                       | 155 kg                  |
| Smoke outlet .....                 | Ø 150 mm                |
| Diameter of fresh air intake ..... | Ø 100 mm                |
| Combustion chamber .....           | 412 x 368 x 407 mm      |
| Efficiency .....                   | 79%                     |
| Flue gas mass flow .....           | 6,5 G/S                 |
| Flue gas temperature .....         | 366 °C                  |
| Dust emission .....                | 15 mg/Nm <sup>3</sup>   |
| Type classification .....          | CA                      |
| Defra / Area Smoke Control .....   | ✓                       |
| §15A.....                          | ✓                       |

CE approved  
Defra approved

**A**

\*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

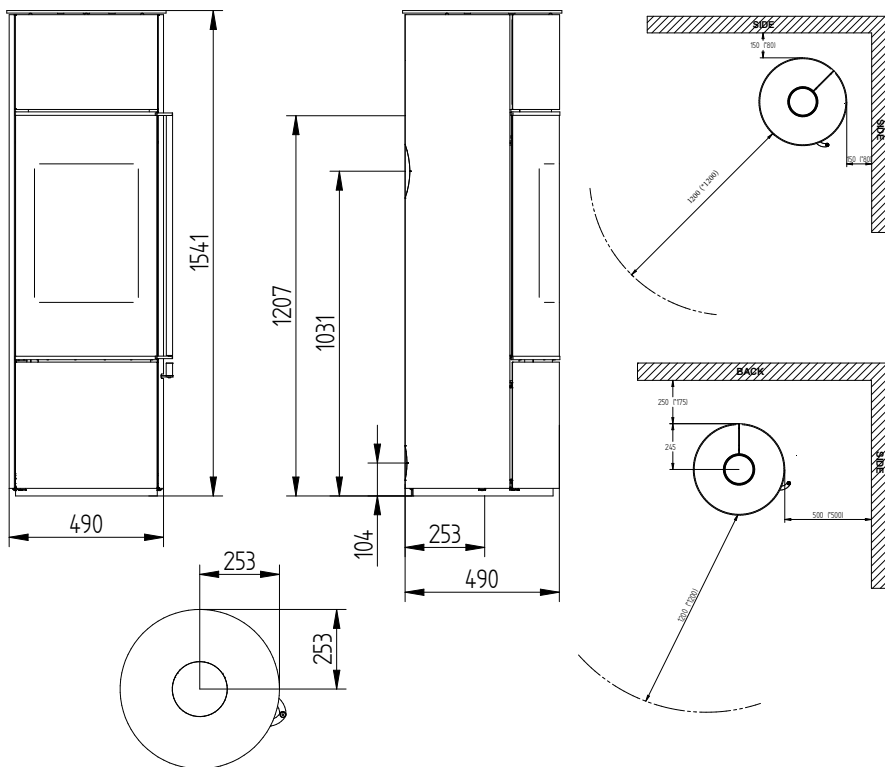

# OMEGA CORE

## OMEGA SERIES

---

Clean combustion  
High efficiency  
Strong convection  
Timeless design

DuplicAir<sup>®</sup> for simpel and easy  
air control  
Complete glass door with black frame  
180° flame visibility  
Self-closing door with magnets  
All round  
Start-up function  
Wood compartment door  
Fresh air inlet included  
Cast iron bottom  
Accumulation stones included (54 kg.)  
Molded vermiculite  
Self-cleaning window  
Cold handle  
5 year warranty

### **Can be purchased**

Soft Close System (with pump)  
Rotating base  
Customized floorplate out of 6 mm glass



---

Find all models here  
**JYDEPEJSEN.COM**


## TECHNICAL DATA OMEGA CORE

|                                    |                         |
|------------------------------------|-------------------------|
| Min./max. output .....             | 3 - 8 kW                |
| Mean CO-emission .....             | 1216 mg/Nm <sup>3</sup> |
| Recommended chimney draft .....    | 12 pa                   |
| Weight .....                       | 214 kg                  |
| Smoke outlet .....                 | Ø 150 mm                |
| Accumulation stone .....           | 45 kg. - Optional       |
| Diameter of fresh air intake ..... | Ø 100 mm                |
| Combustion chamber .....           | 412 x 368 x 407 mm      |
| Efficiency .....                   | 79%                     |
| Flue gas mass flow .....           | 6,5 G/S                 |
| Flue gas temperature .....         | 366 °C                  |
| Dust emission .....                | 15 mg/Nm <sup>3</sup>   |
| Type classification .....          | CA                      |
| Defra / Area Smoke Control .....   | ✓                       |
| §15A.....                          | ✓                       |

CE approved  
Defra approved

**A**

\*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

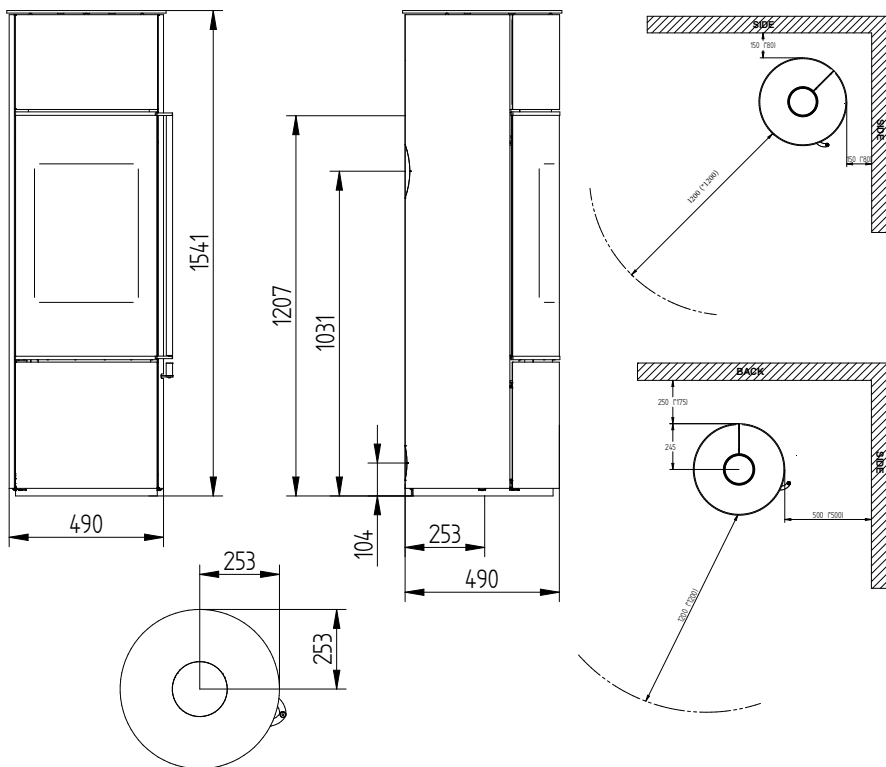

# OMEGA CHEF

## OMEGA SERIES

---

Clean combustion  
High efficiency  
Strong convection  
Timeless Design

DuplicAir<sup>®</sup> for simpel and easy  
air control  
Complete glass door with black frame  
180° flame visibility  
Self-closing door with magnets  
All round  
Start-up function  
Wood compartment door  
Including baking oven  
Fresh air inlet included  
Cast iron bottom  
Molded vermiculite  
Self-cleaning window  
Cold handle  
5 year warranty

### Can be purchased

Soft Close System (with pump)  
Rotating base  
Customized floorplate in 6 mm glass



---

Find all models here  
**JYDEPEJSEN.COM**



## TECHNICAL DATA OMEGA CHEF

|                                    |                         |
|------------------------------------|-------------------------|
| Min./max. output .....             | 3 - 8 kW                |
| Mean CO-emission .....             | 1216 mg/Nm <sup>3</sup> |
| Recommended chimney draft .....    | 12 pa                   |
| Weight .....                       | 169 kg                  |
| Smoke outlet .....                 | Ø 150 mm                |
| Diameter of fresh air intake ..... | Ø 100 mm                |
| Combustion chamber .....           | 412 x 368 x 407 mm      |
| Efficiency .....                   | 79%                     |
| Flue gas mass flow .....           | 6,5 G/S                 |
| Flue gas temperature .....         | 366 °C                  |
| Dust emission .....                | 15 mg/Nm <sup>3</sup>   |
| Type classification .....          | CA                      |
| Defra / Area Smoke Control .....   | ✓                       |
| §15A.....                          | ✓                       |

CE approved  
Defra approved

**A**

\*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

