

ORION

ORION SERIES

Cleanest combustion
High efficiency
Strong convection
Timeless design

DuplicAir® for simpel and easy
air control
Cast iron door
Self-closing door with magnets
Fresh air inlet included
Cast iron bottom
Molded vermiculite
Self-cleaning window
Start-up function
Cold handle
5 year warranty

Can be purchased
Customized floorplate out of 6 mm glass



Find all models here
JYDEPEJSEN.COM


TECHNICAL DATA ORION

Min./max. output	3 - 8 kW
Mean CO-emission	1216 mg/Nm ³
Recommended chimney draft	12 pa
Weight	166 kg
Smoke outlet	Ø 150 mm
Diameter of fresh air intake	Ø 100 mm
Combustion chamber	412 x 368 x 407 mm
Efficiency	79%
Flue gas mass flow	6,5 G/S
Flue gas temperature	366 °C
Dust emission	15 mg/Nm ³
Type classification	CA
Defra / Area Smoke Control	✓
§15A.....	✓

CE approved
Defra approved

A

*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

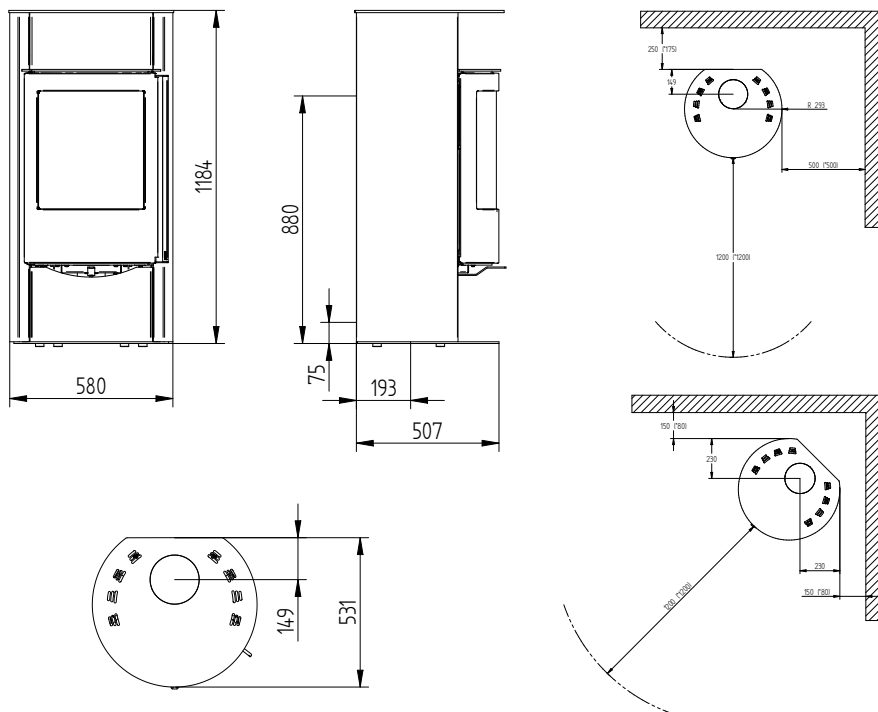

ORION

SOAPSTONE

ORION SERIES

Cleanest combustion
High efficiency
Strong convection
Timeless design

DuplicAir[®] for simpel and easy
air control
Cast iron door
Self-closing door with magnets
Fresh air inlet included
Cast iron bottom
Molded vermiculite
Self-cleaning window
Start-up function
Cold handle
5 year warranty

Can be purchased
Customized floorplate out of 6 mm glass



Find all models here
JYDEPEJSEN.COM


TECHNICAL DATA ORION SOAPSTONE

Min./max. output	3 - 8 kW
Mean CO-emission	1216 mg/Nm ³
Recommended chimney draft	12 pa
Weight	293 kg
Smoke outlet	Ø 150 mm
Diameter of fresh air intake	Ø 100 mm
Combustion chamber	412 x 368 x 407 mm
Efficiency	79%
Flue gas mass flow	6,5 G/S
Flue gas temperature	366 °C
Dust emission	15 mg/Nm ³
Type classification	CA
Defra / Area Smoke Control	✓
§15A.....	✓

CE approved
Defra approved

A

*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

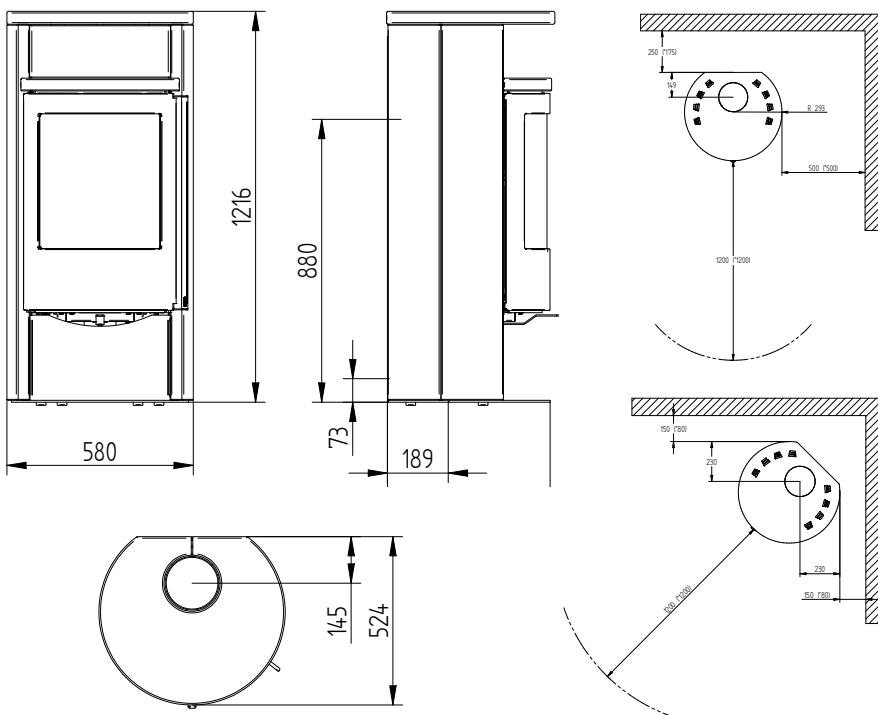

ORION

DARK SANDSTONE

ORION SERIES

Cleanest combustion
High efficiency
Strong convection
Timeless design

DuplicAir® for simpel and easy
air control
Cast iron door
Self-closing door with magnets
Fresh air inlet included
Cast iron bottom
Molded vermiculite
Self-cleaning window
Start-up function
Cold handle
5 year warranty

Can be purchased
Customized floorplate out of 6 mm glass



Find all models here
JYDEPEJSEN.COM


TECHNICAL DATA ORION DARK SANDSTONE

Min./max. output	3 - 8 kW
Mean CO-emission	1216 mg/Nm ³
Recommended chimney draft	12 pa
Weight	326 kg
Smoke outlet	Ø 150 mm
Diameter of fresh air intake	Ø 100 mm
Combustion chamber	412 x 368 x 407 mm
Efficiency	79%
Flue gas mass flow	6,5 G/S
Flue gas temperature	366 °C
Dust emission	15 mg/Nm ³
Type classification	CA
Defra / Area Smoke Control	✓
§15A.....	✓

CE approved
Defra approved

A

*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

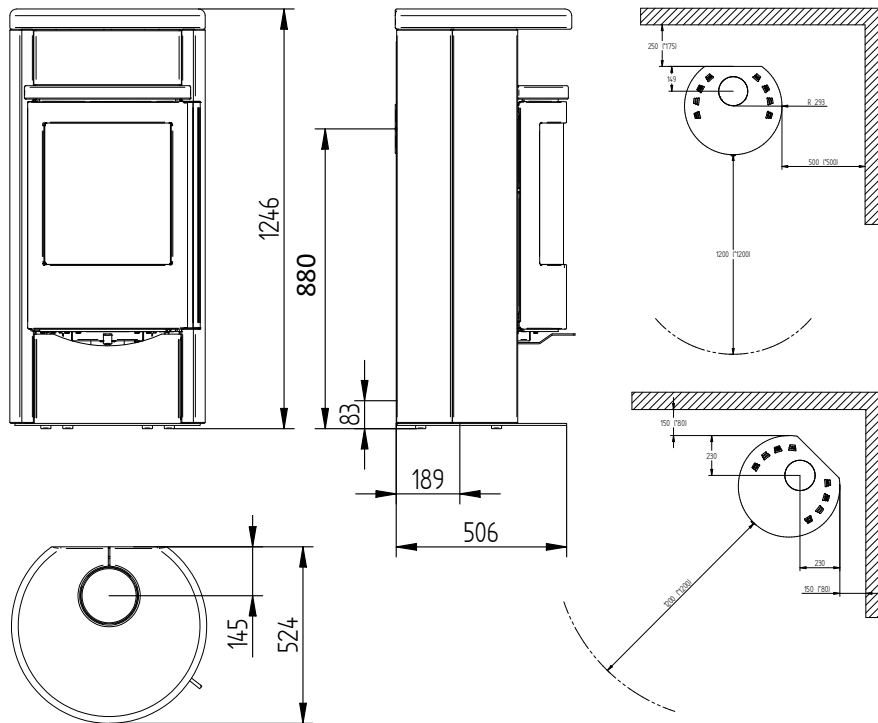

ORION

MOCA CREAM SANDSTONE

ORION SERIES

Cleanest combustion
High efficiency
Strong convection
Timeless design

DuplicAir® for simpel and easy
air control
Cast iron door
Self-closing door with magnets
Fresh air inlet included
Cast iron bottom
Molded vermiculite
Self-cleaning window
Start-up function
Cold handle
5 year warranty

Can be purchased
Customized floorplate out of 6 mm glass



Find all models here
JYDEPEJSEN.COM






TECHNICAL DATA ORION MOCA CREAM SANDSTONE

Min./max. output	3 - 8 kW
Mean CO-emission	1216 mg/Nm ³
Recommended chimney draft	12 pa
Weight	293 kg
Smoke outlet	Ø 150 mm
Diameter of fresh air intake	Ø 100 mm
Combustion chamber	412 x 368 x 407 mm
Efficiency	79%
Flue gas mass flow	6,5 G/S
Flue gas temperature	366 °C
Dust emission	15 mg/Nm ³
Type classification	CA
Defra / Area Smoke Control	✓
§15A.....	✓

CE approved
Defra approved

A

*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

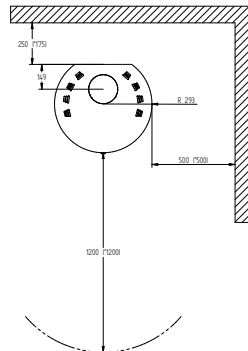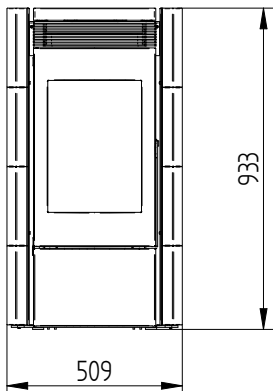

ORION

GREY WOOD SANDSTONE

ORION SERIES

Cleanest combustion
High efficiency
Strong convection
Timeless design

DuplicAir[®] for simpel and easy
air control
Cast iron door
Self-closing door with magnets
Fresh air inlet included
Cast iron bottom
Molded vermiculite
Self-cleaning window
Start-up function
Cold handle
5 year warranty

Can be purchased
Customized floorplate out of 6 mm glass



Find all models here
JYDEPEJSEN.COM

TECHNICAL DATA ORION GREY WOOD SANDSTONE

Min./max. output	3 - 8 kW
Mean CO-emission	1216 mg/Nm ³
Recommended chimney draft	12 pa
Weight	293 kg
Smoke outlet	Ø 150 mm
Diameter of fresh air intake	Ø 100 mm
Combustion chamber	412 x 368 x 407 mm
Efficiency	79%
Flue gas mass flow	6,5 G/S
Flue gas temperature	366 °C
Dust emission	15 mg/Nm ³
Type classification	CA
Defra / Area Smoke Control	✓
§15A.....	✓

CE approved
Defra approved

A

*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

