

SENZA

SENZA SERIES

DESIGNED BY
MADS MILTERSEN

Cleanest combustion
High efficiency
Strong convection
Timeless design

DuplicAir® for simpel and easy
air control
Cast iron door
Self-closing door with magnets
Cast iron wood compartment door
Cast iron bottom
Cast iron top
Molded vermiculite
Fresh air inlet included
Self-cleaning window
2 optional handles
5 year warranty

Can be purchased
Customized floorplate out of 6 mm glass



Find all models here
JYDEPEJSEN.COM




TECHNICAL DATA SENZA

Min./max. output	3 - 5 kW
Mean CO-emission	1119mg/Nm ³
Recommended chimney draft	12 pa
Weight	96 kg
Smoke outlet	Ø 150 mm
Diameter of fresh air intake	Ø 100 mm
Combustion chamber	430 x 318 x 255 mm
Efficiency	82%
Flue gas mass flow	4,7 G/S
Flue gas temperature	392 °C
Dust emission	12 mg/Nm ³
Type classification	CA
Defra / Area Smoke Control	✓
§15A.....	✓

CE approved
Defra approved

A⁺

*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

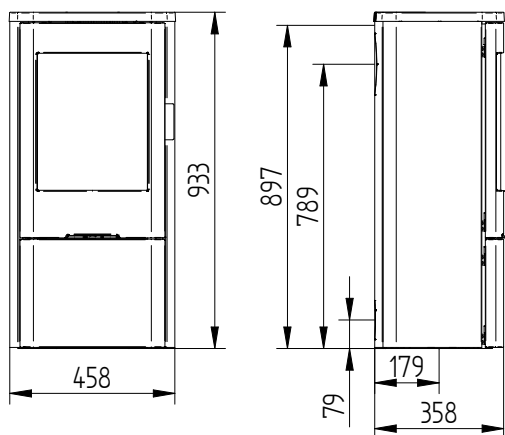

SENZA

W/SIDE GLASS

SENZA SERIES

DESIGNED BY
MADS MILTERSEN

Cleanest combustion
High efficiency
Strong convection
Timeless design

DuplicAir® for simpel and easy
air control
Cast iron door
Self-closing door with magnets
Cast iron wood compartment door
Cast iron bottom
Cast iron top
Molded vermiculite
Fresh air inlet included
Self-cleaning window
2 optional handles
5 year warranty

Can be purchased
Customized floorplate out of 6 mm glass



Find all models here
JYDEPEJSEN.COM


TECHNICAL DATA SENZA W/SIDE GLASS

Min./max. output	3 - 5 kW
Mean CO-emission	1119mg/Nm ³
Recommended chimney draft	12 pa
Weight	95 kg
Smoke outlet	Ø 150 mm
Diameter of fresh air intake	Ø 100 mm
Combustion chamber	430 x 318 x 255 mm
Efficiency	82%
Flue gas mass flow	4,7 G/S
Flue gas temperature	293 °C
Dust emission	12 mg/Nm ³
Type classification	CA
Defra / Area Smoke Control	✓
§15A.....	✓

CE approved
Defra approved

A⁺

*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

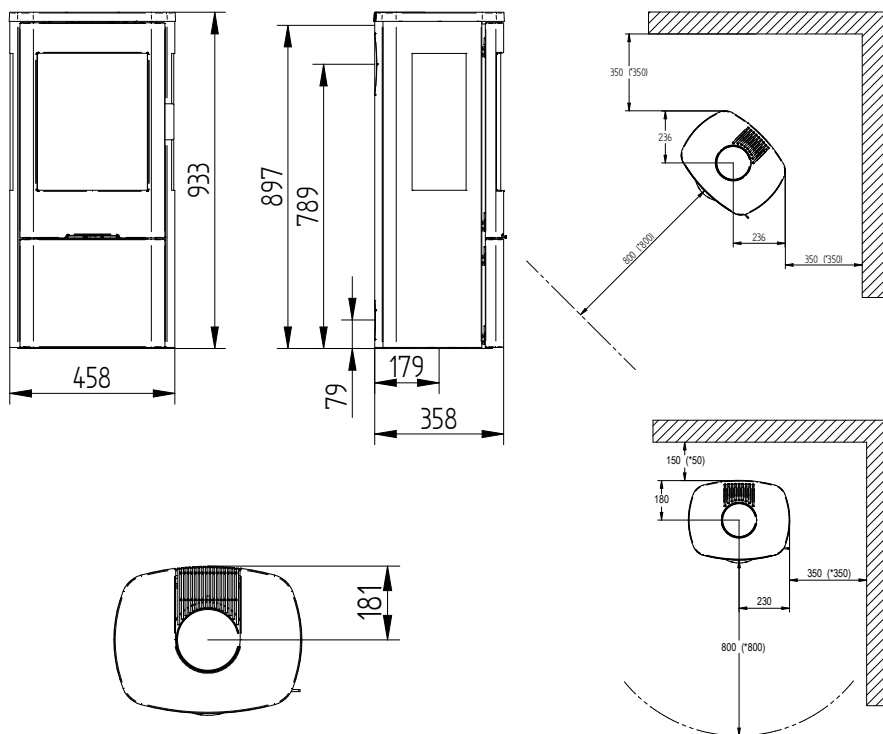

SENZA

HIGH

SENZA SERIES

DESIGNED BY
MADS MILTERSEN

Cleanest combustion
High efficiency
Strong convection
Timeless design

DuplicAir® for simpel and easy
air control
Cast iron door
Self-closing door with magnets
Cast iron wood compartment door
Cast iron bottom
Cast iron top
Molded vermiculite
Fresh air inlet included
Self-cleaning window
2 optional handles
5 year warranty

Can be purchased
Customized floorplate out of 6 mm glass



Find all models here
JYDEPEJSEN.COM






TECHNICAL DATA SENZA HIGH

Min./max. output	3 - 5 kW
Mean CO-emission	1119mg/Nm ³
Recommended chimney draft	12 pa
Weight	112 kg
Smoke outlet	Ø 150 mm
Accumulation stone	36 kg - Optional
Diameter of fresh air intake	Ø 100 mm
Combustion chamber	430 x 318 x 255 mm
Efficiency	82%
Flue gas mass flow	4,7 G/S
Flue gas temperature	293 °C
Dust emission	12 mg/Nm ³
Type classification	CA
Defra / Area Smoke Control	✓
§15A.....	✓

CE approved
Defra approved



*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

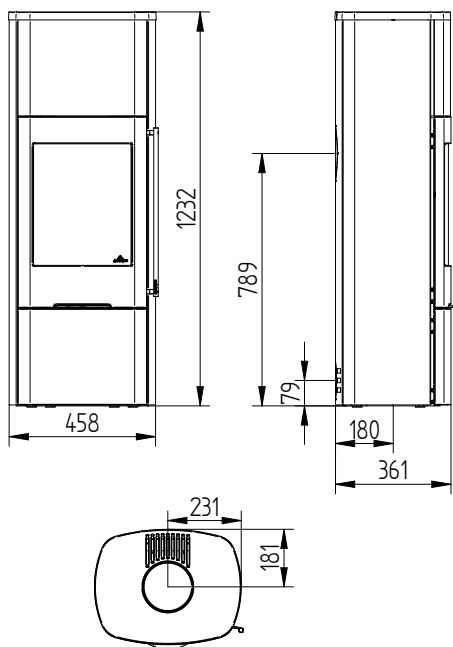

SENZA

HIGH W/SIDE GLASS

SENZA SERIES

DESIGNED BY
MADS MILTERSEN

Cleanest combustion
High efficiency
Strong convection
Timeless design

DuplicAir® for simpel and easy
air control
Cast iron door
Self-closing door with magnets
Cast iron wood compartment door
Cast iron bottom
Cast iron top
Molded vermiculite
Fresh air inlet included
Self-cleaning window
2 optional handles
5 year warranty

Can be purchased
Customized floorplate out of 6 mm glass



Find all models here
JYDEPEJSEN.COM



TECHNICAL DATA SENZA HIGH W/SIDE GLASS

Min./max. output	3 - 5 kW
Mean CO-emission	1119mg/Nm ³
Recommended chimney draft	12 pa
Weight	111 kg
Smoke outlet	Ø 150 mm
Accumulation stone	36 kg - Optional
Diameter of fresh air intake	Ø 100 mm
Combustion chamber	430 x 318 x 255 mm
Efficiency	82%
Flue gas mass flow	4,7 G/S
Flue gas temperature	293 °C
Dust emission	12 mg/Nm ³
Type classification	CA
Defra / Area Smoke Control	✓
§15A.....	✓

CE approved
Defra approved



*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

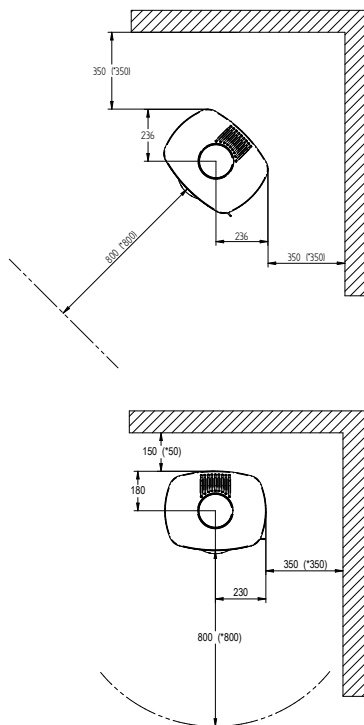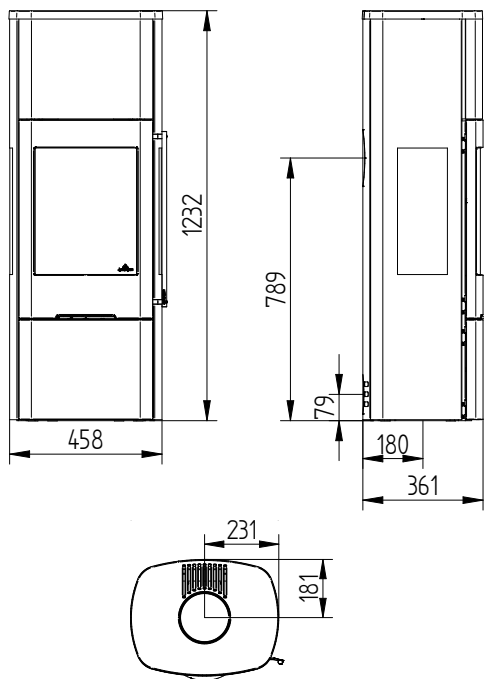

SENZA

SOAPSTONE

SENZA SERIES

DESIGNED BY
MADS MILTERSEN

Cleanest combustion
High efficiency
Strong convection
Timeless design

DuplicAir® for simpel and easy
air control
Cast iron door
Self-closing door with magnets
Cast iron wood compartment door
Cast iron bottom
Cast iron top
Molded vermiculite
Fresh air inlet included
Self-cleaning window
2 optional handles
5 year warranty

Can be purchased

Customized floorplate out of 6 mm glass



Find all models here
JYDEPEJSEN.COM






TECHNICAL DATA SENZA SOAPSTONE

Min./max. output	3 - 5 kW
Mean CO-emission	1119mg/Nm ³
Recommended chimney draft	12 pa
Weight	154 kg
Smoke outlet	Ø 150 mm
Diameter of fresh air intake	Ø 100 mm
Combustion chamber	430 x 318 x 255 mm
Efficiency	82%
Flue gas mass flow	4,7 G/S
Flue gas temperature	293 °C
Dust emission	12 mg/Nm ³
Type classification	CA
Defra / Area Smoke Control	✓
§15A.....	✓

CE approved
Defra approved



*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

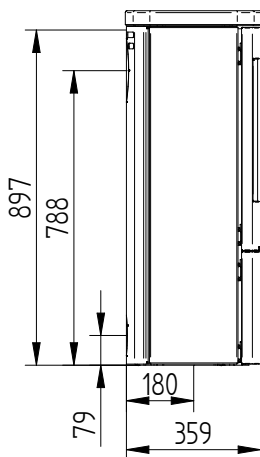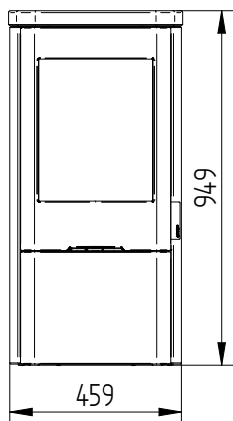

SENZA

SOAPSTONE W/SIDE GLASS

SENZA SERIES

DESIGNED BY
MADS MILTERSEN

Cleanest combustion
High efficiency
Strong convection
Timeless design

DuplicAir® for simpel and easy
air control
Cast iron door
Self-closing door with magnets
Cast iron wood compartment door
Cast iron bottom
Cast iron top
Molded vermiculite
Fresh air inlet included
Self-cleaning window
2 optional handles
5 year warranty

Can be purchased
Customized floorplate out of 6 mm glass



Find all models here
JYDEPEJSEN.COM


TECHNICAL DATA SENZA SOAPSTONE W/SIDE GLASS

Min./max. output	3 - 5 kW
Mean CO-emission	1119mg/Nm ³
Recommended chimney draft	12 pa
Weight	140 kg
Smoke outlet	Ø 150 mm
Diameter of fresh air intake	Ø 100 mm
Combustion chamber	430 x 318 x 255 mm
Efficiency	82%
Flue gas mass flow	4,7 G/S
Flue gas temperature	293 °C
Dust emission	12 mg/Nm ³
Type classification	CA
Defra / Area Smoke Control	✓
§15A.....	✓

CE approved
Defra approved

A⁺

*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

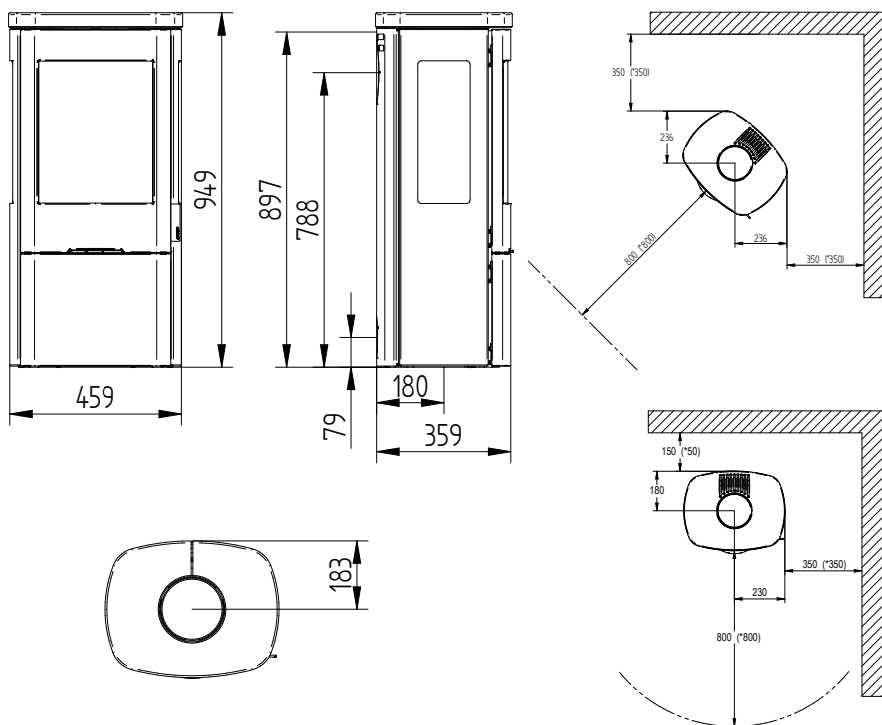

SENZA

DARK SANDSTONE

SENZA SERIES

DESIGNED BY
MADS MILTERSEN

Cleanest combustion
High efficiency
Strong convection
Timeless design

DuplicAir® for simpel and easy
air control
Cast iron door
Self-closing door with magnets
Cast iron wood compartment door
Cast iron bottom
Cast iron top
Molded vermiculite
Fresh air inlet included
Self-cleaning window
2 optional handles
5 year warranty

Can be purchased
Customized floorplate out of 6 mm glass



Find all models here
JYDEPEJSEN.COM






TECHNICAL DATA SENZA DARK SANDSTONE

Min./max. output	3 - 5 kW
Mean CO-emission	1119mg/Nm ³
Recommended chimney draft	12 pa
Weight	154 kg
Smoke outlet	Ø 150 mm
Diameter of fresh air intake	Ø 100 mm
Combustion chamber	430 x 318 x 255 mm
Efficiency	82%
Flue gas mass flow	4,7 G/S
Flue gas temperature	293 °C
Dust emission	12 mg/Nm ³
Type classification	CA
Defra / Area Smoke Control	✓
§15A.....	✓

CE approved
Defra approved

A⁺

*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

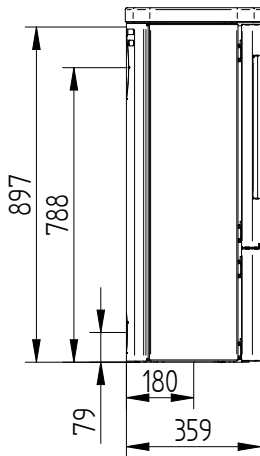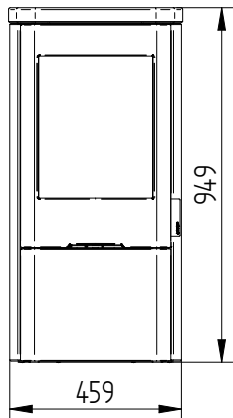

SENZA

DARK SANDSTONE W/SIDE GLASS

SENZA SERIES

DESIGNED BY
MADS MILTERSEN

Cleanest combustion
High efficiency
Strong convection
Timeless design

DuplicAir® for simpel and easy
air control
Cast iron door
Self-closing door with magnets
Cast iron wood compartment door
Cast iron bottom
Cast iron top
Molded vermiculite
Fresh air inlet included
Self-cleaning window
2 optional handles
5 year warranty

Can be purchased
Customized floorplate out of 6 mm glass



Find all models here
JYDEPEJSEN.COM


TECHNICAL DATA SENZA DARK SANDSTONE W/SIDE GLASS

Min./max. output	3 - 5 kW
Mean CO-emission	1119mg/Nm ³
Recommended chimney draft	12 pa
Weight	140 kg
Smoke outlet	Ø 150 mm
Diameter of fresh air intake	Ø 100 mm
Combustion chamber	430 x 318 x 255 mm
Efficiency	82%
Flue gas mass flow	4,7 G/S
Flue gas temperature	293 °C
Dust emission	12 mg/Nm ³
Type classification	CA
Defra / Area Smoke Control	✓
§15A.....	✓

CE approved
Defra approved

A⁺

*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

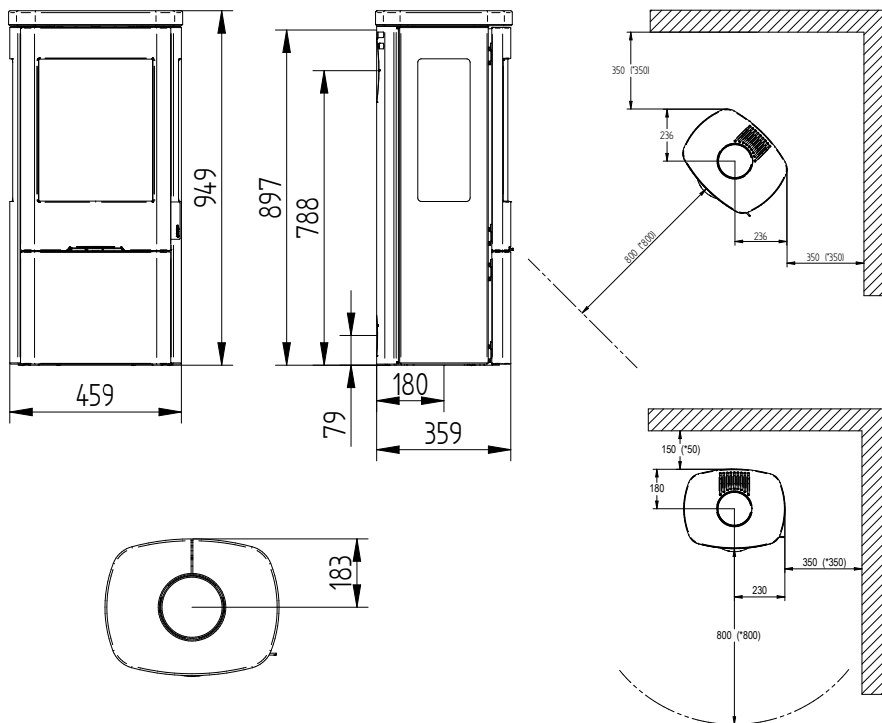

SENZA

MOCA CREAM SANDSTONE

SENZA SERIES

DESIGNED BY
MADS MILTERSEN

Cleanest combustion
High efficiency
Strong convection
Timeless design

DuplicAir® for simpel and easy
air control
Cast iron door
Self-closing door with magnets
Cast iron wood compartment door
Cast iron bottom
Cast iron top
Molded vermiculite
Fresh air inlet included
Self-cleaning window
2 optional handles
5 year warranty

Can be purchased
Customized floorplate out of 6 mm glass



Find all models here
JYDEPEJSEN.COM






TECHNICAL DATA SENZA MOCA CREAM SANDSTONE

Min./max. output	3 - 5 kW
Mean CO-emission	1119mg/Nm ³
Recommended chimney draft	12 pa
Weight	154 kg
Smoke outlet	Ø 150 mm
Diameter of fresh air intake	Ø 100 mm
Combustion chamber	430 x 318 x 255 mm
Efficiency	82%
Flue gas mass flow	4,7 G/S
Flue gas temperature	293 °C
Dust emission	12 mg/Nm ³
Type classification	CA
Defra / Area Smoke Control	✓
§15A.....	✓

CE approved
Defra approved

A⁺

*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

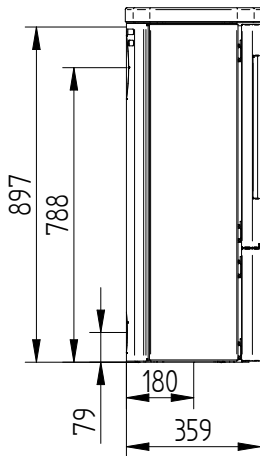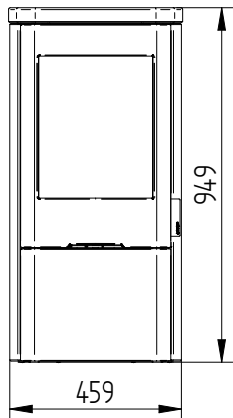

SENZA

MOCA CREAM SANDSTONE W/SIDE GLASS

SENZA SERIES

DESIGNED BY
MADS MILTERSEN

Cleanest combustion
High efficiency
Strong convection
Timeless design

DuplicAir[®] for simpel and easy
air control
Cast iron door
Self-closing door with magnets
Cast iron wood compartment door
Cast iron bottom
Cast iron top
Molded vermiculite
Fresh air inlet included
Self-cleaning window
2 optional handles
5 year warranty

Can be purchased
Customized floorplate out of 6 mm glass



Find all models here
JYDEPEJSEN.COM


TECHNICAL DATA SENZA MOCA CREAM SANDSTONE W/SIDE GLASS

Min./max. output	3 - 5 kW
Mean CO-emission	1119mg/Nm ³
Recommended chimney draft	12 pa
Weight	140 kg
Smoke outlet	Ø 150 mm
Diameter of fresh air intake	Ø 100 mm
Combustion chamber	430 x 318 x 255 mm
Efficiency	82%
Flue gas mass flow	4,7 G/S
Flue gas temperature	293 °C
Dust emission	12 mg/Nm ³
Type classification	CA
Defra / Area Smoke Control	✓
§15A.....	✓

CE approved
Defra approved

A⁺

*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

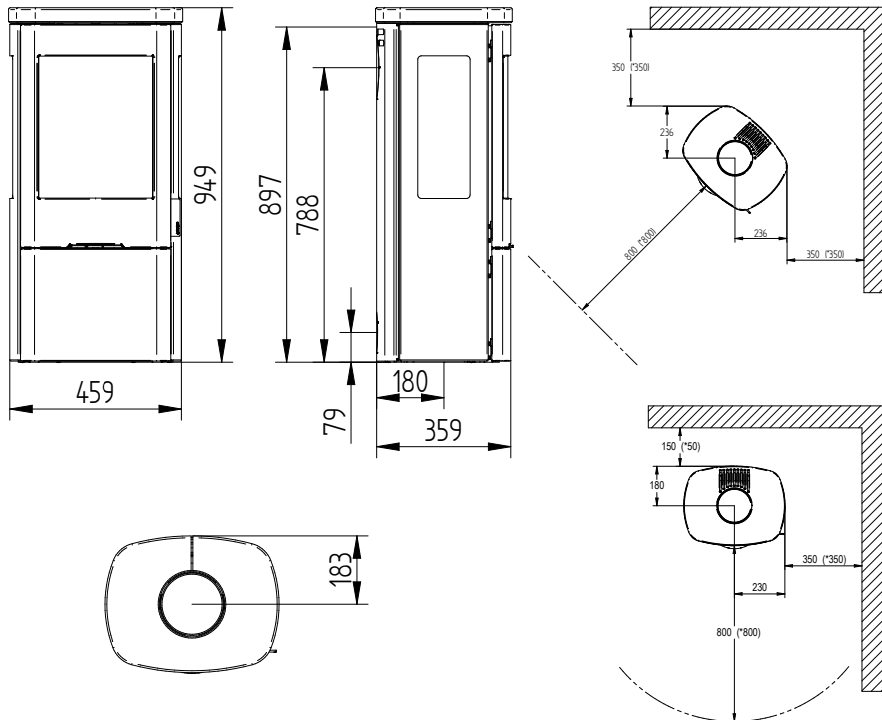

SENZA

WALL

SENZA SERIES

DESIGNED BY
MADS MILTERSEN

Cleanest combustion
High efficiency
Strong convection
Timeless design

DuplicAir® for simpel and easy
air control
Cast iron door
Self-closing door with magnets
Cast iron wood compartment door
Cast iron bottom
Cast iron top
Molded vermiculite
Fresh air inlet included
Self-cleaning window
2 optional handles
5 year warranty

Can be purchased

Customized floorplate out of 6 mm glass



Find all models here
JYDEPEJSEN.COM


TECHNICAL DATA SENZA WALL

Min./max. output	3 - 5 kW
Mean CO-emission	1119mg/Nm ³
Recommended chimney draft	12 pa
Weight	96 kg
Smoke outlet	Ø 150 mm
Diameter of fresh air intake	Ø 100 mm
Combustion chamber	430 x 318 x 255 mm
Efficiency	82%
Flue gas mass flow	4,7 G/S
Flue gas temperature	293 °C
Dust emission	12 mg/Nm ³
Type classification	CA
Defra / Area Smoke Control	✓
§15A.....	✓

CE approved
Defra approved



*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

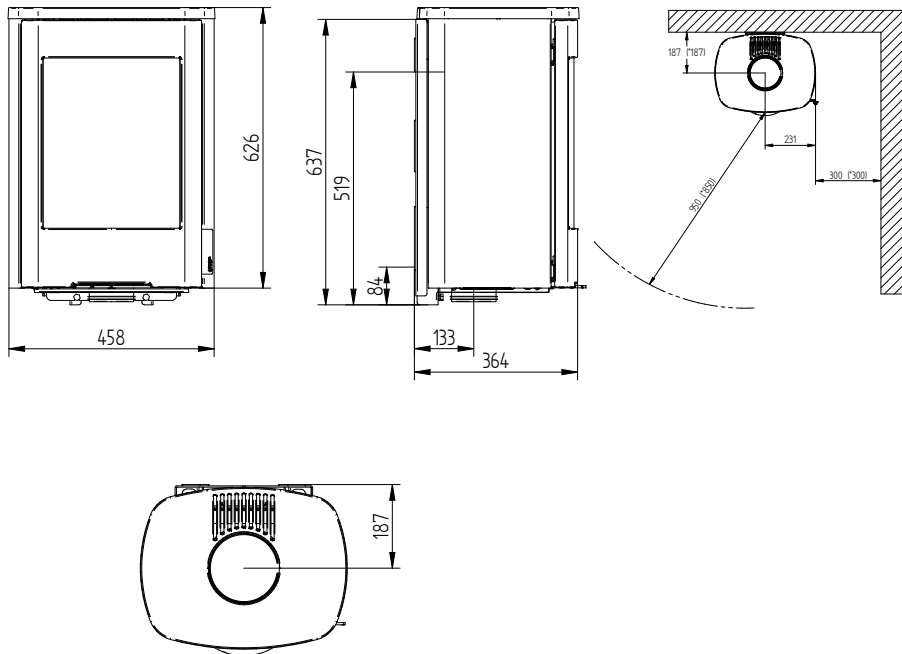

SENZA

WALL W/SIDE GLASS

SENZA SERIES

DESIGNED BY
MADS MILTERSEN

Cleanest combustion
High efficiency
Strong convection
Timeless design

DuplicAir[®] for simpel and easy
air control
Cast iron door
Self-closing door with magnets
Cast iron wood compartment door
Cast iron bottom
Cast iron top
Molded vermiculite
Fresh air inlet included
Self-cleaning window
2 optional handles
5 year warranty

Can be purchased
Customized floorplate out of 6 mm glass



Find all models here
JYDEPEJSEN.COM

TECHNICAL DATA SENZA WALL W/SIDE GLASS

Min./max. output	3 - 5 kW
Mean CO-emission	1119mg/Nm ³
Recommended chimney draft	12 pa
Weight	96 kg
Smoke outlet	Ø 150 mm
Diameter of fresh air intake	Ø 100 mm
Combustion chamber	430 x 318 x 255 mm
Efficiency	82%
Flue gas mass flow	4,7 G/S
Flue gas temperature	293 °C
Dust emission	12 mg/Nm ³
Type classification	CA
Defra / Area Smoke Control	✓
§15A.....	✓

CE approved
Defra approved

A⁺

*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

