

# SIGMA

## SIGMA SERIES

---

Build in the heat  
High efficiency  
Strong convection  
Timeless design

DuplicAir® for simpel and easy  
air control  
Full glass front  
Widescreen format  
Self-closing door with magnets  
Cast iron base  
Option for customisation  
Space for large firewood logs  
Molded vermiculite  
Self-cleaning window  
Start-up function  
Cold handle  
5 year warranty

**Can be purchased**  
Special frame with/without bending



---


Find all models here  
**JYDEPEJSEN.COM**

## TECHNICAL DATA SIGMA

|                                     |                        |
|-------------------------------------|------------------------|
| Min./max. output .....              | 4 - 8 kW               |
| Mean CO-emission .....              | 550 mg/Nm <sup>3</sup> |
| Recommended chimney draft .....     | 12 pa                  |
| Weight .....                        | 140 kg                 |
| Smoke outlet .....                  | Ø 150 mm               |
| Diameter of fresh air intake .....  | Ø 100 mm               |
| Combustion chamber .....            | 360 x 580 x 290 mm     |
| Min. installation dimensions: ..... | B 858 x H 565          |
| Efficiency .....                    | 79%                    |
| Flue gas mass flow .....            | 7,2 G/S                |
| Flue gas temperature .....          | 334 °C                 |
| Dust emission .....                 | 12 mg/Nm <sup>3</sup>  |
| Type classification .....           | BE                     |
| Defra / Area Smoke Control .....    | ✓                      |
| §15A .....                          | ✓                      |

CE approved  
Defra approved

**A**

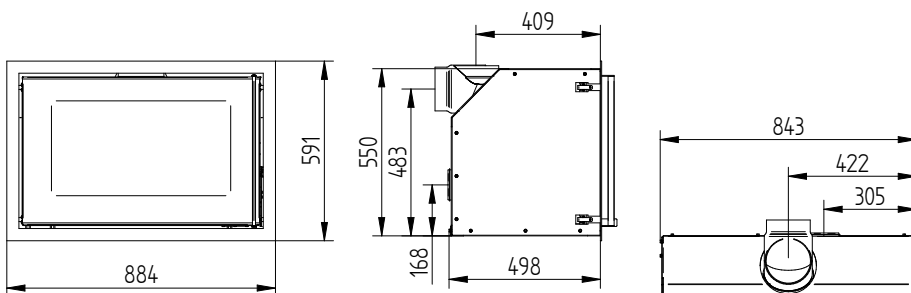



# SIGMA TITAN 1

## SIGMA SERIES

---

Build in the heat  
High efficiency  
Strong convection  
Timeless design

DuplicAir® for simpel and easy  
air control  
Full glass front  
Widescreen format  
Unique soapstone furniture design  
Self-closing door with magnets  
Cast iron base  
Option for customisation  
Space for large firewood logs  
Molded vermiculite  
Self-cleaning window  
Start-up function  
Cold handle  
5 year warranty

**Can be purchased**  
Bench in 2 variants



---

Find all models here  
**JYDEPEJSEN.COM**




## TECHNICAL DATA SIGMA TITAN 1

|                                    |                        |
|------------------------------------|------------------------|
| Min./max. output .....             | 4 - 8 kW               |
| Mean CO-emission .....             | 550 mg/Nm <sup>3</sup> |
| Recommended chimney draft .....    | 12 pa                  |
| Weight .....                       | 820 kg                 |
| Smoke outlet .....                 | Ø 150 mm               |
| Diameter of fresh air intake ..... | Ø 100 mm               |
| Combustion chamber .....           | 360 x 580 x 290 mm     |
| Efficiency .....                   | 79%                    |
| Flue gas mass flow .....           | 7,2 G/S                |
| Flue gas temperature .....         | 334 °C                 |
| Dust emission .....                | 12 mg/Nm <sup>3</sup>  |
| Type classification .....          | BE                     |
| Defra / Area Smoke Control .....   | ✓                      |
| §15A.....                          | ✓                      |

CE approved  
Defra approved

A

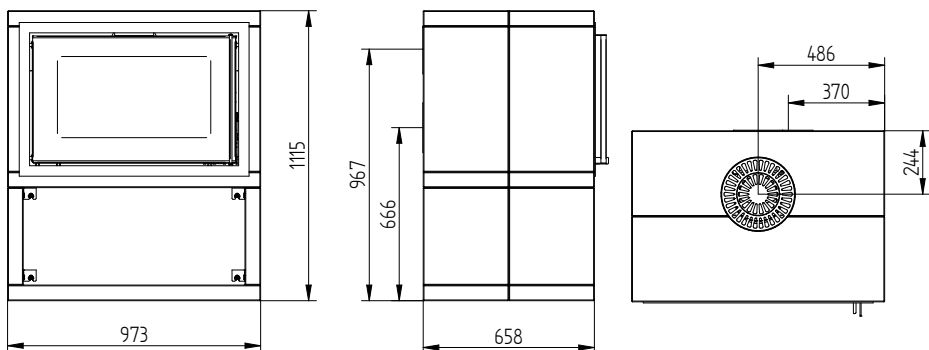



# SIGMA TITAN 2

## SIGMA SERIES

---

Build in the heat  
High efficiency  
Strong convection  
Timeless design

DuplicAir® for simpel and easy  
air control  
Full glass front  
Widescreen format  
Unique soapstone furniture design  
Self-closing door with magnets  
Cast iron base  
Option for customisation  
Space for large firewood logs  
Molded vermiculite  
Self-cleaning window  
Start-up function  
Cold handle  
5 year warranty

**Can be purchased**  
Bench in 2 variants



---


Find all models here  
**JYDEPEJSEN.COM**

## TECHNICAL DATA SIGMA TITAN 2

|                                    |                        |
|------------------------------------|------------------------|
| Min./max. output .....             | 4 - 8 kW               |
| Mean CO-emission .....             | 550 mg/Nm <sup>3</sup> |
| Recommended chimney draft .....    | 12 pa                  |
| Weight .....                       | 784 kg                 |
| Smoke outlet .....                 | Ø 150 mm               |
| Diameter of fresh air intake ..... | Ø 100 mm               |
| Combustion chamber .....           | 360 x 580 x 290 mm     |
| Efficiency .....                   | 79%                    |
| Flue gas mass flow .....           | 7,2 G/S                |
| Flue gas temperature .....         | 334 °C                 |
| Dust emission .....                | 12 mg/Nm <sup>3</sup>  |
| Type classification .....          | BE                     |
| Defra / Area Smoke Control .....   | ✓                      |
| §15A.....                          | ✓                      |

CE approved  
Defra approved

**A**

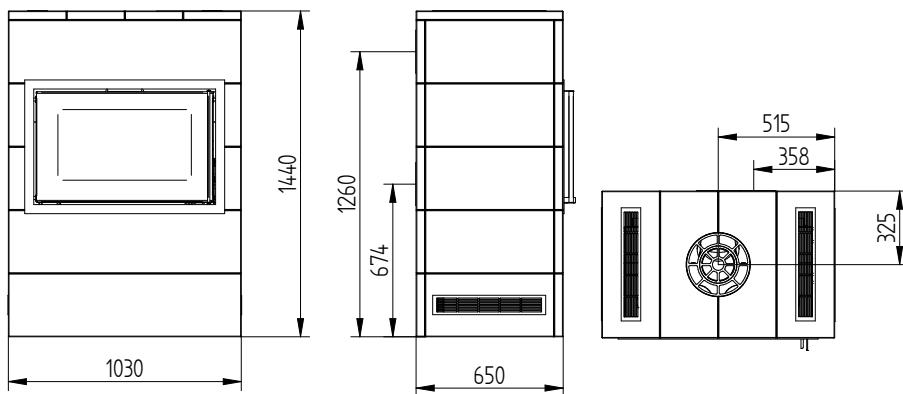



# SIGMA TITAN 3

## SIGMA SERIES

---

Build in the heat  
High efficiency  
Strong convection  
Timeless design

DuplicAir<sup>®</sup> for simpel and easy  
air control  
Full glass front  
Widescreen format  
Unique soapstone furniture design  
Self-closing door with magnets  
Cast iron base  
Option for customisation  
Space for large firewood logs  
Molded vermiculite  
Self-cleaning window  
Start-up function  
Cold handle  
5 year warranty

**Can be purchased**  
Bench in 2 variants



---

Find all models here  
**JYDEPEJSEN.COM**

## TECHNICAL DATA SIGMA TITAN 3

|                                    |                        |
|------------------------------------|------------------------|
| Min./max. output .....             | 4 - 8 kW               |
| Mean CO-emission .....             | 550 mg/Nm <sup>3</sup> |
| Recommended chimney draft .....    | 12 pa                  |
| Weight .....                       | 892 kg                 |
| Smoke outlet .....                 | Ø 150 mm               |
| Diameter of fresh air intake ..... | Ø 100 mm               |
| Combustion chamber .....           | 360 x 580 x 290 mm     |
| Efficiency .....                   | 79%                    |
| Flue gas mass flow .....           | 7,2 G/S                |
| Flue gas temperature .....         | 334 °C                 |
| Dust emission .....                | 12 mg/Nm <sup>3</sup>  |
| Type classification .....          | BE                     |
| Defra / Area Smoke Control .....   | ✓                      |
| §15A.....                          | ✓                      |

CE approved  
Defra approved

**A**

