

TROJA 44

SOAPSTONE

TROJA SERIES

High visibility of the flame and high
heat release
High efficiency
Strong convection
Timeless design

DuplicAir[®] for simpel and easy air control
Cast iron door
Self-closing door with magnets
Fresh air inlet included
Convection grill on top
Cast iron bottom
Molded vermiculite
Self-cleaning window
Cold handle
5 year warranty
Start-up function

Can be purchased
Accumulation stone (121 kg)
Customized floorplate out of 6 mm glass



Find all models here
JYDEPEJSEN.COM




TECHNICAL DATA TROJA 44 SOAPSTONE

Min./max. output	3 - 8 kW
Mean CO-emission	1216 mg/Nm ³
Recommended chimney draft	12 pa
Weight	339 kg
Smoke outlet	Ø 150 mm
Diameter of fresh air intake	Ø 100 mm
Combustion chamber	412 x 368 x 407 mm
Efficiency	79%
Flue gas mass flow	6,5 G/S
Flue gas temperature	366 °C
Dust emission	15 mg/Nm ³
Type classification	CA
Defra / Area Smoke Control	✓
§15A.....	✓

CE approved
Defra approved

A

*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

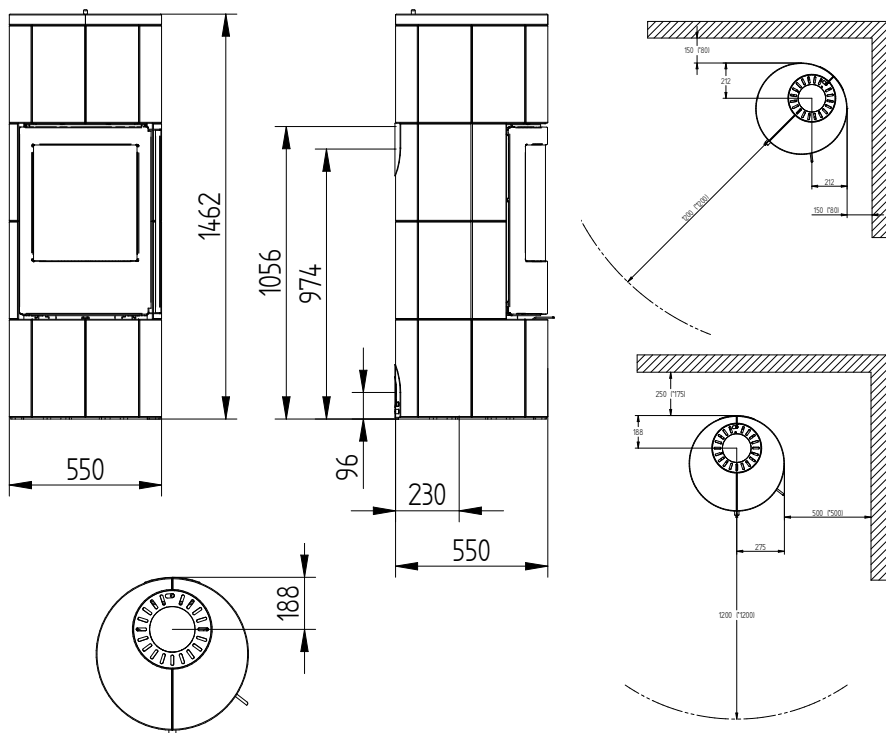

TROJA 44

DARK SANDSTONE

TROJA SERIES

High visibility of the flame and high
heat release
High efficiency
Strong convection
Timeless design

DuplicAir® for simpel and easy air control
Cast iron door
Self-closing door with magnets
Fresh air inlet included
Convection grill on top
Cast iron bottom
Molded vermiculite
Self-cleaning window
Cold handle
5 year warranty
Start-up function

Can be purchased
Accumulation stone (121 kg)
Customized floorplate out of 6 mm glass



Find all models here
JYDEPEJSEN.COM


TECHNICAL DATA TROJA 44 DARK SANDSTONE

Min./max. output	3 - 8 kW
Mean CO-emission	1216 mg/Nm ³
Recommended chimney draft	12 pa
Weight	373 kg
Smoke outlet	Ø 150 mm
Diameter of fresh air intake	Ø 100 mm
Combustion chamber	412 x 368 x 407 mm
Efficiency	79%
Flue gas mass flow	6,5 G/S
Flue gas temperature	366 °C
Dust emission	15 mg/Nm ³
Type classification	CA
Defra / Area Smoke Control	✓
§15A.....	✓

CE approved
Defra approved

A

*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

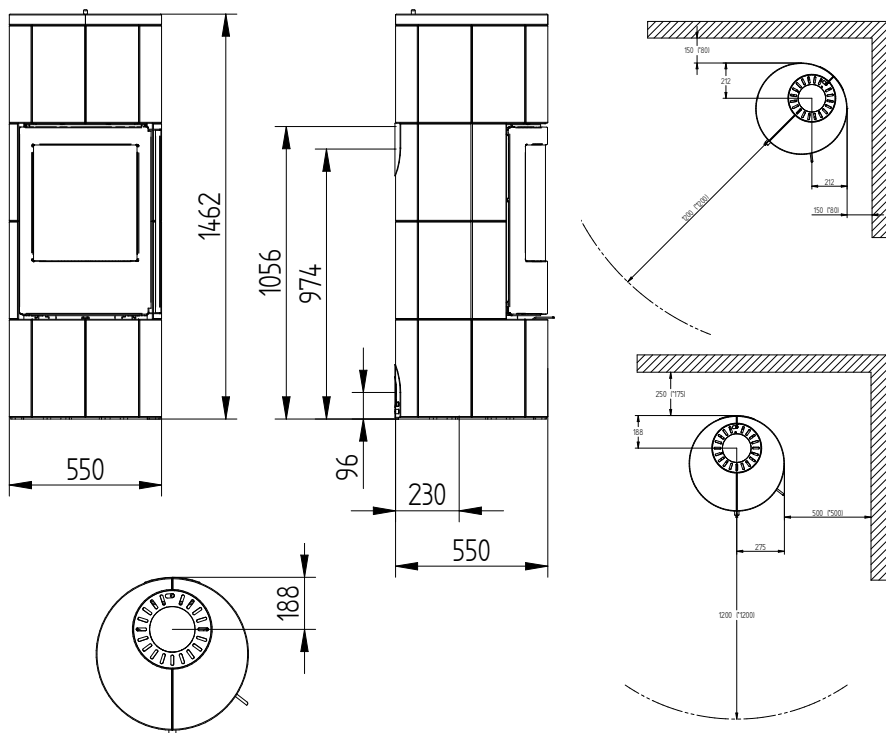

TROJA 45

SOAPSTONE

TROJA SERIES

High visibility of the flame and high
heat release
High efficiency
Strong convection
Timeless design

DuplicAir[®] for simpel and easy air control
Cast iron door
Self-closing door with magnets
Fresh air inlet included
Convection grill on top
Cast iron bottom
Molded vermiculite
Self-cleaning window
Cold handle
5 year warranty
Start-up function

Can be purchased

Accumulation stone (242 kg)
Customized floorplate out of 6 mm glass



Find all models here
JYDEPEJSEN.COM


TECHNICAL DATA TROJA 45 SOAPSTONE

Min./max. output	3 - 8 kW
Mean CO-emission	1216 mg/Nm ³
Recommended chimney draft	12 pa
Weight	410 kg
Smoke outlet	Ø 150 mm
Diameter of fresh air intake	Ø 100 mm
Combustion chamber	412 x 368 x 407 mm
Efficiency	79%
Flue gas mass flow	6,5 G/S
Flue gas temperature	366 °C
Dust emission	15 mg/Nm ³
Type classification	CA
Defra / Area Smoke Control	✓
§15A.....	✓

CE approved
Defra approved

A

*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

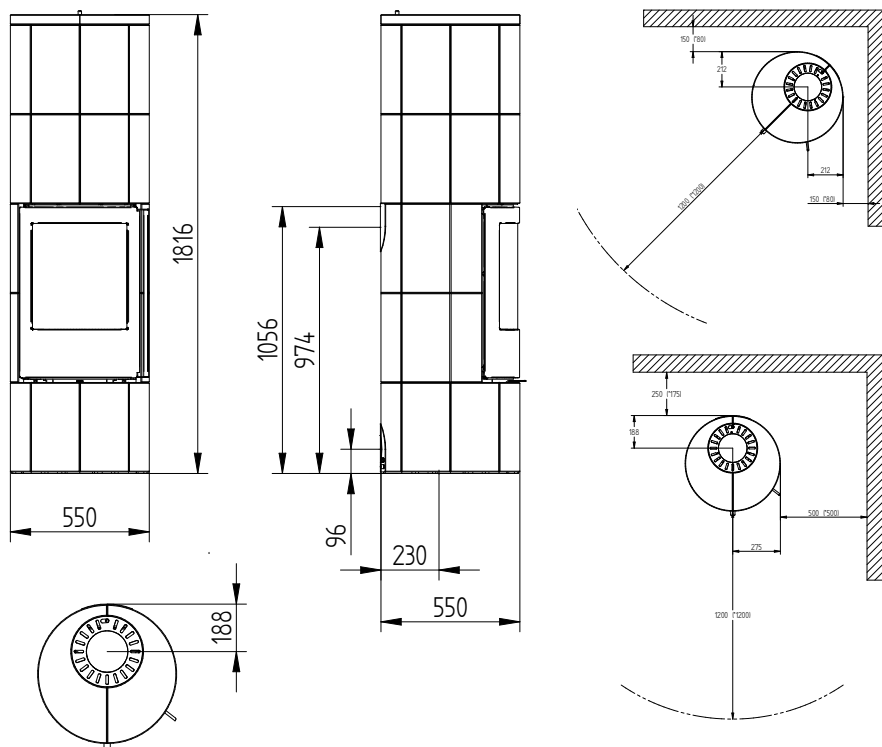

TROJA 45

DARK SANDSTONE

TROJA SERIES

High visibility of the flame and high
heat release
High efficiency
Strong convection
Timeless design

DuplicAir[®] for simpel and easy air control
Cast iron door
Self-closing door with magnets
Fresh air inlet included
Convection grill on top
Cast iron bottom
Molded vermiculite
Self-cleaning window
Cold handle
5 year warranty
Start-up function

Can be purchased

Accumulation stone (242 kg)
Customized floorplate out of 6 mm glass



Find all models here
JYDEPEJSEN.COM


TECHNICAL DATA TROJA 45 DARK SANDSTONE

Min./max. output	3 - 8 kW
Mean CO-emission	1216 mg/Nm ³
Recommended chimney draft	12 pa
Weight	453 kg
Smoke outlet	Ø 150 mm
Diameter of fresh air intake	Ø 100 mm
Combustion chamber	412 x 368 x 407 mm
Efficiency	79%
Flue gas mass flow	6,5 G/S
Flue gas temperature	366 °C
Dust emission	15 mg/Nm ³
Type classification	CA
Defra / Area Smoke Control	✓
§15A.....	✓

CE approved
Defra approved

A

*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

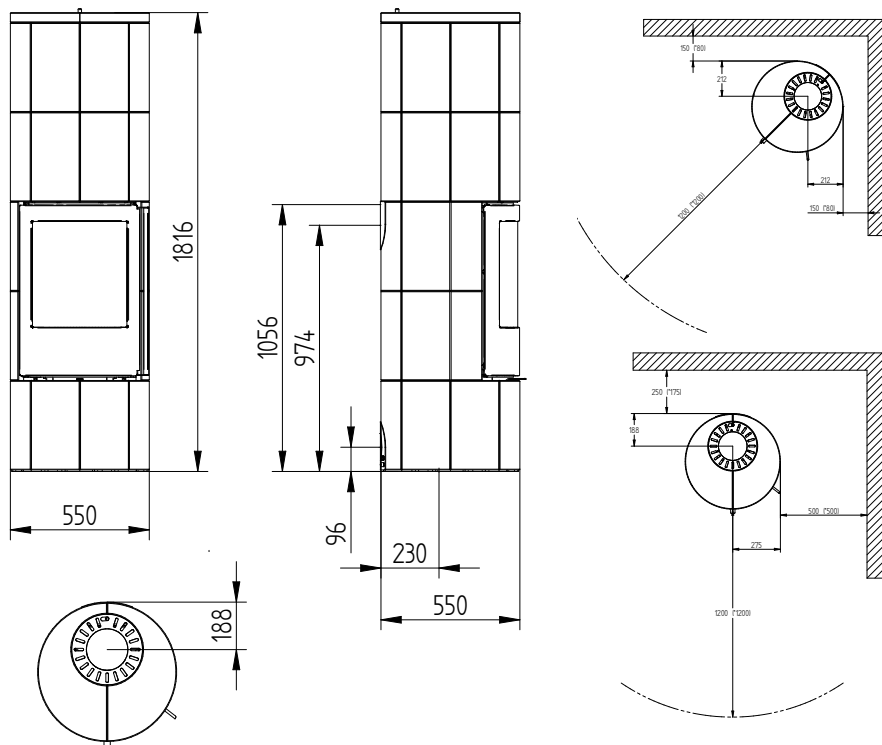

TROJA 46

SOAPSTONE

TROJA SERIES

High visibility of the flame and high
heat release
High efficiency
Strong convection
Timeless design

DuplicAir® for simpel and easy air control
Cast iron door
Self-closing door with magnets
Fresh air inlet included
Convection grill on top
Cast iron bottom
Molded vermiculite
Self-cleaning window
Cold handle
5 year warranty
Start-up function

Can be purchased
Accumulation stone (363 kg)
Customized floorplate out of 6 mm glass



Find all models here
JYDEPEJSEN.COM




TECHNICAL DATA TROJA 46 SOAPSTONE

Min./max. output	3 - 8 kW
Mean CO-emission	1216 mg/Nm ³
Recommended chimney draft	12 pa
Weight	481 kg
Smoke outlet	Ø 150 mm
Diameter of fresh air intake	Ø 100 mm
Combustion chamber	412 x 368 x 407 mm
Efficiency	79%
Flue gas mass flow	6,5 G/S
Flue gas temperature	366 °C
Dust emission	15 mg/Nm ³
Type classification	CA
Defra / Area Smoke Control	✓
§15A.....	✓

CE approved
Defra approved

A

*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

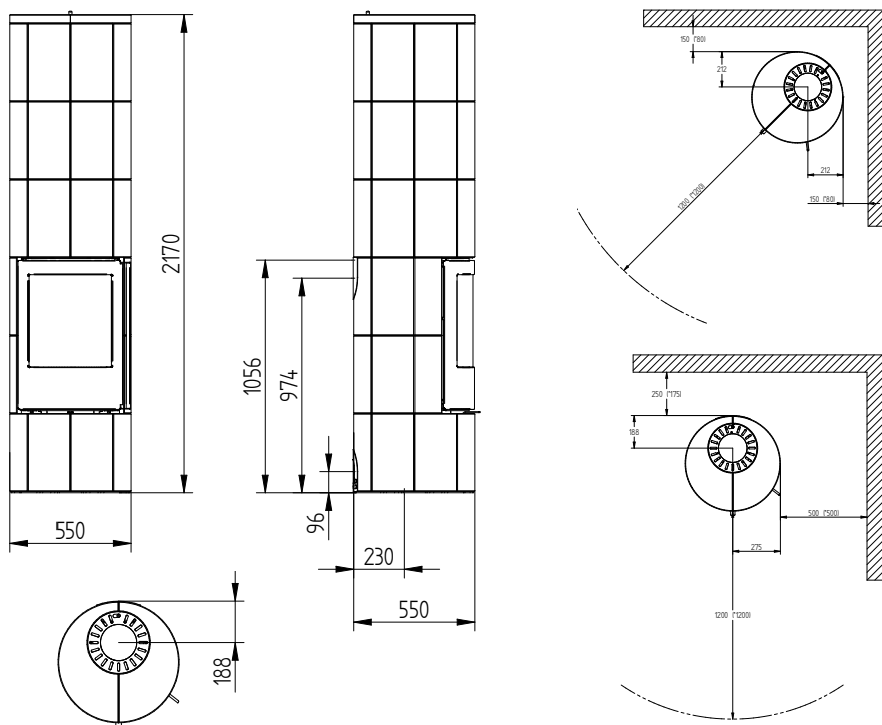

TROJA 46

DARK SANDSTONE

TROJA SERIES

High visibility of the flame and high
heat release
High efficiency
Strong convection
Timeless design

DuplicAir[®] for simpel and easy air control
Cast iron door
Self-closing door with magnets
Fresh air inlet included
Convection grill on top
Cast iron bottom
Molded vermiculite
Self-cleaning window
Cold handle
5 year warranty
Start-up function

Can be purchased

Accumulation stone (363 kg)
Customized floorplate out of 6 mm glass



Find all models here
JYDEPEJSEN.COM

TECHNICAL DATA TROJA 46 DARK SANDSTONE

Min./max. output	3 - 8 kW
Mean CO-emission	1216 mg/Nm ³
Recommended chimney draft	12 pa
Weight	533 kg
Smoke outlet	Ø 150 mm
Diameter of fresh air intake	Ø 100 mm
Combustion chamber	412 x 368 x 407 mm
Efficiency	79%
Flue gas mass flow	6,5 G/S
Flue gas temperature	366 °C
Dust emission	15 mg/Nm ³
Type classification	CA
Defra / Area Smoke Control	✓
§15A.....	✓

CE approved
Defra approved

A

*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

