

# ZETA

## FREESTANDING CORTEEN

### ZETA SERIES

---

Wood-burning stove and firewood  
storage in one  
High efficiency  
Strong convection  
Timeless design

DuplicAir® for simpel and easy  
air control  
Full glass front  
Corten steel or black  
Cold handle  
Jydepejs H530 insert  
Space for large pieces of firewood  
Molded vermiculite  
Self-cleaning window  
5 year warranty

**Can be purchased**  
Fresh air inlet ø 100 mm.



---

Find all models here  
**JYDEPEJSEN.COM**




## TECHNICAL DATA ZETA FREESTANDING CORTEEN

|                                    |                         |
|------------------------------------|-------------------------|
| Min./max. output .....             | 4 - 9 kW                |
| Mean CO-emission .....             | 1072 mg/Nm <sup>3</sup> |
| Recommended chimney draft .....    | 12 pa                   |
| Weight .....                       | 170 kg                  |
| Smoke outlet .....                 | Ø 150 mm                |
| Diameter of fresh air intake ..... | Ø 100 mm                |
| Combustion chamber .....           | 350 x 600 x 300 mm      |
| Efficiency .....                   | 75%                     |
| Flue gas mass flow .....           | 7,8 G/S                 |
| Flue gas temperature .....         | 415 °C                  |
| Dust emission .....                | 37 mg/Nm <sup>3</sup>   |
| Type classification .....          | BE                      |

CE approved

**A**

\*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

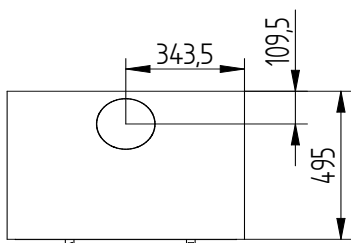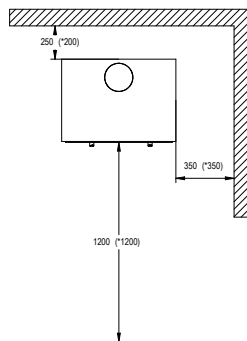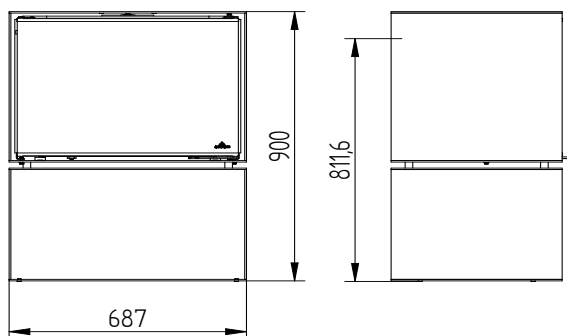

# ZETA

## FREESTANDING BLACK

### ZETA SERIES

---

Wood-burning stove and firewood storage in one  
High efficiency  
Strong convection  
Timeless design

DuplicAir® for simple and easy air control  
Full glass front  
Corten steel or black  
Cold handle  
Jydepejs H530 insert  
Space for large pieces of firewood  
Molded vermiculite  
Self-cleaning window  
5 year warranty

**Can be purchased**  
Fresh air inlet ø 100 mm.



---

Find all models here  
**JYDEPEJSEN.COM**




## TECHNICAL DATA ZETA FREESTANDING BLACK

|                                    |                         |
|------------------------------------|-------------------------|
| Min./max. output .....             | 4 - 9 kW                |
| Mean CO-emission .....             | 1072 mg/Nm <sup>3</sup> |
| Recommended chimney draft .....    | 12 pa                   |
| Weight .....                       | 170 kg                  |
| Smoke outlet .....                 | Ø 150 mm                |
| Diameter of fresh air intake ..... | Ø 100 mm                |
| Combustion chamber .....           | 350 x 600 x 300 mm      |
| Efficiency .....                   | 75%                     |
| Flue gas mass flow .....           | 7,8 G/S                 |
| Flue gas temperature .....         | 415 °C                  |
| Dust emission .....                | 37 mg/Nm <sup>3</sup>   |
| Type classification .....          | BE                      |

CE approved

**A**

\*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

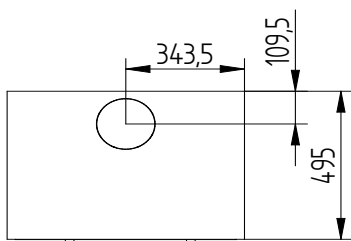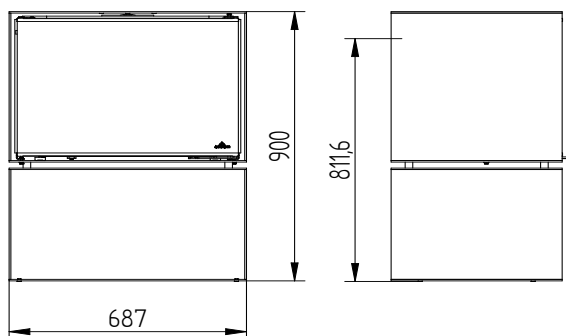

# ZETA

## WALLCORTEEN

### ZETA SERIES

---

Wood-burning stove and firewood  
storage in one  
High efficiency  
Strong convection  
Timeless design

DuplicAir® for simple and easy  
air control  
Full glass front  
Corten steel or black  
Cold handle  
Jydepejs H530 insert  
Space for large pieces of firewood  
Molded vermiculite  
Self-cleaning window  
5 year warranty

**Can be purchased**  
Fresh air inlet ø 100 mm.



---

Find all models here  
**JYDEPEJSEN.COM**



## TECHNICAL DATA ZETA WALL CORTEEN

|                                    |                         |
|------------------------------------|-------------------------|
| Min./max. output .....             | 4 - 9 kW                |
| Mean CO-emission .....             | 1072 mg/Nm <sup>3</sup> |
| Recommended chimney draft .....    | 12 pa                   |
| Weight .....                       | 122 kg                  |
| Smoke outlet .....                 | Ø 150 mm                |
| Diameter of fresh air intake ..... | Ø 100 mm                |
| Combustion chamber .....           | 350 x 600 x 300 mm      |
| Efficiency .....                   | 75%                     |
| Flue gas mass flow .....           | 7,8 G/S                 |
| Flue gas temperature .....         | 415 °C                  |
| Dust emission .....                | 37 mg/Nm <sup>3</sup>   |
| Type classification .....          | BE                      |

CE approved

**A**

\*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

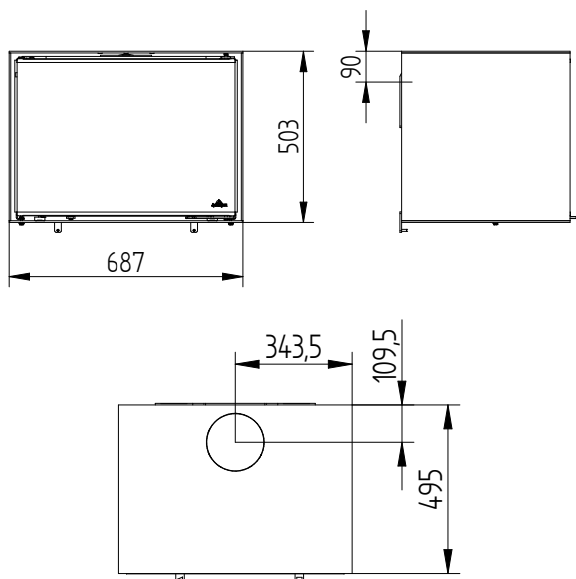

# ZETA

## WALL BLACK

### ZETA SERIES

---

Wood-burning stove and firewood storage in one  
High efficiency  
Strong convection  
Timeless design

DuplicAir<sup>®</sup> for simpel and easy air control  
Full glass front  
Corten steel or black  
Cold handle  
Jydepejs H530 insert  
Space for large pieces of firewood  
Molded vermiculite  
Self-cleaning window  
5 year warranty

**Can be purchased**  
Fresh air inlet ø 100 mm.



---

Find all models here  
**JYDEPEJSEN.COM**



## TECHNICAL DATA ZETA WALL BLACK

|                                    |                         |
|------------------------------------|-------------------------|
| Min./max. output .....             | 4 - 9 kW                |
| Mean CO-emission .....             | 1072 mg/Nm <sup>3</sup> |
| Recommended chimney draft .....    | 12 pa                   |
| Weight .....                       | 122 kg                  |
| Smoke outlet .....                 | Ø 150 mm                |
| Diameter of fresh air intake ..... | Ø 100 mm                |
| Combustion chamber .....           | 350 x 600 x 300 mm      |
| Efficiency .....                   | 75%                     |
| Flue gas mass flow .....           | 7,8 G/S                 |
| Flue gas temperature .....         | 415 °C                  |
| Dust emission .....                | 37 mg/Nm <sup>3</sup>   |
| Type classification .....          | BE                      |

CE approved

**A**

\*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

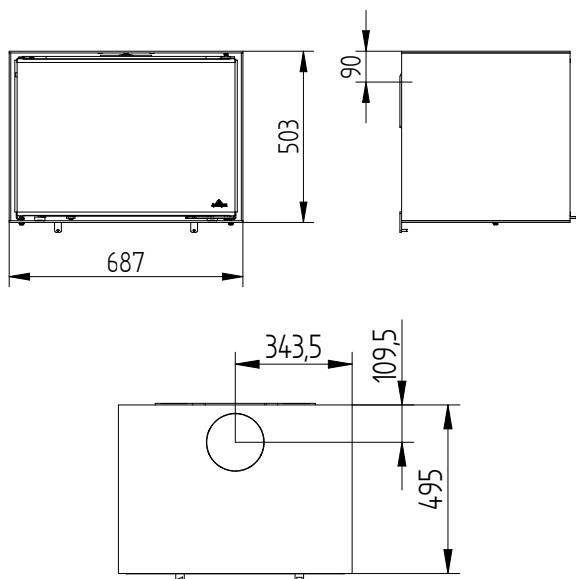

# ZETA

## BASE CORTEEN

### ZETA SERIES

---

Wood-burning stove and firewood storage in one  
High efficiency  
Strong convection  
Timeless design

DuplicAir® for simple and easy air control  
Full glass front  
Corten steel or black  
Cold handle  
Jydepejs H530 insert  
Space for large pieces of firewood  
Molded vermiculite  
Self-cleaning window  
5 year warranty

**Can be purchased**  
Fresh air inlet ø 100 mm.



---

Find all models here  
**JYDEPEJSEN.COM**





## TECHNICAL DATA ZETA BASE CORTEEN

|                                    |                         |
|------------------------------------|-------------------------|
| Min./max. output .....             | 4 - 9 kW                |
| Mean CO-emission .....             | 1072 mg/Nm <sup>3</sup> |
| Recommended chimney draft .....    | 12 pa                   |
| Weight .....                       | 144 kg                  |
| Smoke outlet .....                 | Ø 150 mm                |
| Diameter of fresh air intake ..... | Ø 100 mm                |
| Combustion chamber .....           | 350 x 600 x 300 mm      |
| Efficiency .....                   | 75%                     |
| Flue gas mass flow .....           | 7,8 G/S                 |
| Flue gas temperature .....         | 415 °C                  |
| Dust emission .....                | 37 mg/Nm <sup>3</sup>   |
| Type classification .....          | BE                      |

CE approved

**A**

\*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

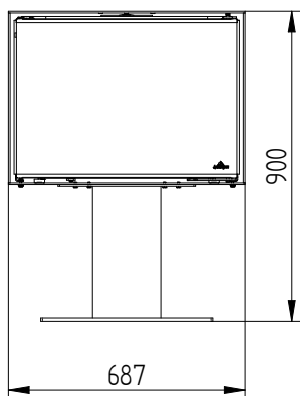

# ZETA

## BASE BLACK

### ZETA SERIES

---

Wood-burning stove and firewood storage in one  
High efficiency  
Strong convection  
Timeless design

DuplicAir® for simpel and easy air control  
Full glass front  
Corten steel or black  
Cold handle  
Jydepejs H530 insert  
Space for large pieces of firewood  
Molded vermiculite  
Self-cleaning window  
5 year warranty

**Can be purchased**  
Fresh air inlet ø 100 mm.



---

Find all models here  
**JYDEPEJSEN.COM**

## TECHNICAL DATA ZETA BASE BLACK

|                                    |                         |
|------------------------------------|-------------------------|
| Min./max. output .....             | 4 - 9 kW                |
| Mean CO-emission .....             | 1072 mg/Nm <sup>3</sup> |
| Recommended chimney draft .....    | 12 pa                   |
| Weight .....                       | 144 kg                  |
| Smoke outlet .....                 | Ø 150 mm                |
| Diameter of fresh air intake ..... | Ø 100 mm                |
| Combustion chamber .....           | 350 x 600 x 300 mm      |
| Efficiency .....                   | 75%                     |
| Flue gas mass flow .....           | 7,8 G/S                 |
| Flue gas temperature .....         | 415 °C                  |
| Dust emission .....                | 37 mg/Nm <sup>3</sup>   |
| Type classification .....          | BE                      |

CE approved

**A**

\*The numbers in parentheses show the distance to combustibles, when fitted with insulated flue.

