



DANISH  
TECHNOLOGICAL  
INSTITUTE

## DANISH TECHNOLOGICAL INSTITUTE

Accredited to testing according to ISO/EN 17025 by DANAK #300

[www.danak.dk](http://www.danak.dk)

CPR NANDO Notified Body #1235 [www.ec.europa.eu](http://www.ec.europa.eu)

Teknologiparken  
Kongsvang Allé 29  
DK-8000 Aarhus C  
Phone +45 72 20 10 00

Info@teknologisk.dk

# Assessment of Performance Report

## 1235-CPR-ELAB-2549

In compliance with *Regulation (EU) No 305/2011 of the European Parliament and of the Council of 9 March 2011* (the Construction products Regulation or CPR), this Assessment of Performance Report applies to the construction product

## PRODUCT(S)

**Local spaceheater intended for residential heating, Country 765 and with Country 575 as a variant**

**placed on the market under the name or trademark of Jydepejsen Denmark A/S**

This Assessment of Performance Report attests that the performance of the above-mentioned construction product has been assessed in accordance with the harmonised standard

## EN 16510-2-1:2022

under AVCP system 3 with regard to the essential characteristics listed below

Essential characteristic Clause No. - Description	Performance Level or class, unit(s)	Basis for the assessment of performance
A full assessment of all essential characteristics and other properties	Please see annexes 1-6 for details	300-ELAB-2549-EN issued the 23. July 2021 (output) 300-ELAB-2032-EN issued the 31. July 2014 (safety) DVR report ELAB 2549 issued the 8. July 2025  For other issues with no bearing on conformity assessment, such as description of the stove or the air system or installation requirements, please refer to the test report quoted above.

This Assessment of Performance Report covers only the above-mentioned essential characteristic(s). It is not an exhaustive statement of the performance of the product. The manufacturer is entitled to declare the performance of other essential characteristics than those mentioned above.

This Assessment of Performance Report will remain applicable as long as neither the harmonised standard, the construction product, nor the AVCP methods are modified significantly.



Revision history	
This version is the initial Assessment of Performance Report (Rev 0) issued the 19. August 2025	
Revision 1:	1235-CPR-ELAB-XXXX-rev1, dated dd-mm-yyyy
Cause of revision:	#description of cause
Revision 2:	1235-CPR-ELAB-XXXX-rev2, dated dd-mm-yyyy
Cause of revision:	#description of cause

Annex 1: BWRs and essential characteristics

Annex 2: EL Calculations

Annex 3: Images and graphs

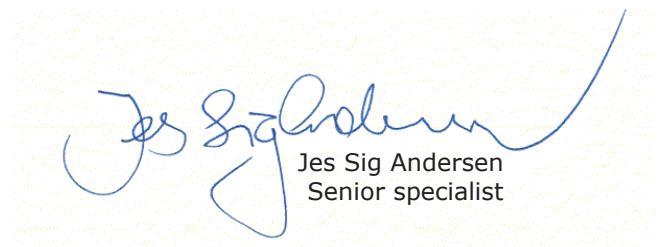
Annex 4: Descriptive features

Annex 5: Roomsealed properties

Annex 6: Declaration of model conformity

Technical documentation

19. August 2025  
DTI Stoves and boiler testing laboratory

  
Jes Sig Andersen  
Senior specialist

<b>Product:</b>	Solid Fuel Local Space Heaters		
<b>Intended use:</b>	Space heating in residential buildings		
Essential characteristics	Clauses of this European Standard related to essential characteristics	Classes and/or threshold levels	Notes
<b>Mechanical resistance and stability (BWR 1)</b>			
Load bearing capacity	4.1	20	Given in kg
<b>Safety in case of fire (BWR 2)</b> Data format: clearance single wall flue / clearance insulated flue			
Protection of combustible materials	4.2	50	Minimum distance to the hearth <sup>1</sup> ( $d_B$ ) in mm
		156	Minimum distance from the hearth <sup>1</sup> to the bottom edge of the loading door ( $d_B'$ ) in mm
		440	Minimum distance to combustible materials – floor in front ( $d_F$ ) in mm
		750	Minimum distance to combustible materials – ceiling ( $d_C$ ) in mm
		275 / 225	Minimum distance to combustible materials – rear ( $d_R$ ) in mm
		450 / 425	Minimum distance to combustible materials – side ( $d_S$ ) in mm
		N/A	Minimum distance to combustible materials – side radiation area ( $d_L$ ) in mm
		850 / 850	Minimum distance to adjacent combustible materials (e.g. furniture) ( $d_P$ ) in mm
		300 / 270	Minimum distance to combustible material – 45° corner wall ( $d_{S(c)}$ )

<b>Product:</b>	Solid Fuel Local Space Heaters		
<b>Intended use:</b>	Space heating in residential buildings		
Essential characteristics	Clauses of this European Standard related to essential characteristics	Classes and/or threshold levels	Notes
		T400-N1-D-L50050-G100	Minimum grade of insulated flue
Dimension of the lower convection air intake of the installation enclosure		N/A	cm <sup>2</sup>
Dimension of the upper convection air intake of the installation enclosure		N/A	cm <sup>2</sup>
Applicable chimney class		T400 G	Minimum grade of a system steel chimney

Note 1) Any hearth underneath the stove and 440 mm in front of the stove must be made of non-combustible material according to national building regulations

<b>Hygiene, health and the environment (BWR 3)</b>			
At nominal heat output: (all expressed in mg/Nm <sup>3</sup> rel. 13% O <sub>2</sub> )			
Carbon monoxide emission (CO)	4.3	1492	Default parameter
Nitrogen oxides (NO <sub>x</sub> ) emissions	4.4	105	Default parameter
Emission of organic gaseous carbon (OGC)	4.5	111	Default parameter
Particulate matter emissions (PM)	4.6	29	Default parameter
At part load heat output: (all expressed in mg/Nm <sup>3</sup> rel. 13% O <sub>2</sub> ) there are currently no thresholds for part load performance			
Carbon monoxide emission (CO)	4.3	-	To be stated if part load heat output is declared
Nitrogen oxides (NO <sub>x</sub> ) emissions	4.4	-	To be stated if part load heat output is declared
Emission of organic gaseous carbon (OGC)	4.5	-	To be stated if part load heat output is declared
Particulate matter emissions (PM)	4.6	-	To be stated if part load heat output is declared
<b>Safety and accessibility in use (BWR 4)</b>			
Data for installation to a chimney at nominal heat output:			
Flue gas outlet temperature	4.7.2	275	Given in °C
Minimum flue draught	4.7.4	12	Given in Pa
Flue gas mass flow	4.7.6	4.5	Given in g/s
Data for installation to a chimney at part load heat output:			
Flue gas outlet temperature	4.7.3	-	Given in °C
Minimum flue draught	4.7.5	-	Given in Pa
Flue gas mass flow	4.7.7	-	Given in g/s
Data for installation to a chimney regarding fire safety on safety test heat output:			
Fire safety of installation to the chimney	4.7.8	Pass	Provided that all surface temp < 65 K
<b>Protection against noise (BWR 5) – is not applicable for local space heaters</b>			
Sound level	4.5 of EN16510-1	NA	Given in dB(A)

<b>Energy economy and heat retention (BWR 6)</b>			
Appliance's thermal output and energy efficiency at nominal heat output:			
Number of burn cycles NHO	Part 2 table A.2	3	#
Refuelling interval at NHO	Part 2 table A.2	45	Given in minutes (>40 min)
Refuelling interval at slow comb	Part 2 table A.2	N/A	Given in minutes
Space heat output measured	4.8.1	5.2	Given in kW
Water heat output, if existing	4.8.2	N/A	Given in kW
Efficiency	4.8.3	81	Given in %
Appliance's thermal output and energy efficiency at part load heat output:			
Number of burn cycles NHO	Part 2 table A.2	-	#
Refuelling interval at Part load	Part 2 table A.2	-	Given in minutes
Space heat output	4.8.4	-	Given in kW
Water heat output, if existing	4.8.5	-	Given in kW
Efficiency	4.8.6	-	Given in %
Space heating efficiency			
Seasonal space heating efficiency at appliance's nominal heat output	4.8.7	71	Given in %
Energy efficiency index	4.8.8	108	Index (EEI) calculated according to A.6.2.1.6
		Class A+	Energy efficiency classification determined according to 4.8.8, Table 7
Electric power consumption at appliance's nominal heat output, if existing	4.8.9	-	Given in kW
Electric power consumption at appliance's part load heat output, if existing	4.8.10	-	Given in kW
Standby mode power consumption, if existing	4.8.11	-	Given in kW
<b>Sustainable use of natural resources (BWR 7)</b>			
Environmental sustainability	4.9	NPD	Environmental sustainability elements to be declared according to 4.9